



Illustrated Parts Manual

Model H340AJ

PVC
2001
2007

P/N
31215008

January 11, 2021 - Rev D

ANSI

CE



AS/NZS



An Oshkosh Corporation Company

REVISION LOG

REVISION LOG:


November 1, 2019 - A - Original Issue of Manual

June 15, 2020 - B - Revised Manual

August 1, 2020 - C - Revised Manual (Edited to B/M 1001247761 Revision E)

January 11, 2021 - D - Revised Manual (Edited to B/M 1001247761 Revision E)

GENERAL INFORMATION

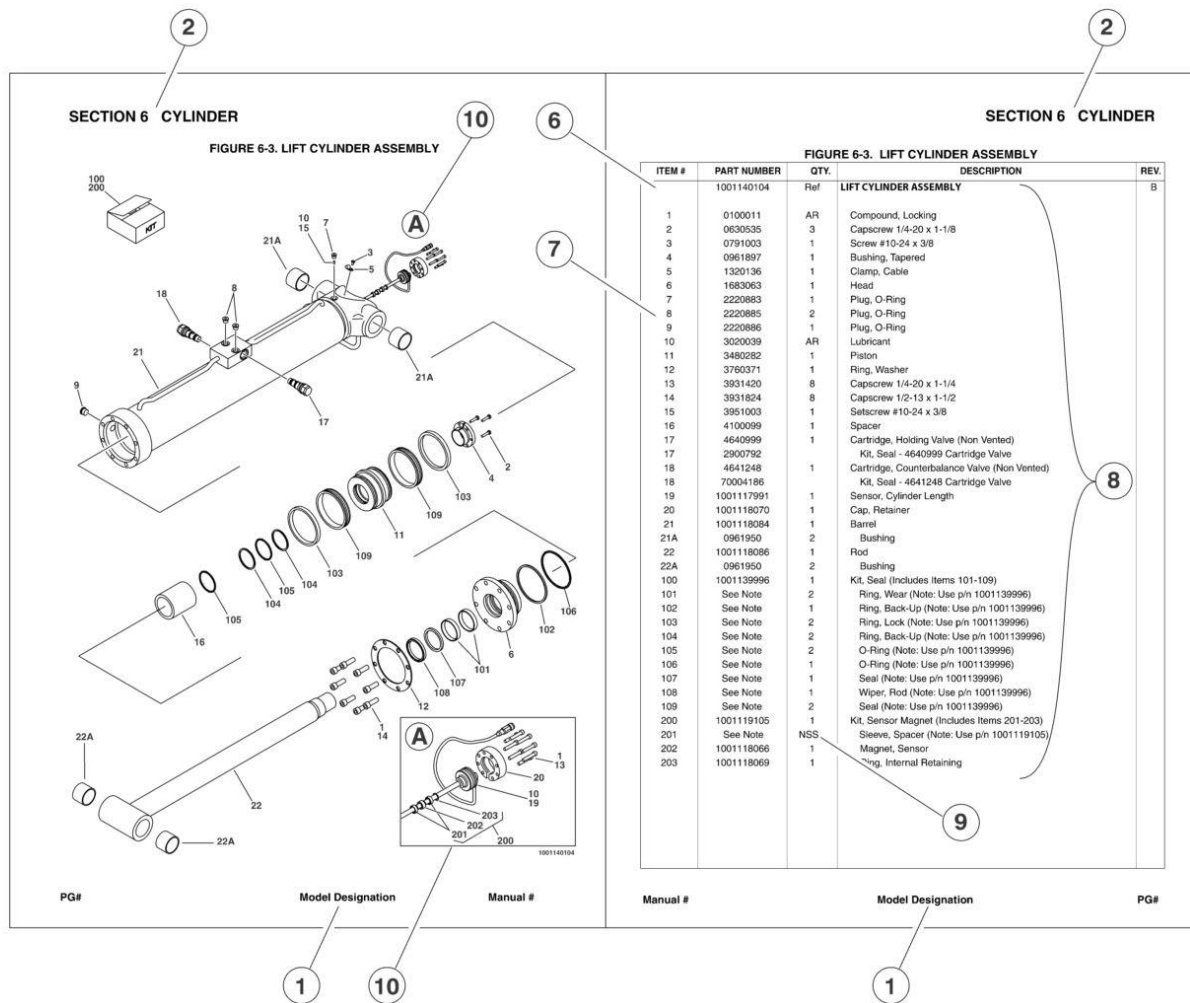

1) MACHINE IDENTIFICATION

Machines are identified by model and in some cases a combination of models, serial number (SN) or regional standard (i.e. ANSI, CE, CSA). Components may also be identified by SN or manufacturer. common components that may be identified by these characteristics are engines and hydraulic components.

2) PARTS MANUAL ORGANIZATION

Product information in this manual is organized under section titles. Frame, Cylinder, Hydraulic and Electrical are a few examples. Each section is organized by figure and page number. The information within the Figure is then organized by item number, part number, description and corresponding illustration(s).

3) TABLE OF CONTENTS

A table of contents is found toward the beginning of the manual. Figure number, description and page number are provide for quick reference to the page containing the related information.

4) RECOMMENDED SPARE PARTS

The Recommended Spare Parts, located near the end of the manual, reference most frequently used maintenance parts.

5) PART NUMBER INDEX

A numerical index listing all part numbers and the corresponding page number(s) appears at the back of the manual.

GENERAL INFORMATION

6) NON-SERVICED PARTS

In some instances, it is necessary to display non-serviced parts, assemblies or installations. In the case of assemblies and installations there will be a Ref in the Qty column. In case of parts that are not available for service within assemblies and components, there will be a NSS (Not Sold Separately) or NLA (No Longer Available) listed in the Qty. column of the manual.

7) PARTS LIST ITEM NUMBERS

Numbers shown in the item# column correspond to numbers used in the associated illustration (s). Item numbers which are missing from the sequence in the parts list are not used on that page

8) INDENTED PARTS DESCRIPTION

An indented part description is included in the item under which it is indented.

9) ABBREVIATION AND SYMBOLS

AC..... Alternating Current
ADE.....Advanced Design Electronics
ANSI..... American National Standards Institute
AR..... As Required
ASSY..... Assembly
AUX.....Auxiliary
AWG..... American Wire Gauge
B/M.....Bill of Material
CE..... European Conformity
CCW..... Counter Clockwise
cm.....Centimeter
CW..... Clockwise
CSA..... Canadian Standard Association
CYL.....Cylinder
DIA.....Diameter
DC.....Direct Current
EMS..... Emergency Stop
ENG.....Engine
FT(ft).....Feet
GA(Ga).....Gauge
HYD.....Hydraulic
Hz.....Hertz
ID.....Inside Diameter
in.....inches
ISO.....International Organization for Standards
JIC.....Joint Industry Council
KG.....Kilogram
L.....Liter
LB.....Pounds

LCD..... Liquid Crystal Display
LED..... Light Emitting Diodes
LH..... Left Hand
LSS..... Load Sensing System
M(m).....Metric/Meter
MM (mm).....Milimeter
mA.....Miliamps
NLA.....No Longer Available
NPT..... National Pipe Threads
NSS.....Not Sold Separately
OD.....Outside Diameter
ORB..... O-Ring Boss
ORFS..... O-Ring Face Seal
OZ (oz).....Ounces
PG.....Page
P/N.....Part Number
qt.....Quarts
QTY.....Quantity
REF.....Reference
REV.....Revision Level
RH.....Right Hand
SAE..... Society of Automotive Engineers
SN.....Serial Number
SPEC(S).....Specifications
T/T.....Turntable
UGM.....Universal Ground Module
V.....Volts
W.....Watts
#.....Number

10) ILLUSTRATION REFERENCE LETTERS

When necessary, illustrations may contain reference letters that are intended to track information (i. e. hoses, harness) from one point to another or to track visual enlargement of components to show details that may be located in another area on the illustration.

Note: Due to continuous product improvements, JLG Industries, Inc. reserves the right to make specification changes without prior notification. Contact JLG Industries, Inc. for updated information.

TABLE OF CONTENTS

SECTION 1 - FRAME	11
FIGURE 1-1. STEERING INSTALLATION	12
FIGURE 1-2. OSCILLATING AXLE INSTALLATION	14
FIGURE 1-3. CONTROL VALVES INSTALLATION - FRAME	16
FIGURE 1-4. OSCILLATING AXLE VALVE ASSEMBLY	18
FIGURE 1-5. DRIVE INSTALLATION	20
FIGURE 1-6. DRIVE MOTOR ASSEMBLY	22
FIGURE 1-7. DRIVE HUB ASSEMBLY	24
FIGURE 1-8. TIRE AND WHEEL INSTALLATION - 7X18 SOLID	26
FIGURE 1-9. TIRE AND WHEEL INSTALLATION - 7X18 SOLID NON-MARKING	28
FIGURE 1-10. TIRE AND WHEEL INSTALLATION - 9X20 FOAM-FILLED	30
FIGURE 1-11. TIRE AND WHEEL INSTALLATION - 9X20 FOAM-FILLED NON-MARKING	32
FIGURE 1-12. BATTERIES INSTALLATION	34
FIGURE 1-13. ELECTRICAL PLATE ASSEMBLY	36
FIGURE 1-14. FRAME SHIELDS INSTALLATION	38
SECTION 2 - TURNTABLE	41
FIGURE 2-1. CONTROL VALVE INSTALLATION - TURNTABLE	42
FIGURE 2-2. MAIN CONTROL VALVE ASSEMBLY	44
FIGURE 2-3. SWING DRIVE INSTALLATION	46
FIGURE 2-4. SWING MOTOR ASSEMBLY	48
FIGURE 2-5. SWING BEARING ASSEMBLY	50
FIGURE 2-6. TANKS AND PUMP ASSEMBLY	52
FIGURE 2-7. HYDRAULIC PUMP MOTOR ASSEMBLY	54
FIGURE 2-8. GROUND CONTROLS INSTALLATION - ALL SPECS EXCEPT CE SPECS	56
FIGURE 2-9. GROUND CONTROLS ASSEMBLY - ALL SPECS EXCEPT CE SPECS	58
FIGURE 2-10. GROUND CONTROL INSTALLATION - CE SPEC	60
FIGURE 2-11. GROUND CONTROL ASSEMBLY - CE SPEC	62
FIGURE 2-12. LIGHT PANEL INSTALLATION	64
FIGURE 2-13. BATTERY CHARGER INSTALLATION - 110V PLUG	66
FIGURE 2-14. BATTERY CHARGER INSTALLATION - LOCALLY SUPPLIED PLUG	68
FIGURE 2-15. BATTERY CHARGER ASSEMBLY	70
FIGURE 2-16. ELECTRICAL COMPONENTS INSTALLATION	72
FIGURE 2-17. BEACON LIGHT INSTALLATION - AMBER (OPTIONAL)	76
FIGURE 2-18. BEACON LIGHT INSTALLATION - BLUE	78
FIGURE 2-19. BEACON LIGHT INSTALLATION - RED	80
FIGURE 2-20. WHITE NOISE ALARM INSTALLATION	82
FIGURE 2-21. HOODS INSTALLATION	84
FIGURE 2-22. HOOD ASSEMBLY - TANK SIDE	88
FIGURE 2-23. HOOD ASSEMBLY - ENGINE SIDE	90
SECTION 3 - ENGINE	93
FIGURE 3-1. KUBOTA ENGINE INSTALLATION	94
FIGURE 3-2. KUBOTA ENGINE AND GENERATOR SUB-ASSEMBLY	98
FIGURE 3-3. KUBOTA ENGINE ASSEMBLY	100
FIGURE 3-4. KUBOTA ENGINE COMPONENTS	104
FIGURE 3-5. ENGINE COUPLING ASSEMBLY	108
FIGURE 3-6. GENERATOR ASSEMBLY	110
FIGURE 3-7. CATALYTIC MUFFLER INSTALLATION - OPTIONAL	112
SECTION 4 - BOOM	115
FIGURE 4-1. BOOM AND CYLINDERS INSTALLATION - WITHOUT ARCTIC PACKAGE	116
FIGURE 4-2. BOOM AND CYLINDERS INSTALLATION - WITH ARCTIC PACKAGE	118
FIGURE 4-3. TOWER BOOM ASSEMBLY	120
FIGURE 4-4. MAIN BOOM ASSEMBLY - WITH ARCTIC PACKAGE	122
FIGURE 4-5. MAIN BOOM ASSEMBLY - WITHOUT ARCTIC PACKAGE	124
FIGURE 4-6. JIB ASSEMBLY - WITHOUT ARCTIC PACKAGE	126
FIGURE 4-7. JIB ASSEMBLY - WITH ARCTIC PACKAGE	128
FIGURE 4-8. PLATFORM ROTATOR ASSEMBLY - WITHOUT ARCTIC PACKAGE	130
FIGURE 4-9. PLATFORM ROTATOR ASSEMBLY - WITH ARCTIC PACKAGE	132
FIGURE 4-10. PLATFORM SUPPORT INSTALLATION - WITH 1 CELL LSS	134
FIGURE 4-11. POWER TRACK INSTALLATION	136

TABLE OF CONTENTS

FIGURE 4-12. CONTROL VALVES INSTALLATION - BOOM	138
FIGURE 4-13. FLY BOOM VALVE ASSEMBLY	140
FIGURE 4-14. BOOM UPRIGHT VALVE ASSEMBLY	142
SECTION 5 - PLATFORM	145
FIGURE 5-1. PLATFORM ASSEMBLY - 30IN X 4FT (76CM X 1.22M) - GATE ENTRY	146
FIGURE 5-2. PLATFORM ASSEMBLY - 30IN X 5FT (76CM X 1.52M) - GATE ENTRY	148
FIGURE 5-3. PLATFORM ASSEMBLY - 30IN X 4FT (76CM X 1.22M) - DROP BAR ENTRY	150
FIGURE 5-4. PLATFORM ASSEMBLY - 30IN X 5FT (76CM X 1.52M) - DROP BAR ENTRY	152
FIGURE 5-5. PLATFORM ASSEMBLY - 30IN X 3FT (76CM X 91.5CM) - WITH DROP BAR	154
FIGURE 5-6. TRAY INSTALLATION	156
FIGURE 5-7. CONSOLE AND FOOTSWITCH INSTALLATION	158
FIGURE 5-8. CONSOLE AND FOOTSWITCH ASSEMBLY	160
FIGURE 5-9. LIGHT PANEL INSTALLATION	164
FIGURE 5-10. DRIVE/STEER CONTROLLER ASSEMBLY	166
FIGURE 5-11. LIFT/SWING CONTROLLER ASSEMBLY	168
FIGURE 5-12. FOOTSWITCH ASSEMBLY	172
FIGURE 5-13. SKYGUARD SYSTEM INSTALLATION	174
FIGURE 5-14. SKYEYE INSTALLATION	176
FIGURE 5-15. SKYLINE INSTALLATION	178
FIGURE 5-16. PIPE RACK INSTALLATION (AUSTRALIAN SPECS)	180
FIGURE 5-17. FALL ARREST INSTALLATION (BOLT - ON EXTERNAL) 4FFT/1.22M PLATFORM)	182
FIGURE 5-18. FALL ARREST INSTALLATION (BOLT-ON EXTERNAL) (5FT/1.52M PLATFORM)	184
SECTION 6 - CYLINDER	187
FIGURE 6-1. AXLE LOCKOUT CYLINDER ASSEMBLY	188
FIGURE 6-2. LEVEL (PLATFORM SLAVE) CYLINDER ASSEMBLY	190
FIGURE 6-3. LIFT (JIB) CYLINDER ASSEMBLY	192
FIGURE 6-4. LIFT (MAIN BOOM) CYLINDER ASSEMBLY	194
FIGURE 6-5. LIFT (TOWER BOOM) CYLINDER ASSEMBLY	196
FIGURE 6-6. MASTER CYLINDER ASSEMBLY	198
FIGURE 6-7. STEER CYLINDER ASSEMBLY	200
FIGURE 6-8. TELESCOPE CYLINDER ASSEMBLY	202
SECTION 7 - HYDRAULIC	205
FIGURE 7-1. HYDRAULIC SYSTEM INSTALLATION - WITHOUT ARCTIC PACKAGE	206
SECTION 8 - ELECTRICAL	213
FIGURE 8-1. AC BOX AT PLATFORM INSTALLATION - LOCALLY SUPPLIED COMPONENTS (ANSI EXPORT, AUSTRALIAN AND CHINA SPECS)	214
FIGURE 8-2. AC BOX AT PLATFORM INSTALLATION - LOCALLY SUPPLIED (CE SPEC)	216
FIGURE 8-3. AC BOX AT PLATFORM INSTALLATION - 110V (ANSI, ANSI EXPORT, CSA, JAPANESE AND CHINA SPECS)	218
FIGURE 8-4. AC BOX AT PLATFORM INSTALLATION - 110V IEC YELLOW (CE SPEC)	220
FIGURE 8-5. AC BOX AT PLATFORM INSTALLATION - 220V (CSA SPEC)	222
FIGURE 8-6. AC BOX AT PLATFORM INSTALLATION - 220V IEC BLUE (CE SPEC)	224
FIGURE 8-7. AC BOX AT PLATFORM INSTALLATION - 220V CEE7 POST GROUND WITH 70MM X 70MM BOX (CE SPEC)	226
FIGURE 8-8. AC BOX AT PLATFORM INSTALLATION - 220V CEE7 SIDE GROUND WITH 70MM X 70MM BOX (CE SPEC)	228
FIGURE 8-9. AC BOX AT PLATFORM INSTALLATION - 220V CEE7 POST GROUND WITH 2IN X 4IN BOX (CE SPEC)	230
FIGURE 8-10. AC BOX AT PLATFORM INSTALLATION - 220V CEE7 SIDE GROUND WITH 2IN X 4IN BOX (CE SPEC)	232
FIGURE 8-11. AC BOX AT PLATFORM INSTALLATION - 220V AFSINT 107 KEYED GROUND WITH 2IN X 4IN BOX (CE SPEC)	234
FIGURE 8-12. AC POWER TO PLATFORM CABLE - MAIN BOOM (WITHOUT ARTIC PACKAGE)	236
FIGURE 8-13. AC POWER TO PLATFORM CABLE - MAIN BOOM (WITH ARCTIC PACKAGE)	238
FIGURE 8-14. AC POWER TO PLATFORM CABLE - TOWER BOOM (WITHOUT ARTIC PACKAGE)	240
FIGURE 8-15. AC POWER TO PLATFORM CABLE - TOWER BOOM (WITH ARTIC PACKAGE)	242
FIGURE 8-16. BOOM CABLES, HARNESSES AND CLAMPS INSTALLATION - WITHOUT ARCTIC PACKAGE	244
FIGURE 8-17. BOOM CABLES, HARNESSES AND CLAMPS INSTALLATION - WITH ARCTIC PACKAGE	248
FIGURE 8-18. BOOM HARNESS - MAIN	252
FIGURE 8-19. BOOM HARNESS - TOWER	254
FIGURE 8-20. BREAKER BOX KIT (CE SPEC)	256
FIGURE 8-21. CHARGER HARNESS	258


TABLE OF CONTENTS

FIGURE 8-22. DRIVE CABLES INSTALLATION	260
FIGURE 8-23. DRIVE HARNESS - REAR RIGHT	262
FIGURE 8-24. DRIVE HARNESS - REAR LEFT	264
FIGURE 8-25. DRIVE HARNESS - FRONT WITH STEER	266
FIGURE 8-26. DRIVE HARNESS - FRONT WITHOUT STEER	268
FIGURE 8-27. ENGINE CABLES INSTALLATION	270
FIGURE 8-28. ENGINE HARNESS	272
FIGURE 8-29. GENERATOR HARNESS	274
FIGURE 8-30. GROUND CONTROL HARNESS	276
FIGURE 8-31. GROUND TO PLATFORM CABLE - MAIN BOOM (WITHOUT ARCTIC PACKAGE)	278
FIGURE 8-32. GROUND TO PLATFORM CABLE - MAIN BOOM (WITH ARCTIC PACKAGE)	280
FIGURE 8-33. GROUND TO PLATFORM CABLE - TOWER BOOM (WITHOUT ARCTIC PACKAGE)	282
FIGURE 8-34. GROUND TO PLATFORM CABLE - TOWER BOOM (WITH ARCTIC PACKAGE)	284
FIGURE 8-35. PLATFORM CONSOLE HARNESS - WITH SKYGUARD	286
FIGURE 8-36. PLATFORM INTERFACE HARNESS (PVC 2001)	290
FIGURE 8-37. PLATFORM INTERFACE HARNESS (PVC 2007)	292
FIGURE 8-38. PLATFORM TO BOOM VALVE HARNESS	294
FIGURE 8-39. AC BOX AT PLATFORM INSTALLATION - 110V IEC YELLOW (CE SPEC)	296
FIGURE 8-40. RECEPTACLE BOX KIT - 220V IEC BLUE (CE SPEC)	298
FIGURE 8-41. RECEPTACLE BOX KIT - 220V CEE7 POST GROUND 70MM X 70MM BOX (CE SPEC)	300
FIGURE 8-42. RECEPTACLE BOX KIT - 220V CEE7 SIDE GROUND 70MM X 70MM BOX (CE SPEC)	302
FIGURE 8-43. RECEPTACLE BOX KIT - 220V CEE7 POST GROUND 2IN X 4IN BOX (CE SPEC)	304
FIGURE 8-44. RECEPTACLE BOX KIT - 220V CEE7 SIDE GROUND 2IN X 4IN BOX (CE SPEC)	306
FIGURE 8-45. RECEPTACLE BOX KIT - 220V AFSINT 107 (CE SPEC)	308
FIGURE 8-46. SKYLINE HARNESS	310
FIGURE 8-47. SKYEYE INTERMEDIATE HARNESS	312
FIGURE 8-48. SKYEYE RECEIVER HARNESS (PVC 2001)	314
FIGURE 8-49. SKYEYE RECEIVER HARNESS (PVC 2007)	316
FIGURE 8-50. SKYEYE EMITTER HARNESS (PVC 2001)	318
FIGURE 8-51. SKYEYE EMITTER HARNESS (PVC 2007)	320
FIGURE 8-52. STROBE LIGHT HARNESS (BLUE AND RED LIGHTS)	322
FIGURE 8-53. TRACTION HARNESS (PVC 2001)	324
FIGURE 8-54. TRACTION HARNESS (PVC 2007)	326
FIGURE 8-55. TURNTABLE HARNESS	328
FIGURE 8-56. VALVE HARNESS	332
SECTION 9 - DECALS	335
FIGURE 9-1. DECALS INSTALLATION – ANSI, ANSI EXPORT CSA AND CHINA SPECS (ENGLISH)	336
FIGURE 9-2. DECALS INSTALLATION - AUSTRALIAN SPEC (ENGLISH)	338
FIGURE 9-3. DECALS INSTALLATION - BRAZIL SPEC (PORTUGUESE/SPANISH)	340
FIGURE 9-4. DECALS INSTALLATION - CE SPECS (ENGLISH)	342
FIGURE 9-5. DECALS INSTALLATION - CSA SPEC (FRENCH/ENGLISH)	344
FIGURE 9-6. DECALS INSTALLATION - CHINESE SPEC (CHINESE/ENGLISH)	346
FIGURE 9-7. DECALS INSTALLATION - JAPANESE SPEC (JAPANESE/ENGLISH)	348
FIGURE 9-8. DECALS INSTALLATION - KOREAN SPEC (KOREAN/ENGLISH)	350
FIGURE 9-9. DECALS INSTALLATION - LATIN AMERICA SPEC (SPANISH/ENGLISH)	352
FIGURE 9-10. OPTIONAL DECALS INSTALLATION	354
SECTION 10 - RECOMMENDED SERVICE PARTS STOCK	357
FIGURE 10-1. RECOMMENDED SERVICE PARTS STOCK	358
SECTION 11 - SPECIAL OPTIONS	361
FIGURE 11-1. SPECIAL OPTIONS	362
PART NUMBER INDEX	365

SECTION 1 - FRAME

12

H340AJ




ART_1001161115

FIGURE 1-1. STEERING INSTALLATION

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001161115	Ref	STEERING INSTALLATION	K
1	0100011	AR	Compound, Locking	
2	0701012	16	Bolt M10 X 25	
3	0701217	4	Bolt M12 X 45	
5	0760810	1	Bolt M8 X 20	
6	0761010	3	Bolt M10 X 20	
7	0761018	1	Bolt M10 X 50	
8	0962140	6	Bearing	
10	3841520	4	Keeper, Pin	
11	4740086	5	Washer, Thrust	
12	4812100	4	Washer M12	
13	1001116788	1	Steer Cylinder Assembly (See Separate Breakdown in CYLINDER Section)	
14	4740505	2	Washer, Thrust	
15	1001161110	1	Pin, Sensor	
16	1001161113	1	Bracket, Sensor Pin	
17	1001161114	1	Spacer	
18	1001161117	1	Switch, Rotary Angle Sensor	
18	4460536	1	Receptacle, Female - 3 Position	
18	4460464	1	Pin, Male	
19	1001168669	3	Pin	
20	1001169015	2	Spindle	
21	1001169028	2	Link, Tie Rod	
23	1001169030	4	Kingpin	
24	1001169129	4	Bearing	
25	1001188866	1	Bracket, Sensor	
26	0760818	1	Bolt M8 x 50	
27	4811900	2	Washer M8	
28	1001149160	1	Nut, Tinnerman M8	
29	1001155967	1	Holder, Connector	
30	1001208285	2	Washer	
31	4240018	2	Tie-Strap (Not Shown)	
32	1001164885	AR	Washer, Shim	

14

H340AJ



ART_1001169213


SECTION 1 - FRAME

FIGURE 1-2. OSCILLATING AXLE INSTALLATION

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001169213	Ref	OSCILLATING AXLE INSTALLATION	C
1	0100011	AR	Compound, Locking	
2	0761015	1	Bolt M10 x 35	
3	0761614	1	Bolt M16 x 30	
4	0961950	2	Bushing	
5	3020029	AR	Lubricant	
6	3422592	1	Pin, Axle Pivot	
7	3841258	1	Keeper, Pin	
8	4740158	1	Thrustwasher	
9	5241000	8	Washer M10	
10	5251012	4	Bolt M10 x 25	
11	1001116361	2	Lockout Cylinder Assembly (See Separate Breakdown in CYLINDER Section)	
12	1001118511	2	Pad, Wear	
13	1001118518	2	Shim 11Ga	
14	1001118519	4	Shim 16Ga	
15	1001169027	1	Axle	
16	1001210981	4	Shim	

SECTION 1 - FRAME

FIGURE 1-3. CONTROL VALVES INSTALLATION - FRAME

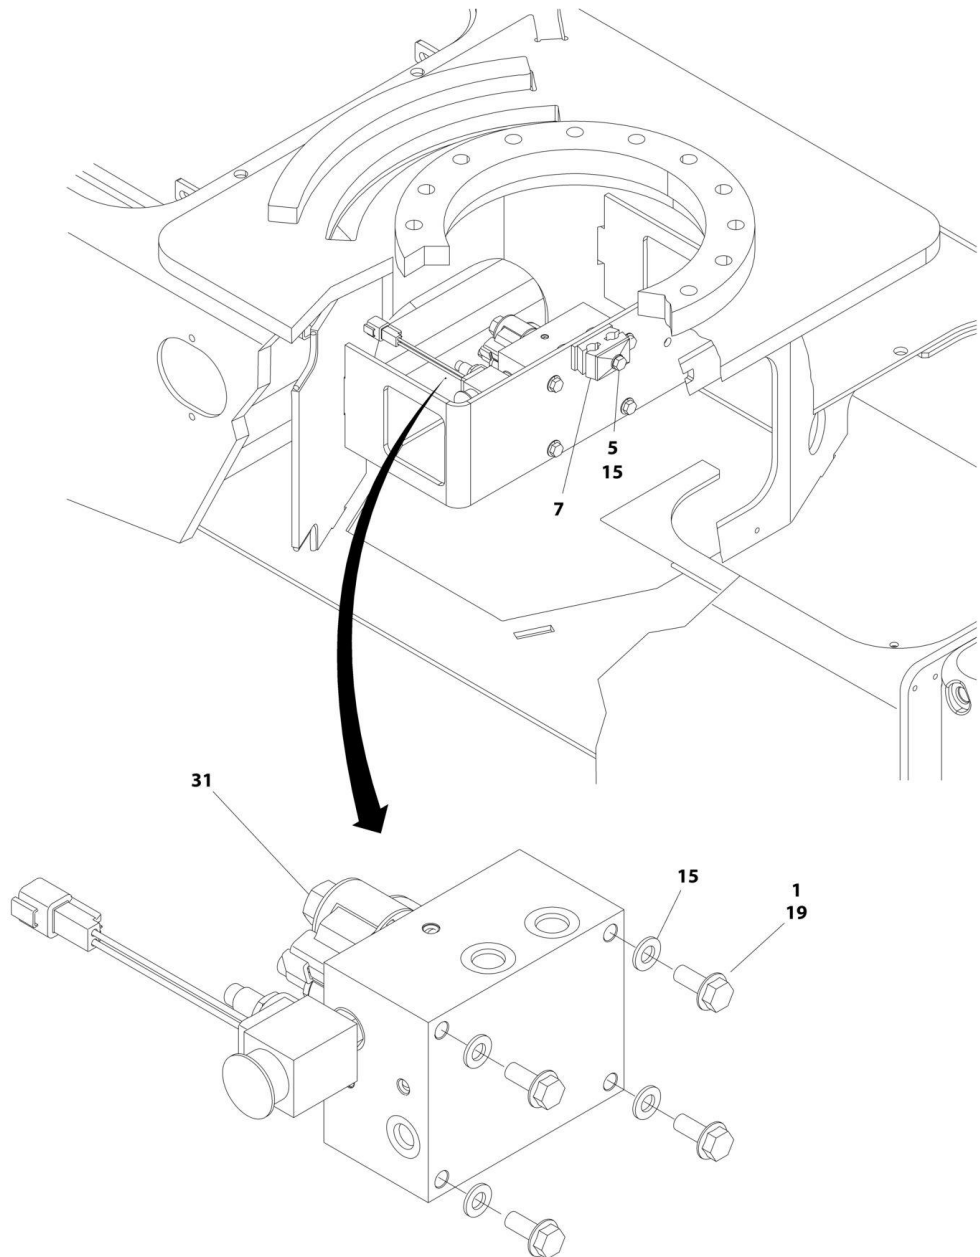

ART_1001167238_1OF3


SECTION 1 - FRAME

FIGURE 1-3. CONTROL VALVES INSTALLATION - FRAME

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001167238	Ref	CONTROL VALVES INSTALLATION - FRAME	I
1	0100011	AR	Compound, Locking	
5	0700815	1	Bolt M8 x 35	
7	1320159	1	Clamp	
15	4811900	5	Washer M8	
19	5250810	14	Bolt M8 x 20	
31	1001165144	1	Oscillating Axle Valve Assembly (See Separate Breakdown in this Section)	

SECTION 1 - FRAME

FIGURE 1-4. OSCILLATING AXLE VALVE ASSEMBLY

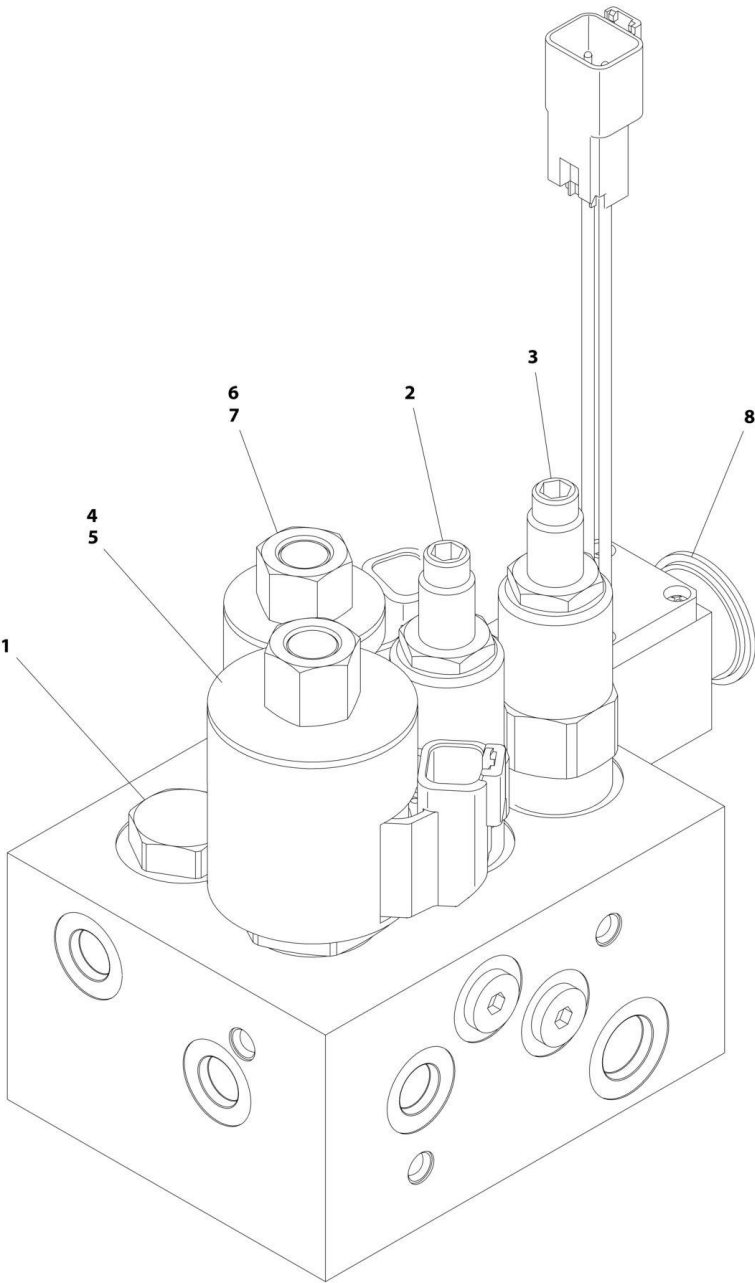


ART_1001165144

FIGURE 1-4. OSCILLATING AXLE VALVE ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001165144	Ref	OSCILLATING AXLE VALVE ASSEMBLY	D
1	4641129	1	Cartridge, Check Valve	
1	7012540	1	Seal Kit - 4641129 Valve	
2	70004787	1	Cartridge, Valve	
2	7021653	1	Seal Kit - 70004787 Valve	
3	70004788	1	Cartridge, Relief Valve	
3	7012998	1	Seal Kit - 70004788 Valve	
4	7017455	1	Cartridge, Valve Less Coil (Primary Axle Release)	
4	7017463	1	Seal Kit - 7017455 Valve	
5	70050516	1	Coil	
6	7017408	1	Cartridge, Valve Less Coil (Secondary Axle Release)	
6	7012907	1	Seal Kit - 7017408 Valve	
7	70002963	1	Coil	
8	70004789	1	Switch, Pressure	

SECTION 1 - FRAME

FIGURE 1-5. DRIVE INSTALLATION

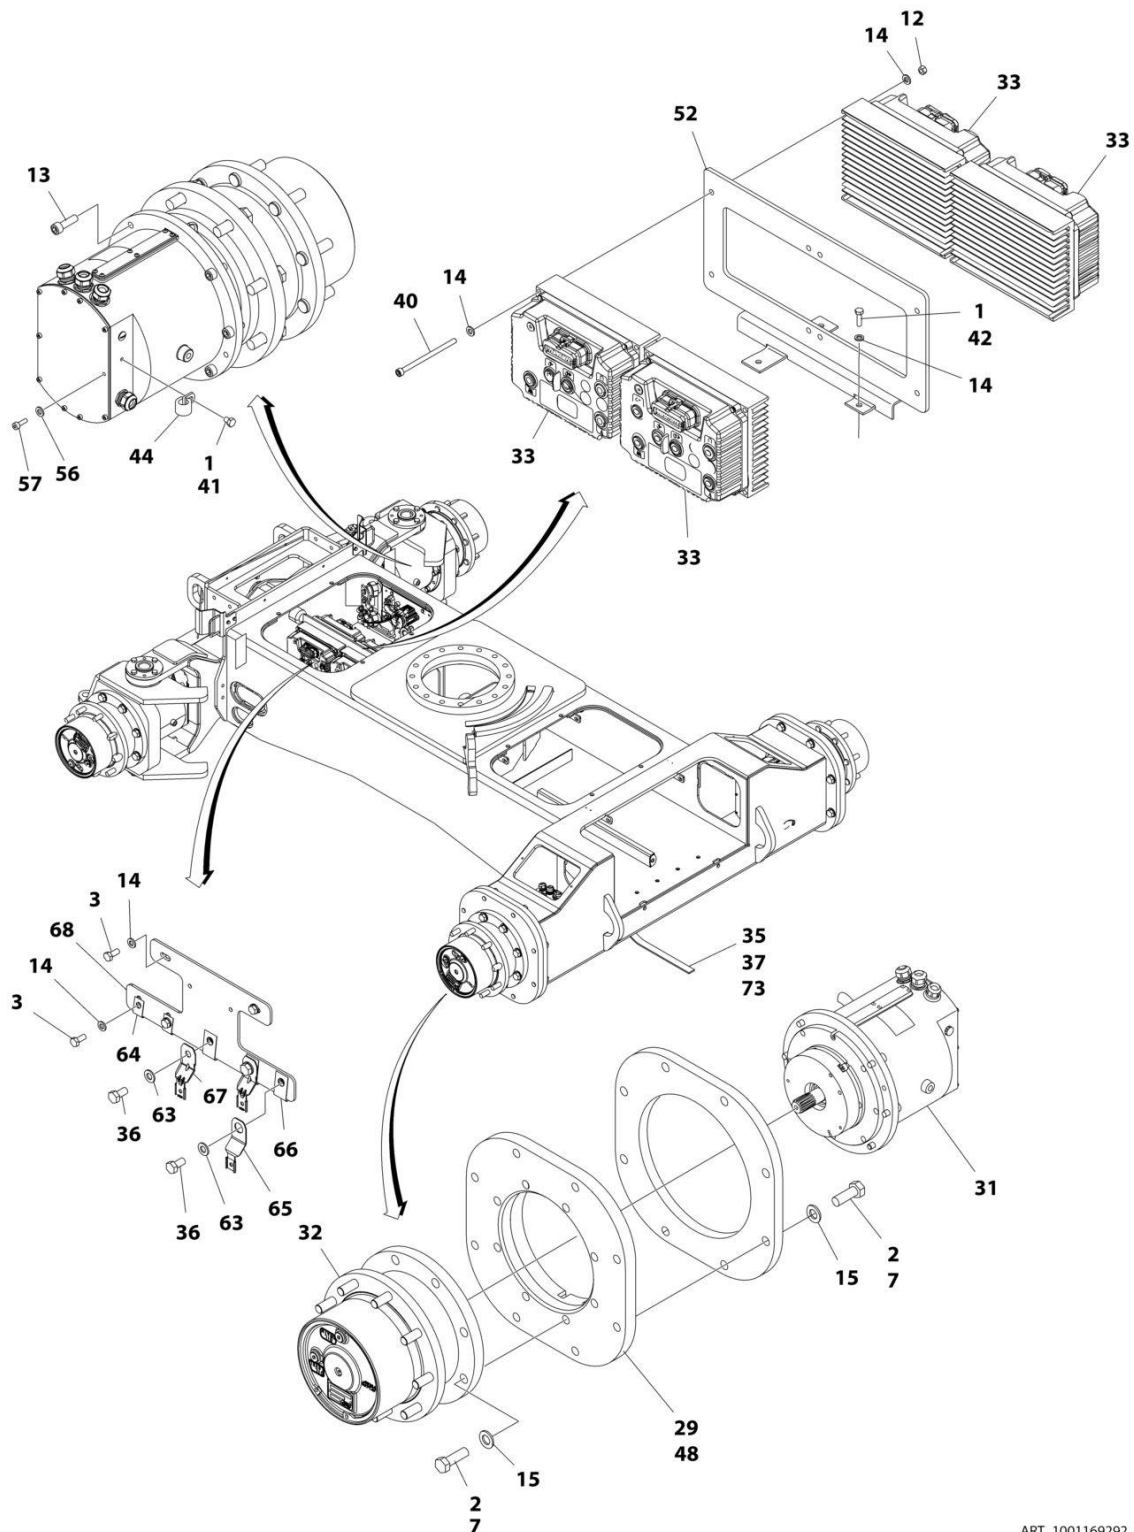


ART_1001169292_1OF2

FIGURE 1-5. DRIVE INSTALLATION

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001169292	Ref	DRIVE INSTALLATION	S
1	0100011	AR	Compound, Locking	
2	0100019	AR	Compound, Locking	
3	0760607	2	Bolt M6 x 14	
7	0771618	48	Bolt M16 x 50	
12	3290601	8	Nut M6	
13	4032009	24	Capscrew M10 x 25	
14	4811700	30	Washer M6	
15	5241600	48	Washer M16	
29	1001168400	2	Flange	
31	1001169683	4	Drive Motor Assembly (See Separate Breakdown in this Section)	
32	1001242519	4	Drive Hub Assembly (See Separate Breakdown in this Section)	
33	1001170140	4	Module, Drive	
35	4240084	1	Strap, Anti-Static	
36	0760808	AR	Bolt M8 x 16	
37	4811902	1	Washer M8	
40	5271723	8	Capscrew M6 x 100	
41	0760605	4	Bolt M6 X 10	
42	0760610	4	Bolt M6 x 20	
44	1320041	2	Clamp	
48	3020039	AR	Lubricant	
52	1001179948	1	Plate, Mounting	
56	4811400	1	Washer M4	
57	4031507	1	Capscrew M4 x 16	
63	4811900	5	Washer M8	
64	1001130220	6	Nut, Tinnerman M6	
65	1001141581	1	Mount, Connector	
66	1001149160	3	Nut, Tinnerman M8	
67	1001155743	2	Holder	
68	1001197294	1	Plate	
73	4191707	1	Screw M6 x 16	

SECTION 1 - FRAME

FIGURE 1-6. DRIVE MOTOR ASSEMBLY

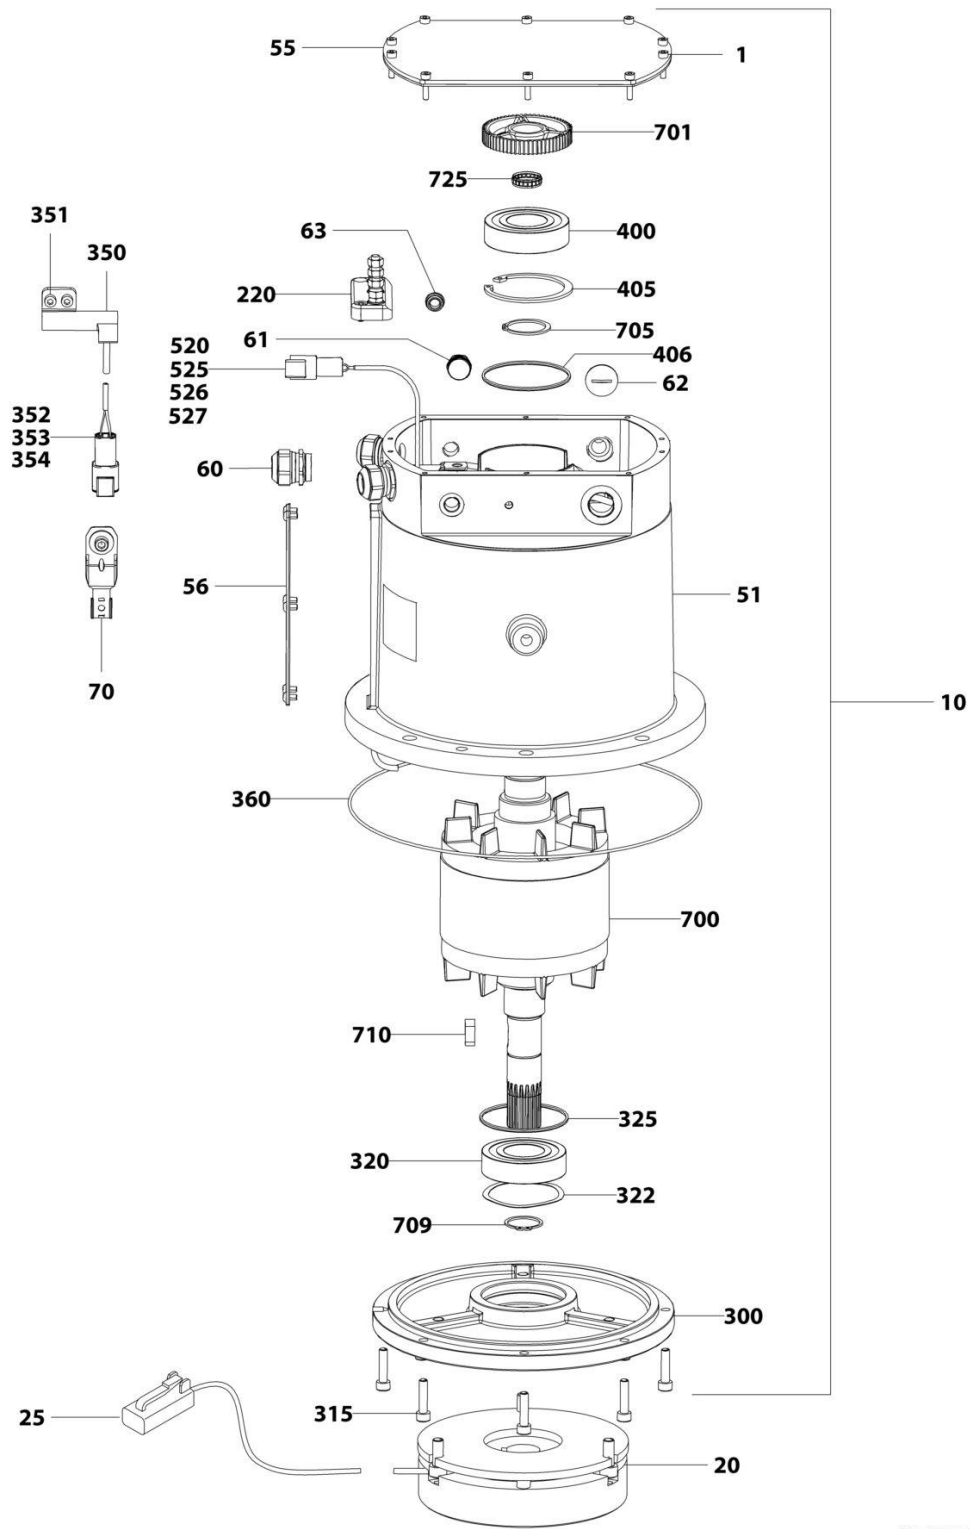


ART_1001169683

FIGURE 1-6. DRIVE MOTOR ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001169683	Ref	DRIVE MOTOR ASSEMBLY	H
1	4031507	10	Capscrew M4 x 16	
10	70004797	1	Motor, Replacement without Brake (Includes Items 51-63, 220-325 & 360-725)	
20	70004798	1	Brake Assembly	
25	4461290	1	Plug, Male - 2 Position	
25	4460516	1	Pin, Male	
51	See Note	1	Stator (Note: Not Available - Use p/n 70004797)	
55	70004799	1	Cover, End	
56	70004800	1	Cover, Access	
60	70004801	4	Connector, Strain Relief	
61	70004802	1	Plug, Pressure	
62	70004803	1	Plug	
63	70004804	1	Plug	
70	70004805	3	Clip, Mounting	
220	70004806	1	Board, Terminal	
300	70004807	1	Cap, End	
315	70004808	6	Capscrew M6 x 25	
320	70004809	1	Bearing, Ball	
322	70004810	1	Washer, Wavy	
325	70004811	1	O-Ring	
350	70004812	1	Sensor, Speed	
351	70004813	2	Capscrew M5 x 16	
352	4460516	4	Pin, Male	
353	See Note	1	Lock, Wedge (Note: Include in Item 354 - Use p/n 4461076)	
354	4461076	1	Receptacle, Female - 4 Position	
360	70004814	1	O-Ring	
400	70004809	1	Bearing, Ball	
405	70004815	1	Circle-Clip	
406	70004811	1	O-Ring	
520	70004816	1	Sensor, Temperature	
525	4460516	1	Pin, Male	
526	See Note	1	Lock, Wedge (Note: Included with Item 527 - Use p/n 70004827)	
527	70004827	1	Receptacle, Female - 2 Position	
700	70004817	1	Armature	
701	70004818	1	Wheel, Sensor	
705	70004819	1	Circle-Clip	
709	70004820	1	Circle-Clip	
710	70004821	1	Key	
725	70004822	1	Ring, Tolerance	

SECTION 1 - FRAME

FIGURE 1-7. DRIVE HUB ASSEMBLY

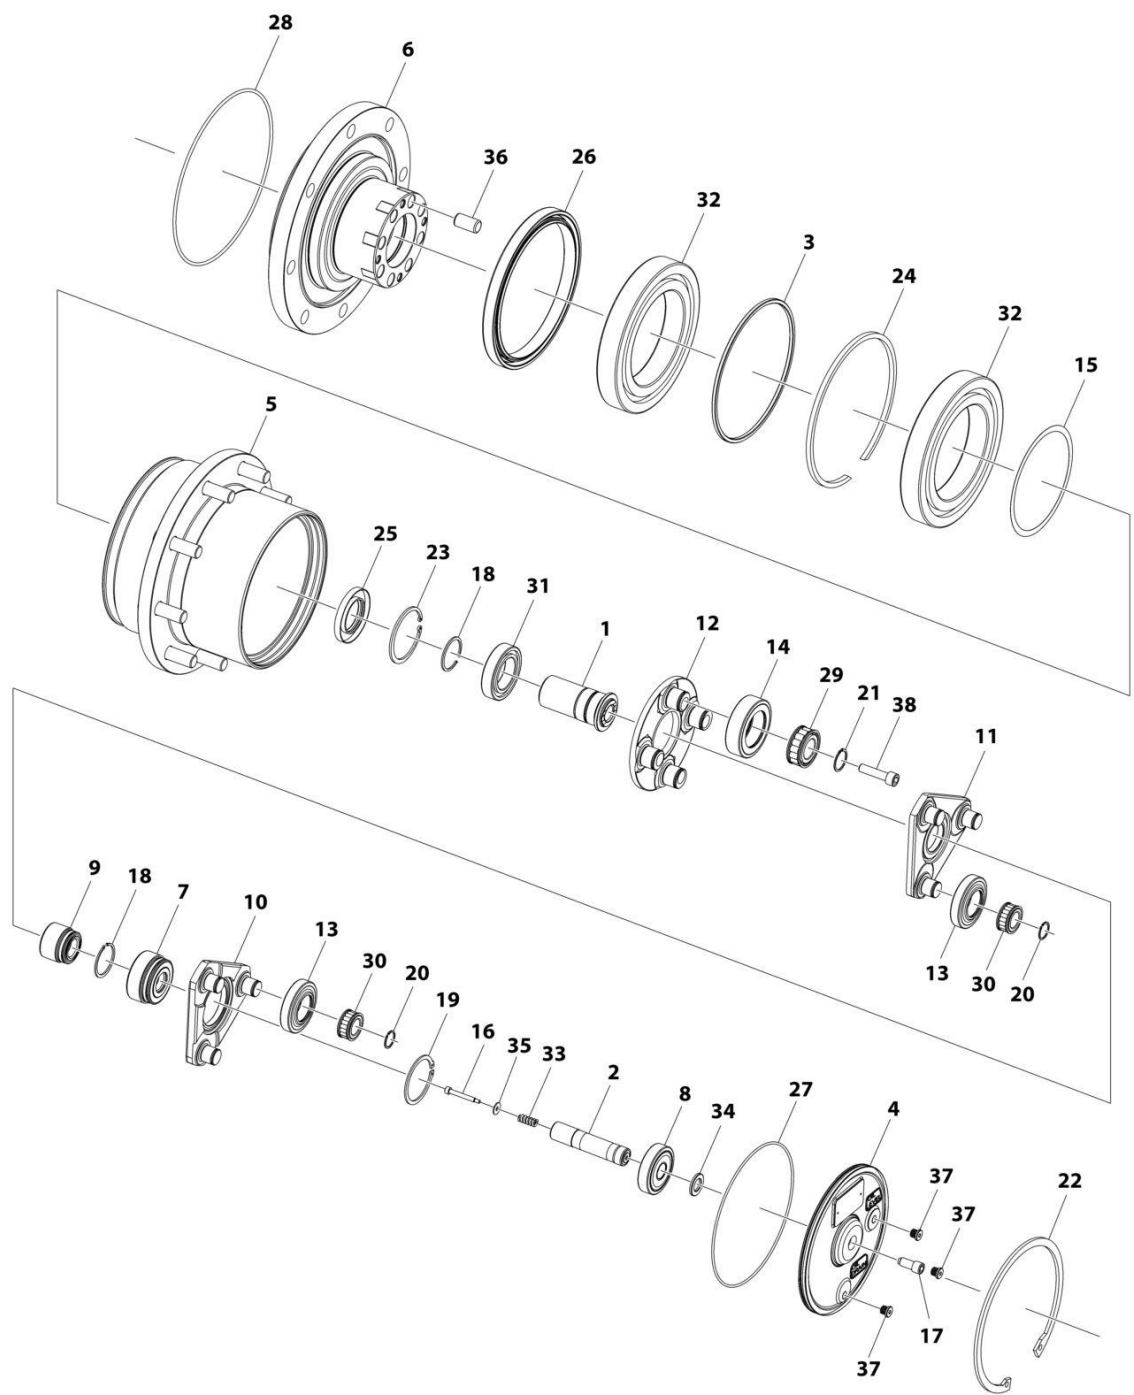


ART_1001242519

FIGURE 1-7. DRIVE HUB ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001242519	Ref	HUB ASSEMBLY	A
1	70005063	1	Shaft, Input	
2	70005062	1	Shaft, Internal	
3	70007221	1	Spacer	
4	70007220	1	Cover	
5	See Note	NSS	Body, Wheel	
6	70007219	1	Spindle	
7	70007218	1	Sun Gear (Intermediate Stage)	
8	70007217	1	Sun Gear (Fast Stage)	
9	70007216	1	Sun Gear (Power Stage)	
10	70007215	1	Carrier (Fast Stage)	
11	70007214	1	Carrier (Intermediate Stage)	
12	70007213	1	Carrier (Power Stage)	
13	70007212	6	Planet Gear (Fast Stage)	
14	70007211	4	Planet Gear (Power Stage)	
15	70005047	1	Shim	
16	70005045	1	Screw M4	
17	70005044	1	Screw M10 x 1	
18	70005043	2	Ring, Retaining	
19	70005042	1	Ring, Retaining	
20	70005041	6	Ring, Retaining	
21	70005040	4	Ring, Retaining	
22	70005038	1	Ring, Retaining	
23	70005037	1	Ring, Retaining	
24	70007210	1	Ring, Retaining	
25	70005035	1	Seal	
26	70007209	1	Seal	
27	70005032	1	O-Ring	
28	70005031	1	O-Ring	
29	70005029	4	Bearing, Roller	
30	70005028	6	Bearing, Roller	
31	70005027	1	Bearing, Ball	
32	70007208	2	Bearing, Ball	
33	70005025	1	Spring	
34	70005024	1	Washer	
35	70005022	1	Washer M5	
36	70005560	8	Pin	
37	70005020	3	Plug M10	
38	70005019	4	Capscrew M10 x 40	

SECTION 1 - FRAME

FIGURE 1-8. TIRE AND WHEEL INSTALLATION - 7X18 SOLID

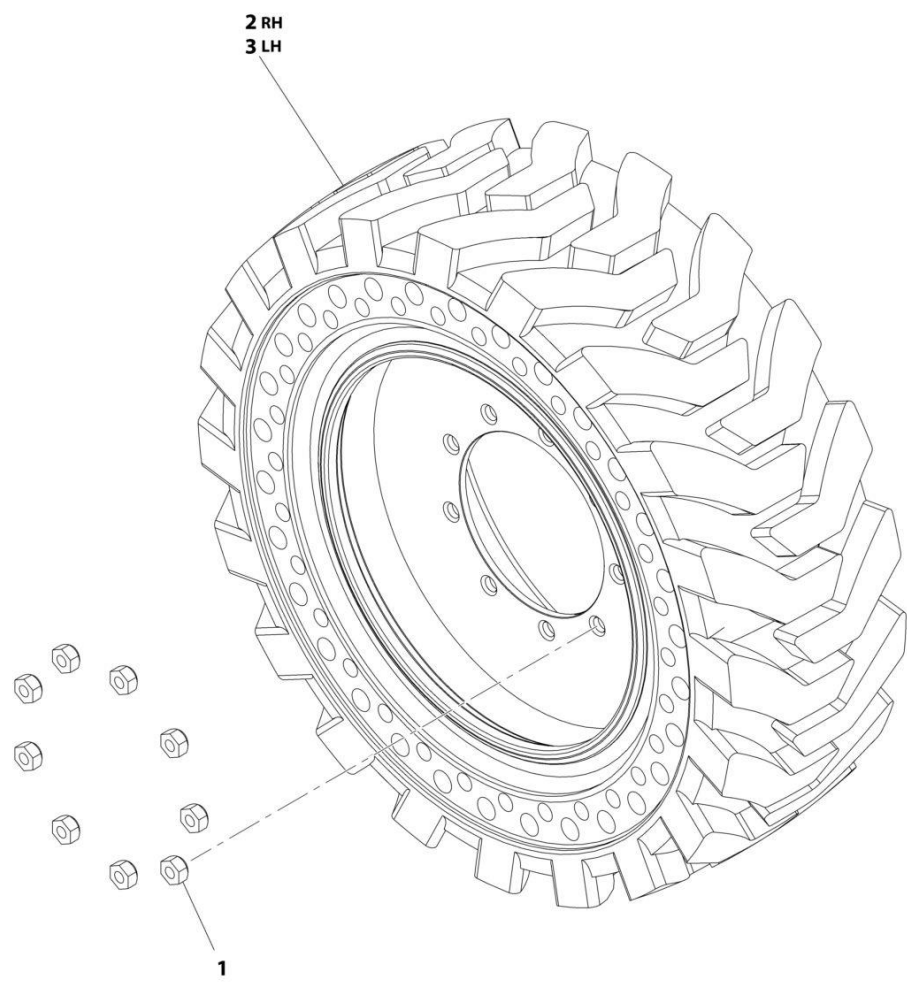

ART_100118641


SECTION 1 - FRAME

FIGURE 1-8. TIRE AND WHEEL INSTALLATION - 7X18 SOLID

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001118641	Ref	TIRE AND WHEEL INSTALLATION - 7X18 SOLID	C
		Ref	Note: Due to critical stability weights, only replace tire and wheel assemblies with like components.	
1	3300106	36	Lugnut (9 per Wheel)	
2	1001118649	2	Tire and Wheel Assembly - 7 x 18 Solid Right Side (Note: No Serviceable Parts - Replace Complete Sets per Axle)	
3	1001121678	2	Tire and Wheel Assembly - 7 x 18 Solid Left Side (Note: No Serviceable Parts - Replace Complete Sets per Axle)	

SECTION 1 - FRAME

FIGURE 1-9. TIRE AND WHEEL INSTALLATION - 7X18 SOLID NON-MARKING

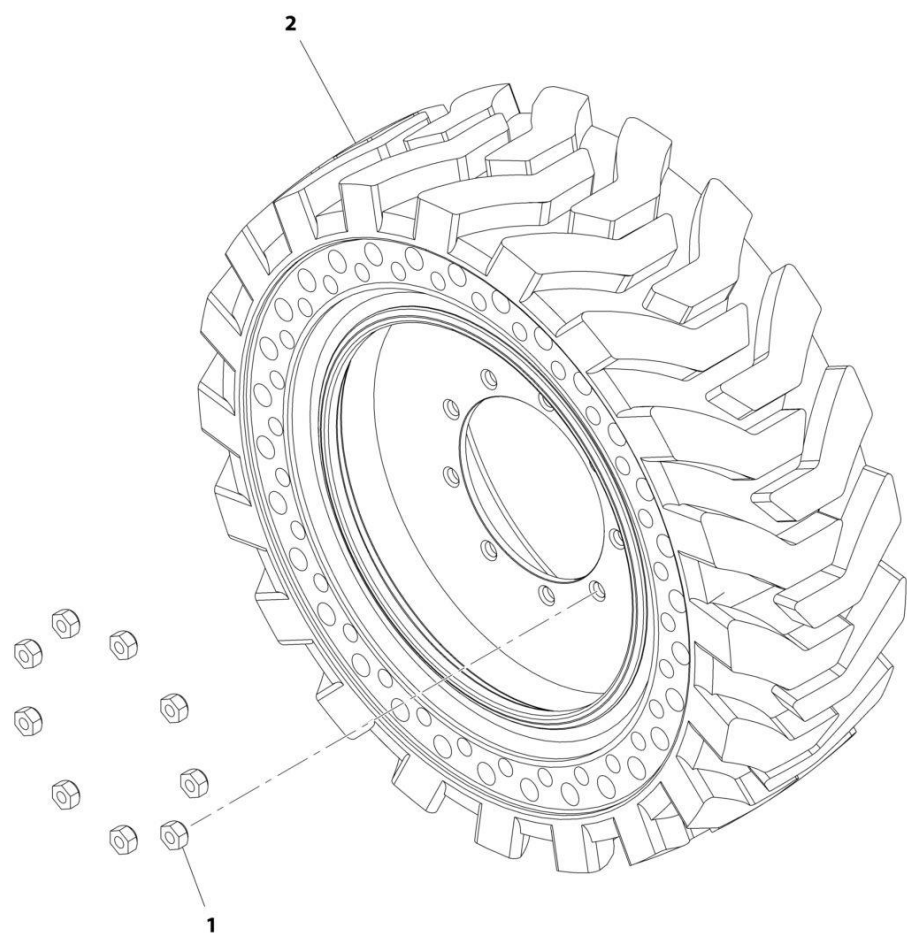

ART_1001118644


SECTION 1 - FRAME

FIGURE 1-9. TIRE AND WHEEL INSTALLATION - 7X18 SOLID NON-MARKING

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001118644	Ref	TIRE AND WHEEL INSTALLATION - 7X18 SOLID NON-MARKING	C
		Ref	Note: Due to critical stability weights, only replace tire and wheel assemblies with like components.	
1	3300106	36	Lugnut (9 per Wheel)	
2	1001118654	2	Tire and Wheel Assembly - 7 x 18 Solid (RH) (Note: No Serviceable Parts - Replace Complete Sets per Axle)	
2	1001121672	2	Tire and Wheel Assembly - 7 x 18 Solid (LH) (Note: No Serviceable Parts - Replace Complete Sets per Axle)	

SECTION 1 - FRAME

FIGURE 1-10. TIRE AND WHEEL INSTALLATION - 9X20 FOAM-FILLED

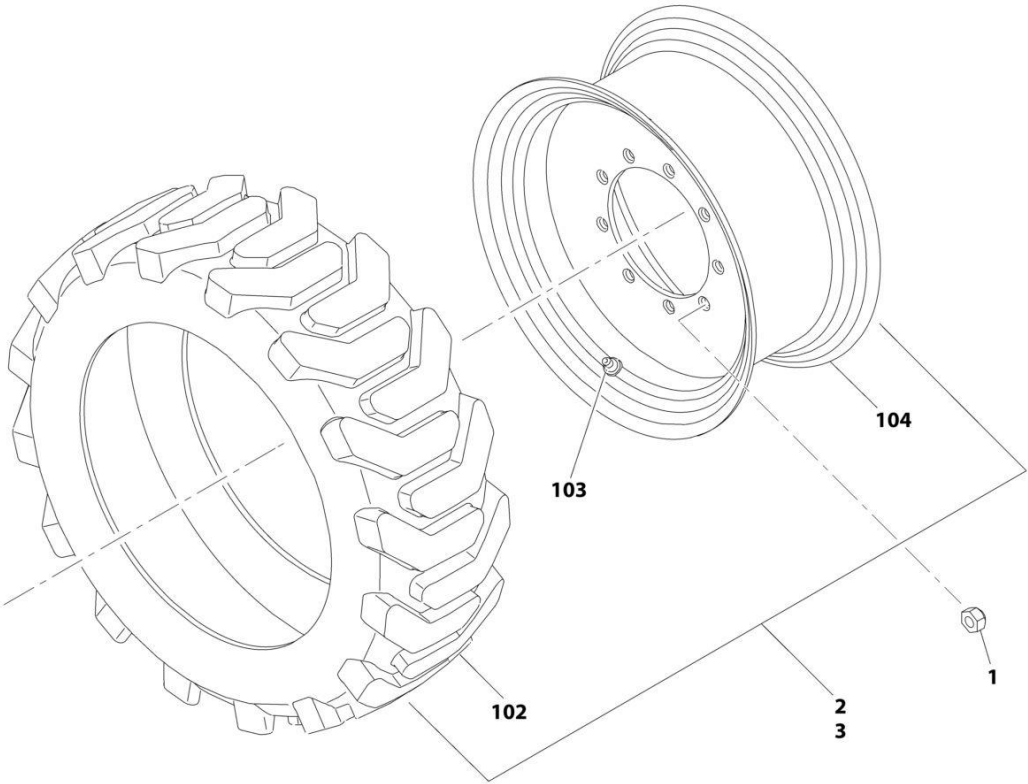

ART_1001115773


SECTION 1 - FRAME

FIGURE 1-10. TIRE AND WHEEL INSTALLATION - 9X20 FOAM-FILLED

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001115773	Ref	TIRE AND WHEEL INSTALLATION - 9X20 FOAM-FILLED	B
		Ref	Note: Due to critical stability weights, only replace tire and wheel assemblies with like components.	
1	3300106	36	Lugnut (9 per Wheel)	
2	1001117131	2	Tire and Wheel Assembly - 9 x 20 Foam-Filled Left Side	E
3	1001117132	2	Tire and Wheel Assembly - 9 x 20 Foam-Filled Right Side	D
		Ref	Note: Assemblies may require ballast/foam filling to manufacture's specifications prior to installing on a machine. Refer to Operation and Safety or Service and Maintenance Manuals. Purchase individual tire and/or rim only if able to foam fill tire and wheel assembly, otherwise, purchase complete assembly.	
102	4520605	4	Tire - IN265/50D20	
103	4640113	4	Valve, Air	
104	1001117129	4	Rim for 20 x 9 (Use with IN265/50D20 Tires)	

SECTION 1 - FRAME

FIGURE 1-11. TIRE AND WHEEL INSTALLATION - 9X20 FOAM-FILLED NON-MARKING

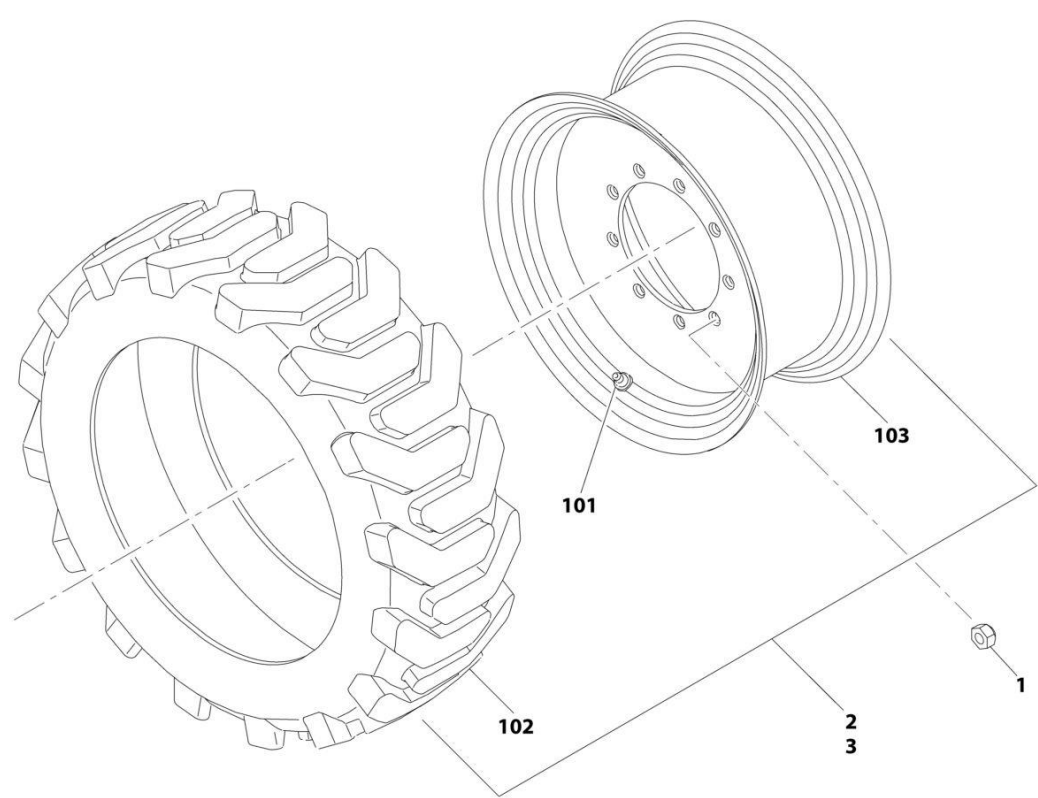

ART_1001118642


SECTION 1 - FRAME

FIGURE 1-11. TIRE AND WHEEL INSTALLATION - 9X20 FOAM-FILLED NON-MARKING

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001118642	Ref	TIRE AND WHEEL INSTALLATION - 9X20 FOAM-FILLED NON-MARKING	B
		Ref	Note: Due to critical stability weights, only replace tire and wheel assemblies with like components.	
1	3300106	36	Lugnut (9 per Wheel)	
2	1001118650	2	Tire and Wheel Assembly - 9 x 20 Foam-Filled Non-Marking Right Side	D
3	1001118651	2	Tire and Wheel Assembly - 9 x 20 Foam-Filled Non-Marking Left Side	D
		Ref	Note: Assemblies may require ballast/foam filling to manufacturer's specifications prior to installing on a machine. Refer to Operation and Safety or Service and Maintenance Manuals. Purchase individual tire and/or rim only if able to foam fill tire and wheel assembly, otherwise, purchase complete assembly.	
101	4640113	4	Valve, Air	
102	1001118660	4	Tire - IN265/50D20 Non-Marking	
103	1001117129	4	Rim for 20 x 9 (Use with IN265/50D20 Tires)	

SECTION 1 - FRAME

FIGURE 1-12. BATTERIES INSTALLATION

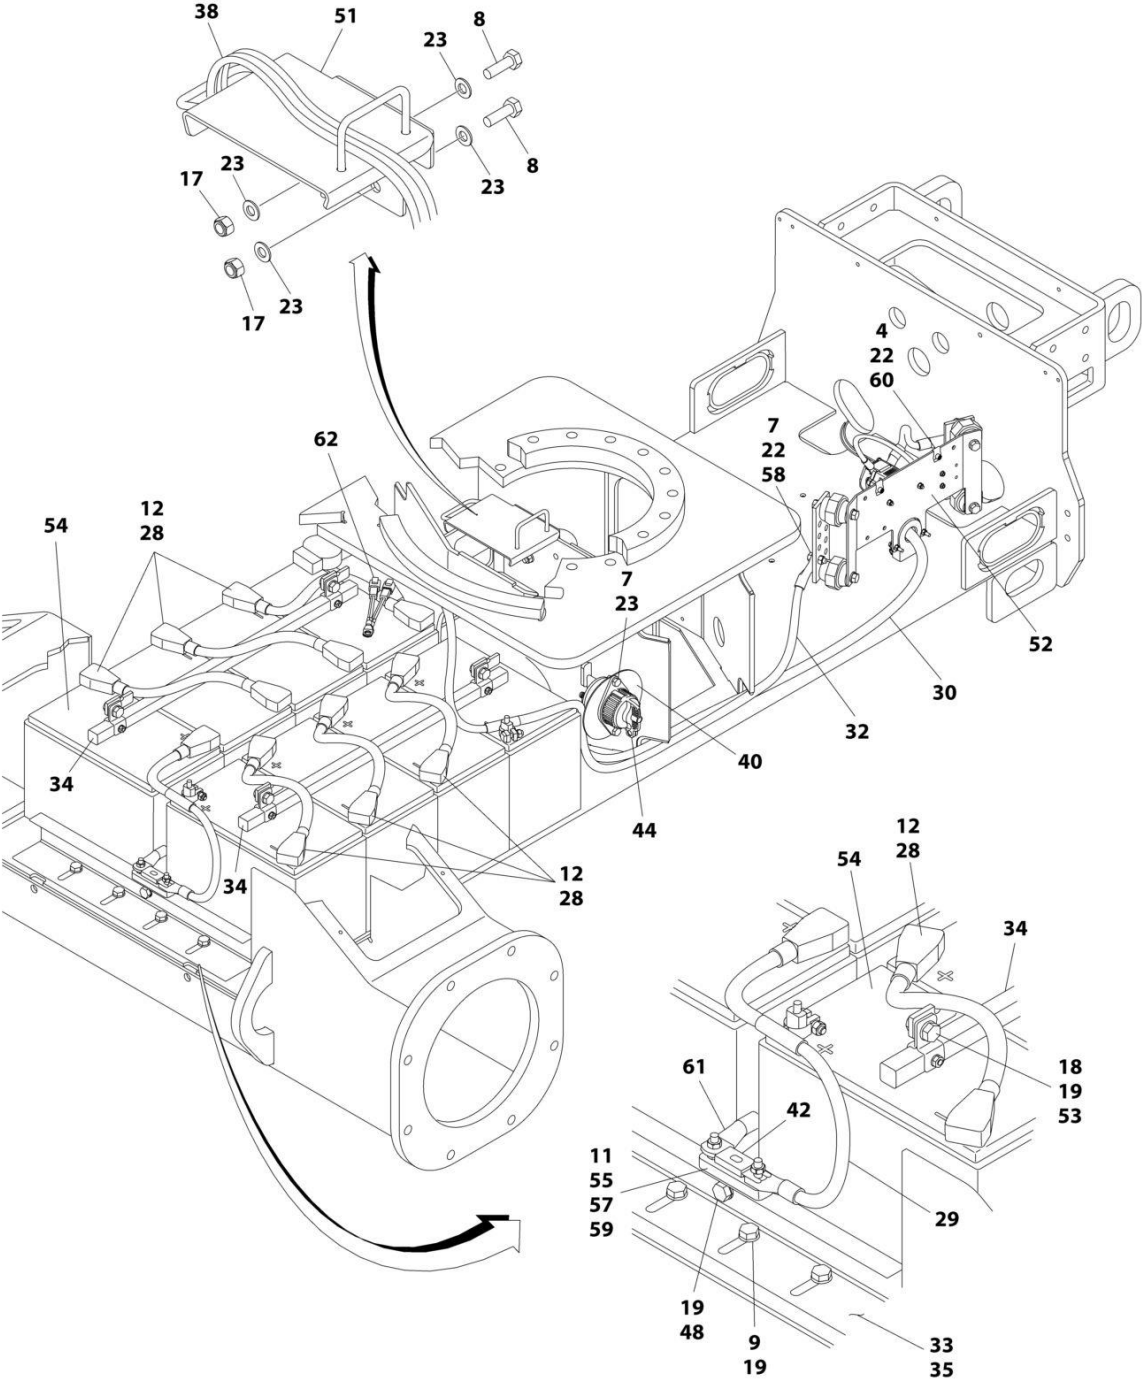


ART_1001162045

FIGURE 1-12. BATTERIES INSTALLATION

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001162045	Ref	BATTERIES INSTALLATION	J
4	0700610	2	Bolt M6 x 20	
7	0760808	4	Bolt M8 x 16	
8	0760812	2	Bolt M8 x 25	
9	0761010	4	Bolt M10 x 20	
11	2400044	1	Block, Fuse Mounting	
12	0100051	AR	Grease, Terminal	
17	3290805	2	Nut M8	
18	3291005	4	Nut M10	
19	4812000	13	Washer M10	
22	4811700	2	Washer M6	
23	4811900	6	Washer M8	
28	1001161935	6	Cable, Battery (Battery – to Battery +)	
29	1001161936	1	Cable, Battery (Battery + to Fuse)	
30	1001161937	1	Cable, Battery (Fuse to Contactor)	
32	1001161947	1	Cable, Battery (Battery – to Bussbar)	
33	1001162046	1	Support, Stop	
34	1001162047	2	Holddown Assembly - Battery	
34	1001162048	2	Rod, Holddown (1 per Assembly)	
34	1001162049	4	Bracket, Holddown (2 per Assembly)	
35	1001162050	2	Liner, Tray	
38	1001167538	1	Harness, Battery Charger (See Separate Breakdown in ELECTRICAL Section)	
40	1001170102	1	Plate, Disconnect Cover	
42	1001170365	1	Fuse, 400 Amp	
44	1001170483	1	Switch, Battery Disconnect	
48	0761020	1	Bolt M10 x 60	
51	1001171777	1	Mount, Cable Routing	
52	1001184133	1	Electrical Plate Assembly (See Separate Breakdown in this Section)	
53	0761012	4	Bolt M10 x 25	
54	0400209	8	Battery	
55	3290401	2	Nut M4	
57	4811400	2	Washer M4	
58	4831900	2	Washer M8	
59	8310612	2	Screw M4 x 20	
60	1001130220	2	Nut, Tinnerman M6	
61	1001184022	1	Cable, Battery (Fuse to Disconnect)	
62	1001225131	2	Harness, Temp Sensor	
62	1001102771	1	Sensor, Temperature	
62	4460897	1	Connector - 2 Position	
62	4460464	2	Pin, Male	

SECTION 1 - FRAME

FIGURE 1-13. ELECTRICAL PLATE ASSEMBLY

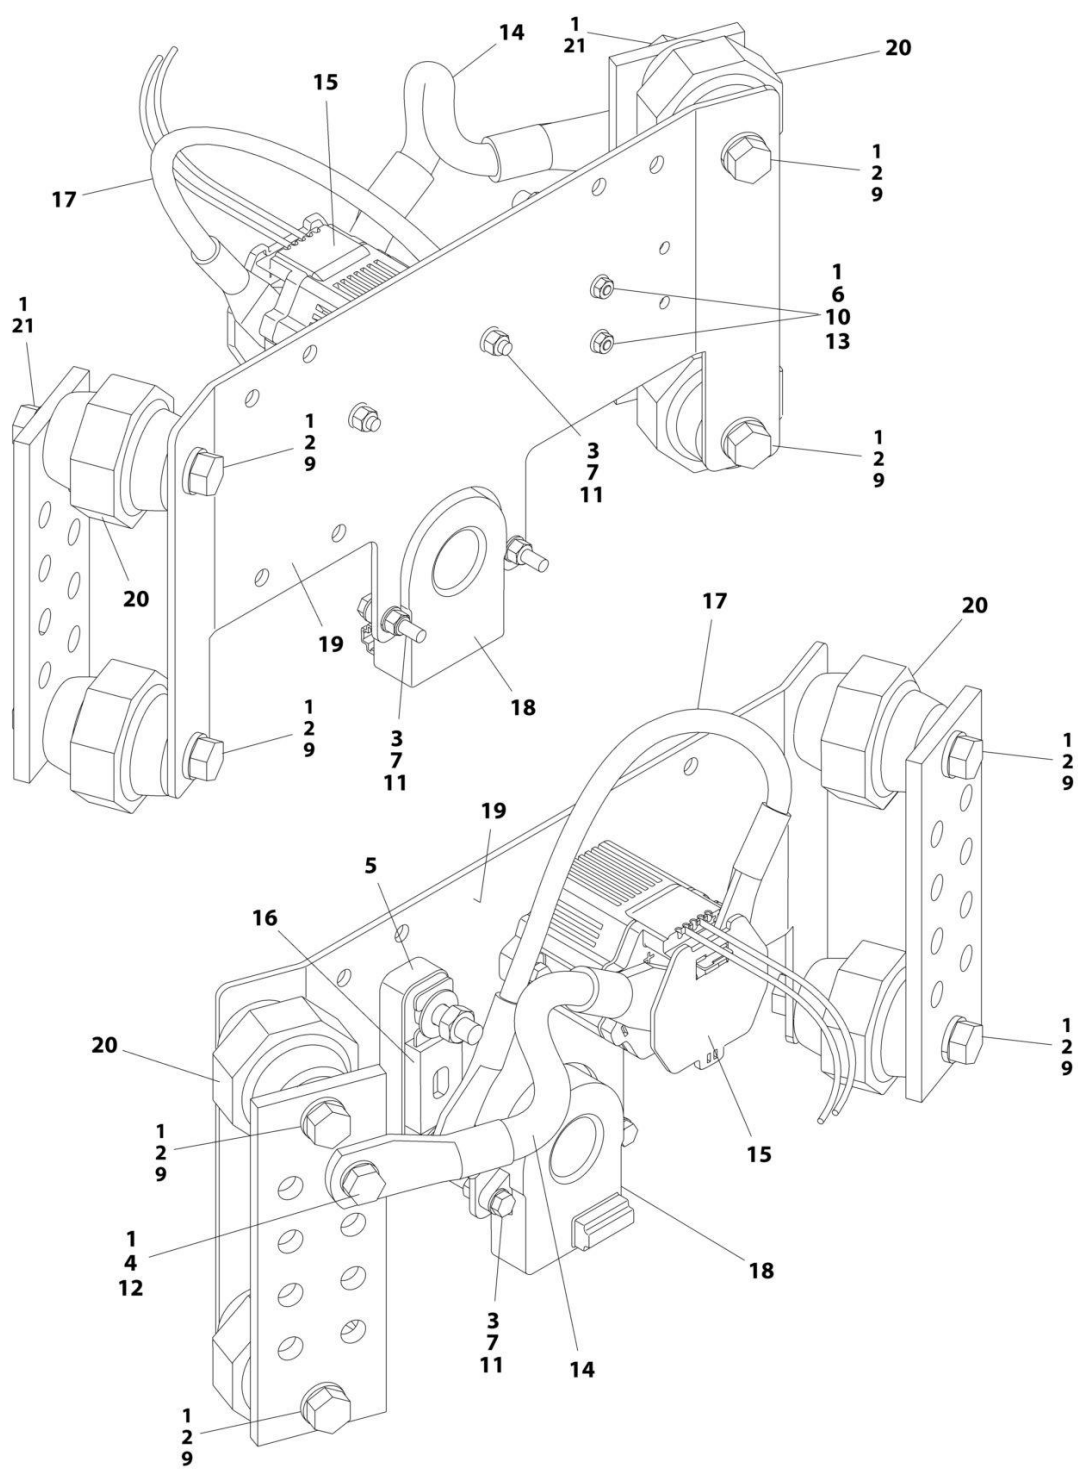

ART_1001184133


SECTION 1 - FRAME

FIGURE 1-13. ELECTRICAL PLATE ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001184133	Ref	ELECTRICAL PLATE ASSEMBLY	F
1	0100011	AR	Compound, Locking	
2	0641606	8	Bolt 3/8-16 x 3/4	
3	0760512	4	Bolt M5 x 25	
4	0760808	1	Bolt M8 x 16	
5	2400044	1	Block, Fuse Mounting	
6	3290401	2	Nut M4	
7	3290505	4	Nut M5	
9	4761600	8	Washer 3/8	
10	4811400	2	Washer M4	
11	4811600	6	Washer M5	
12	4831900	1	Washer M8	
13	8310612	2	Screw M4 x 20	
14	1001161938	1	Cable, Battery (Fuse to Bussbar)	
15	1001170367	1	Contactor	
16	1001170484	1	Fuse 125 Amp	
17	1001170861	1	Cable, Battery (Contactor to Fuse)	
18	1001183548	1	Sensor, Current	
19	1001184135	1	Plate	
20	1001184137	2	Bussbar Assembly	
21	0641608	4	Bolt 3/8-16 x 1	

SECTION 1 - FRAME

FIGURE 1-14. FRAME SHIELDS INSTALLATION

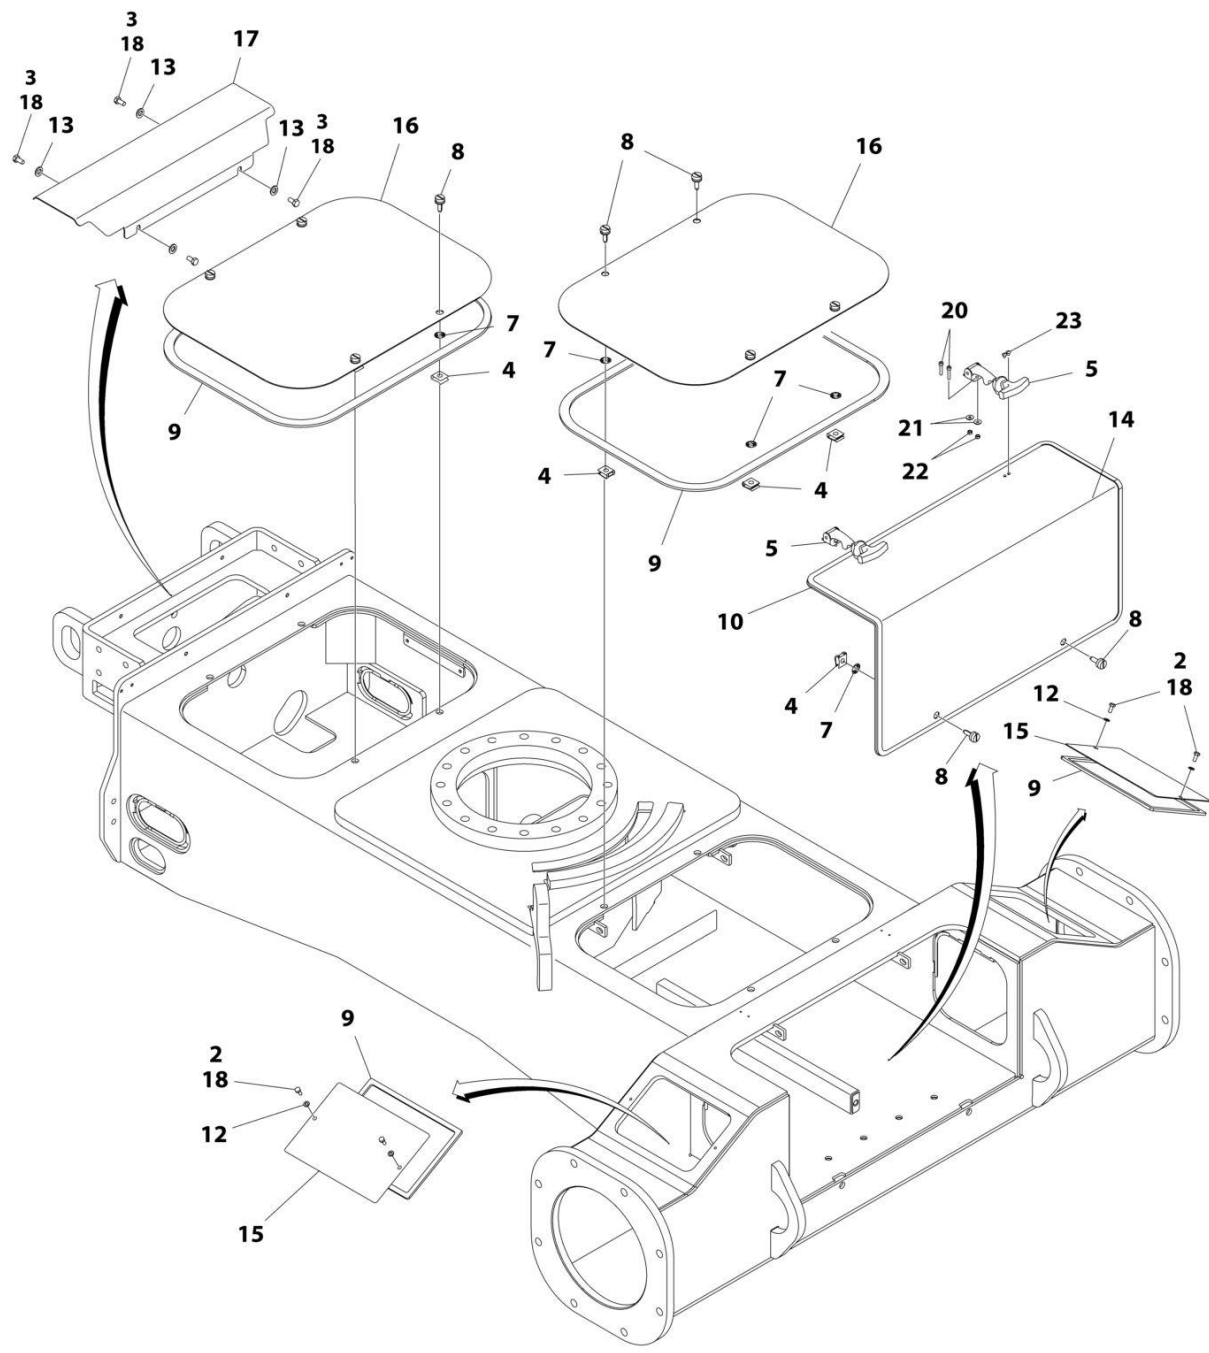

ART_1001161872

SECTION 1 - FRAME


FIGURE 1-14. FRAME SHIELDS INSTALLATION

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001161872	Ref	FRAME SHIELDS INSTALLATION	E
2	0760607	4	Bolt M6 x 14	
3	0760808	4	Bolt M8 x 16	
4	1380138	10	Clip	
5	2940095	2	Latch, Rubber Tee	
7	3760308	10	Retainer	
8	3900174	10	Screw, Thumb	
9	1001113047	18.7 ft /5.7m	Seal	
10	3960447	7.8 ft /2.4m	Seal	
12	4811700	4	Washer M6	
13	4812000	4	Washer M10	
14	1001161873	1	Cover, Rear Axle	
15	1001161874	2	Cover, Rear Motor	
16	1001161876	2	Cover, Battery	
17	1001161878	1	Cover, Front Frame	
18	0100011	AR	Compound, Locking	
20	5271609	4	Capscrew M5 x 25	
21	4811602	4	Washer M5	
22	3290505	4	Nut M5	
23	3820019	4	Rivet	

SECTION 2 - TURNTABLE

SECTION 2 - TURNTABLE

FIGURE 2-1. CONTROL VALVE INSTALLATION - TURNTABLE

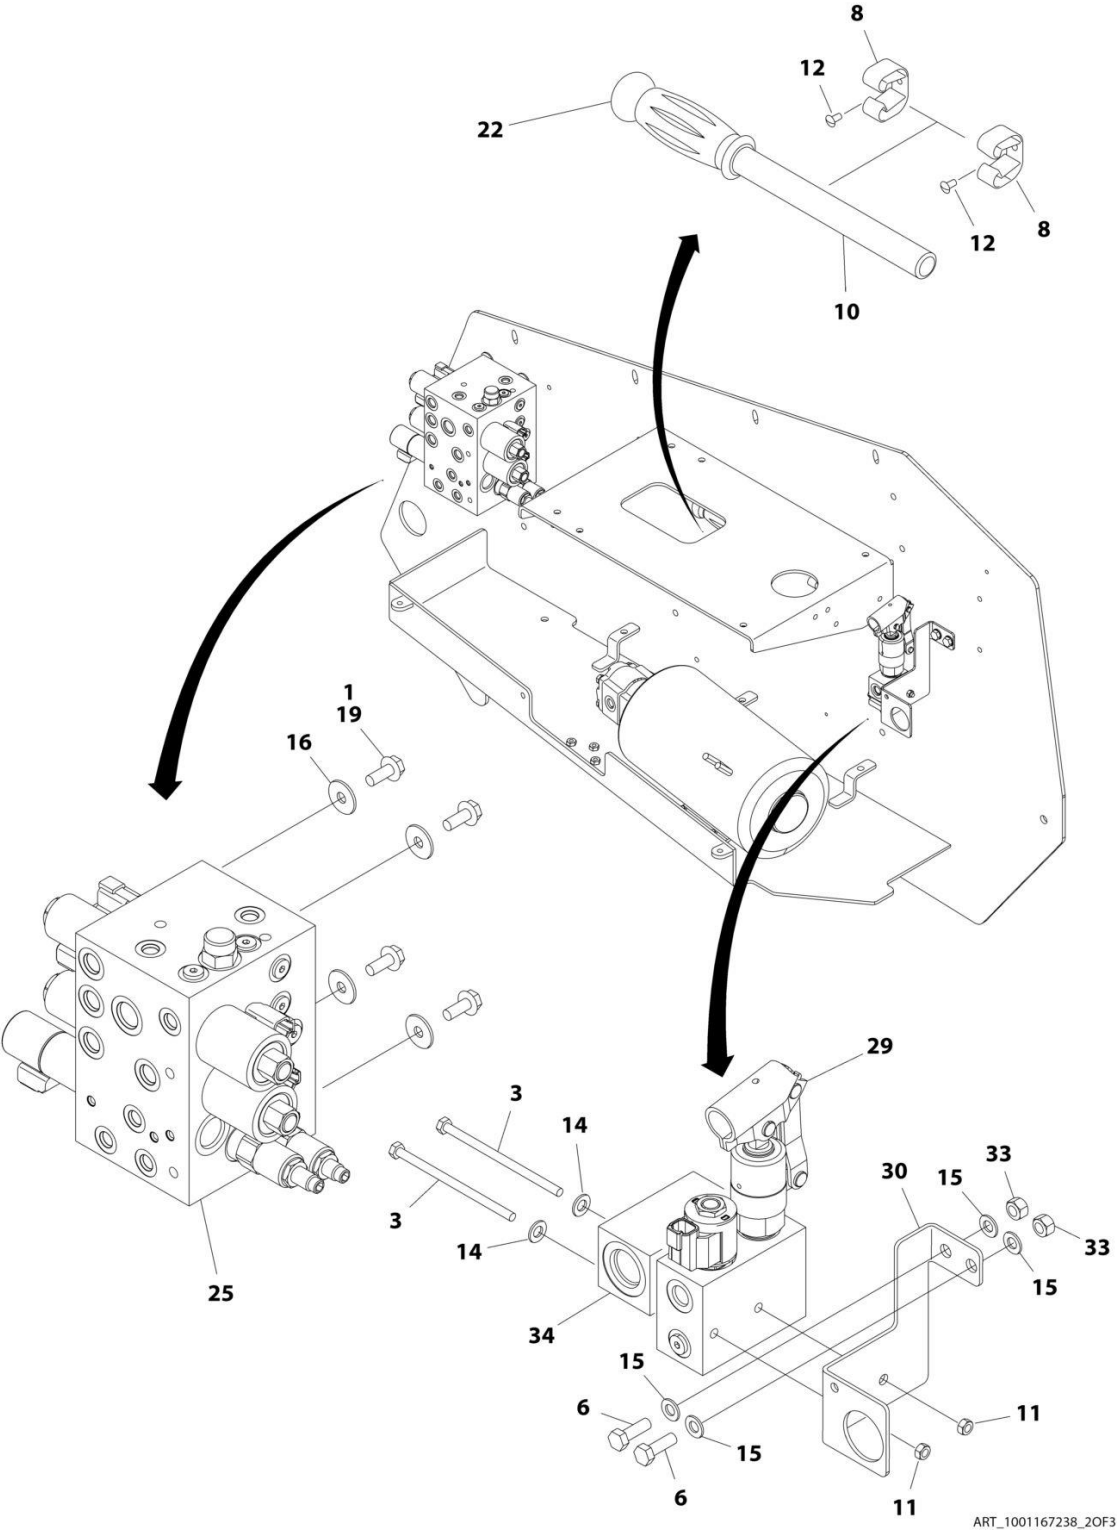


SECTION 2 - TURNTABLE

FIGURE 2-1. CONTROL VALVE INSTALLATION - TURNTABLE

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001167238	Ref	CONTROL VALVES INSTALLATION - TURNTABLE	I
1	0100011	AR	Compound, Locking	
3	0700628	2	Bolt M6 x 110	
6	0760812	2	Bolt M8 x 25	
8	1380136	2	Clip, Gripper	
10	2560122	1	Handle, Pump	
11	3290601	2	Nut M6	
12	3820020	2	Rivet	
14	4811700	2	Washer M6	
15	4811900	5	Washer M8	
16	4811902	4	Washer M8	
19	5250810	14	Bolt M8 x 20	
22	1001114761	1	Grip, Handle	
25	1001116487	1	Main Control Valve Assembly (See Separate Breakdown in this Section)	
29	1001210829	1	Manual Pump Assembly	
29	70005722	1	Cartridge, Hand Pump	
29	7017496	1	Seal Kit - Hand Pump	
29	7017467	1	Cartridge, Solenoid Valve Less Coil	
29	7012967	1	Seal Kit - Cartridge	
29	70002386	1	Coil	
30	1001162614	1	Bracket	
33	3290805	2	Nut M8	
34	1001183406	1	Valve, Junction	

SECTION 2 - TURNTABLE

FIGURE 2-2. MAIN CONTROL VALVE ASSEMBLY

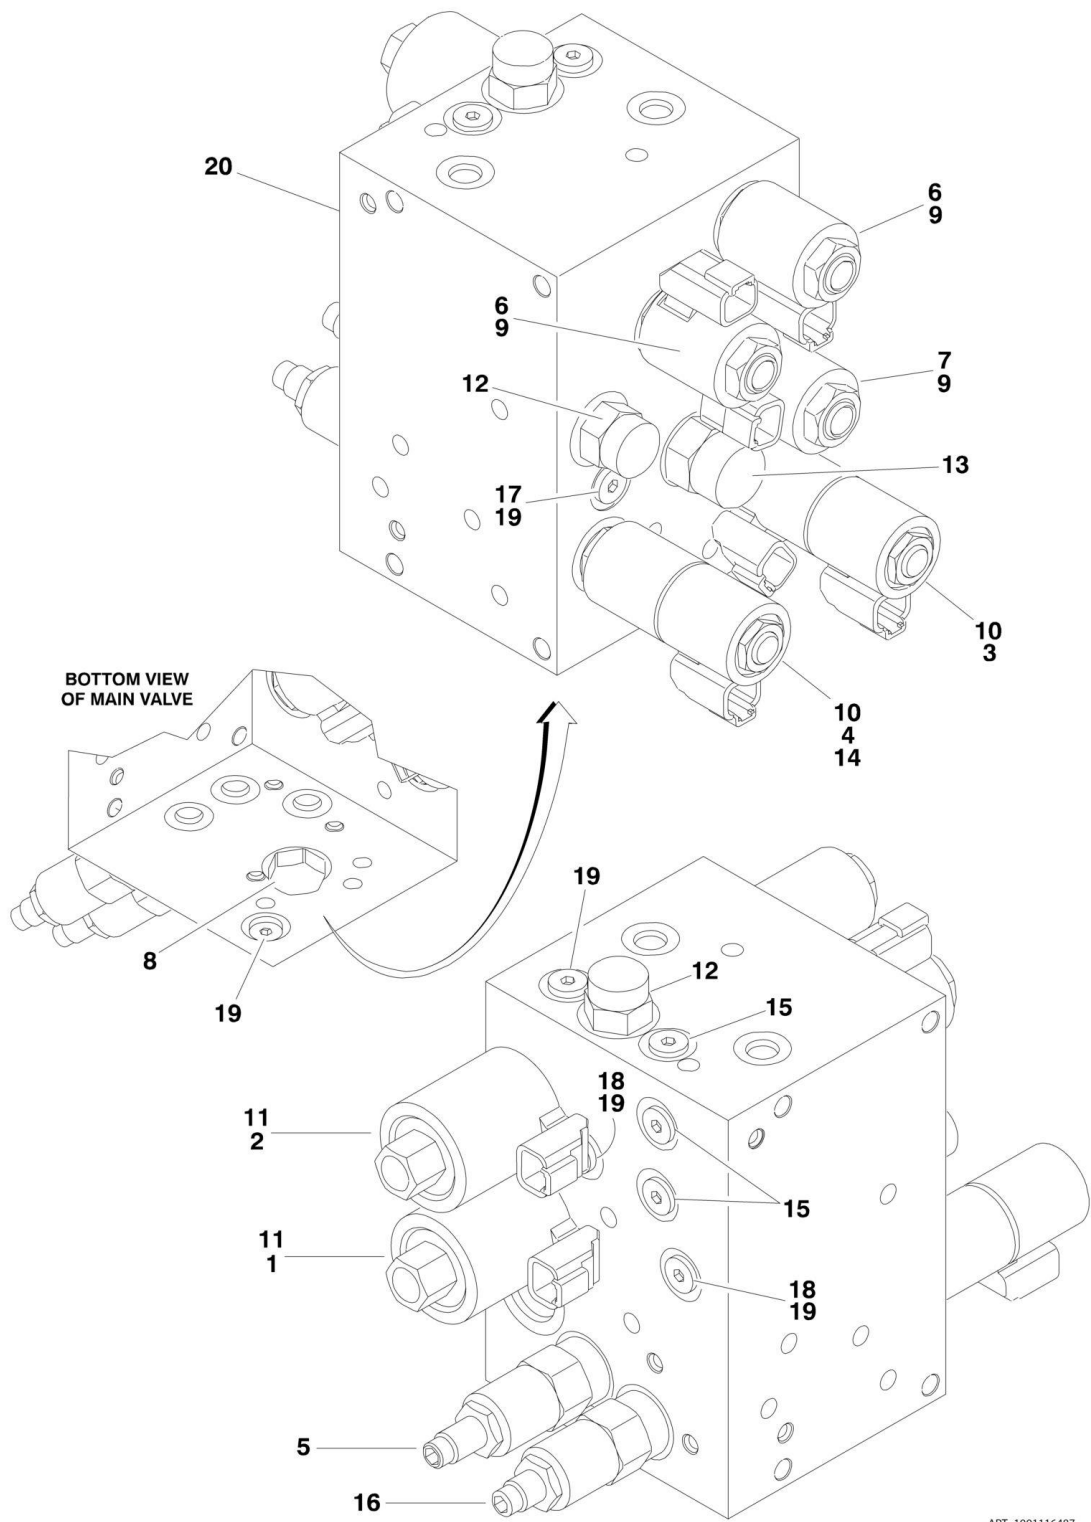


SECTION 2 - TURNTABLE

FIGURE 2-2. MAIN CONTROL VALVE ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001116487	Ref	MAIN VALVE ASSEMBLY	I
1	70002964	1	Cartridge, Solenoid Valve with Relief (without Coil)	
1	7017496	1	Seal Kit - 70002964 Cartridge	
2	70002965	1	Cartridge, Solenoid Valve with Relief (without Coil)	
2	7017496	1	Seal Kit - 70002965 Cartridge	
3	70002966	1	Cartridge, Solenoid Valve (without Coil) (Swing)	
3	70002967	1	Seal Kit - 70002966 Cartridge	
4	70002966	1	Cartridge, Solenoid Valve (without Coil) (Steer)	
4	70002967	1	Seal Kit - 70002966 Cartridge	
5	70002968	1	Cartridge, Relief Valve	
5	7012998	1	Seal Kit - 70002968 Cartridge	
6	70002969	2	Cartridge, Solenoid Valve (without Coil) (Upper and Lower Lift)	
6	7010543	2	Seal Kit - Cartridge	
7	70002970	1	Cartridge, Solenoid Valve (without Coil) (Flow Control)	
7	7010543	1	Seal Kit - 70002970 Cartridge	
8	10837580	1	Cartridge, Shuttle Valve	
8	7010543	1	Seal Kit - 108377580 Cartridge	
9	70002971	3	Coil	
10	70002386	4	Coil	
11	70003788	2	Coil	
12	70002972	2	Cartridge, Pressure Compensator Valve	
12	7010543	2	Seal Kit - 70002972 Cartridge	
13	70002973	1	Cartridge, Pressure Compensator Valve	
13	7010543	1	Seal Kit - 70002973 Cartridge	
14	70002974	1	Disc, Check Valve	
15	70003757	3	Cartridge, Check Valve	
15	70002976	3	Seal Kit - 70003757 Cartridges	
16	70002977	1	Cartridge, Crossover Relief	
16	7021653	1	Seal Kit - 70002977 Cartridge	
17	See Note	1	Orifice .060 (Note: Not Available for Purchase)	
18	See Note	2	Orifice .100 (Note: Not Available for Purchase)	
19	7017406	5	Plug	
20	See Note	1	Block (Note: Not Available for Purchase)	

SECTION 2 - TURNTABLE

FIGURE 2-3. SWING DRIVE INSTALLATION

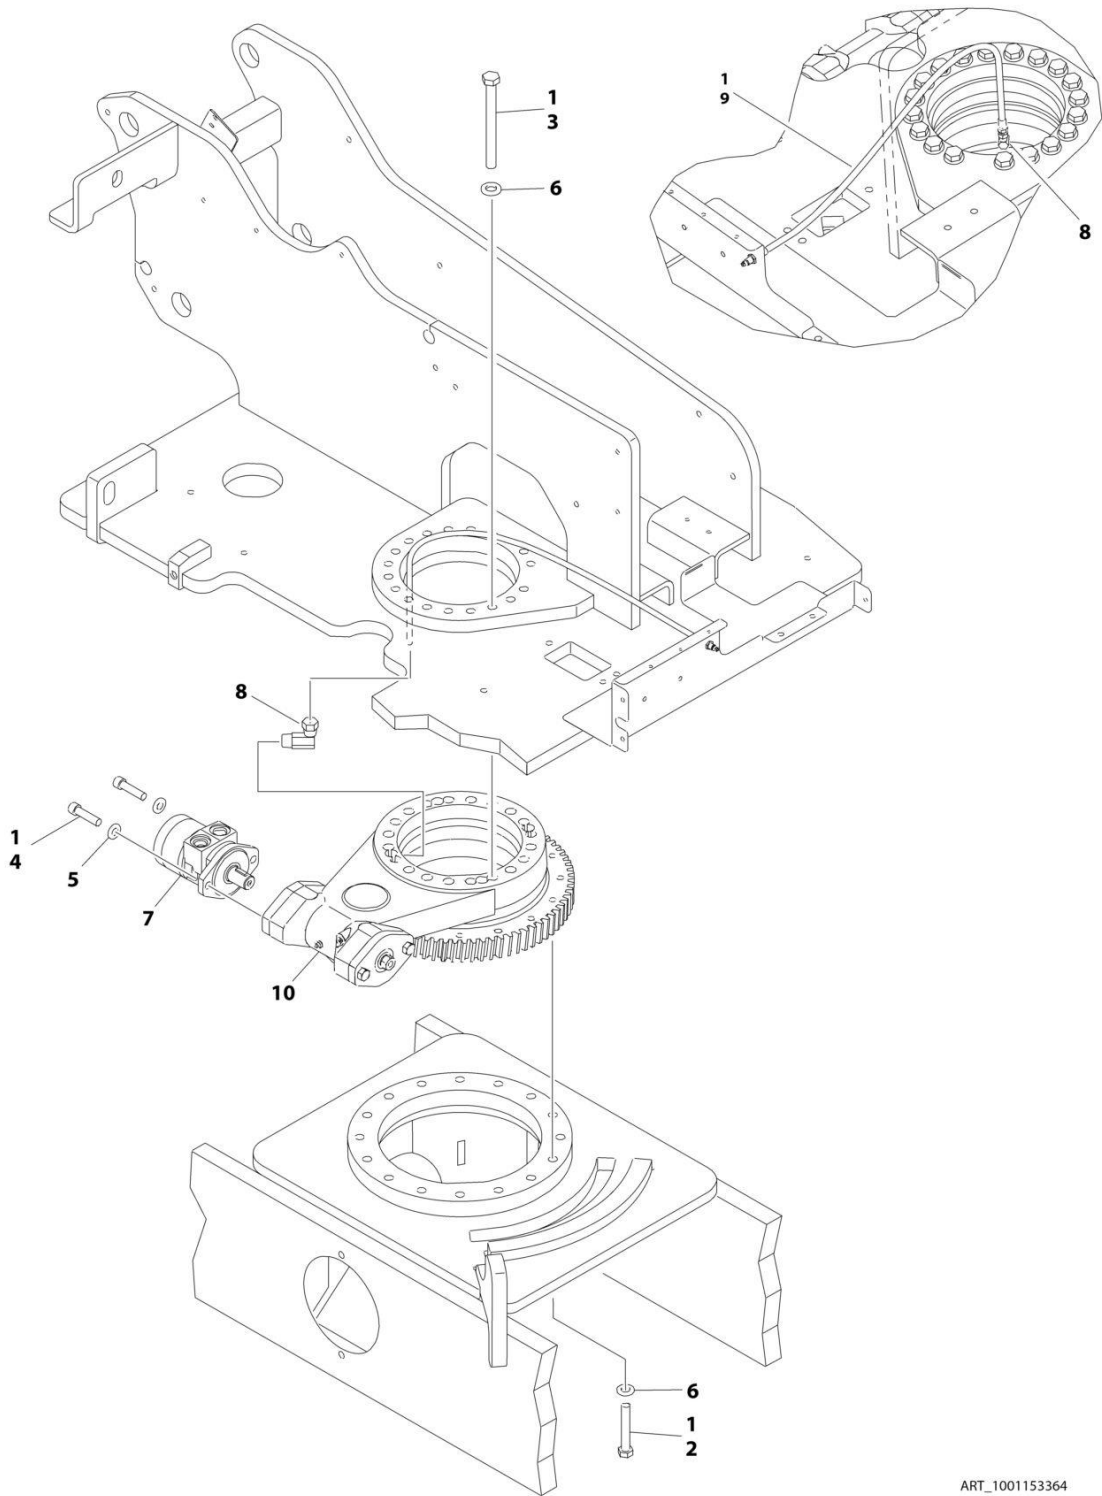

ART_1001153364


SECTION 2 - TURNTABLE

FIGURE 2-3. SWING DRIVE INSTALLATION

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001153364	Ref	SWING DRIVE INSTALLATION	C
1	0100019	AR	Compound, Locking	
2	0711426	16	Bolt M14 x 90 Grade 10.9	
3	0711432	19	Bolt M14 x 150 Grade 10.9	
4	3931832	2	Capscrew 1/2-13 x 2	
5	4740171	2	Washer 1/2	
6	5241400	2	Washer M14	
7	1001107781	1	Swing Motor Assembly (See Separate Breakdown in this Section)	
8	2220124	1	Fitting, Adapter NPT	
9	1001118961	1	Hose, Remote Grease Line (Includes Grease Fitting)	
10	1001153015	1	Swing Bearing and Rotation Box Assembly (See Separate Breakdown in this Section)	

SECTION 2 - TURNTABLE

FIGURE 2-4. SWING MOTOR ASSEMBLY

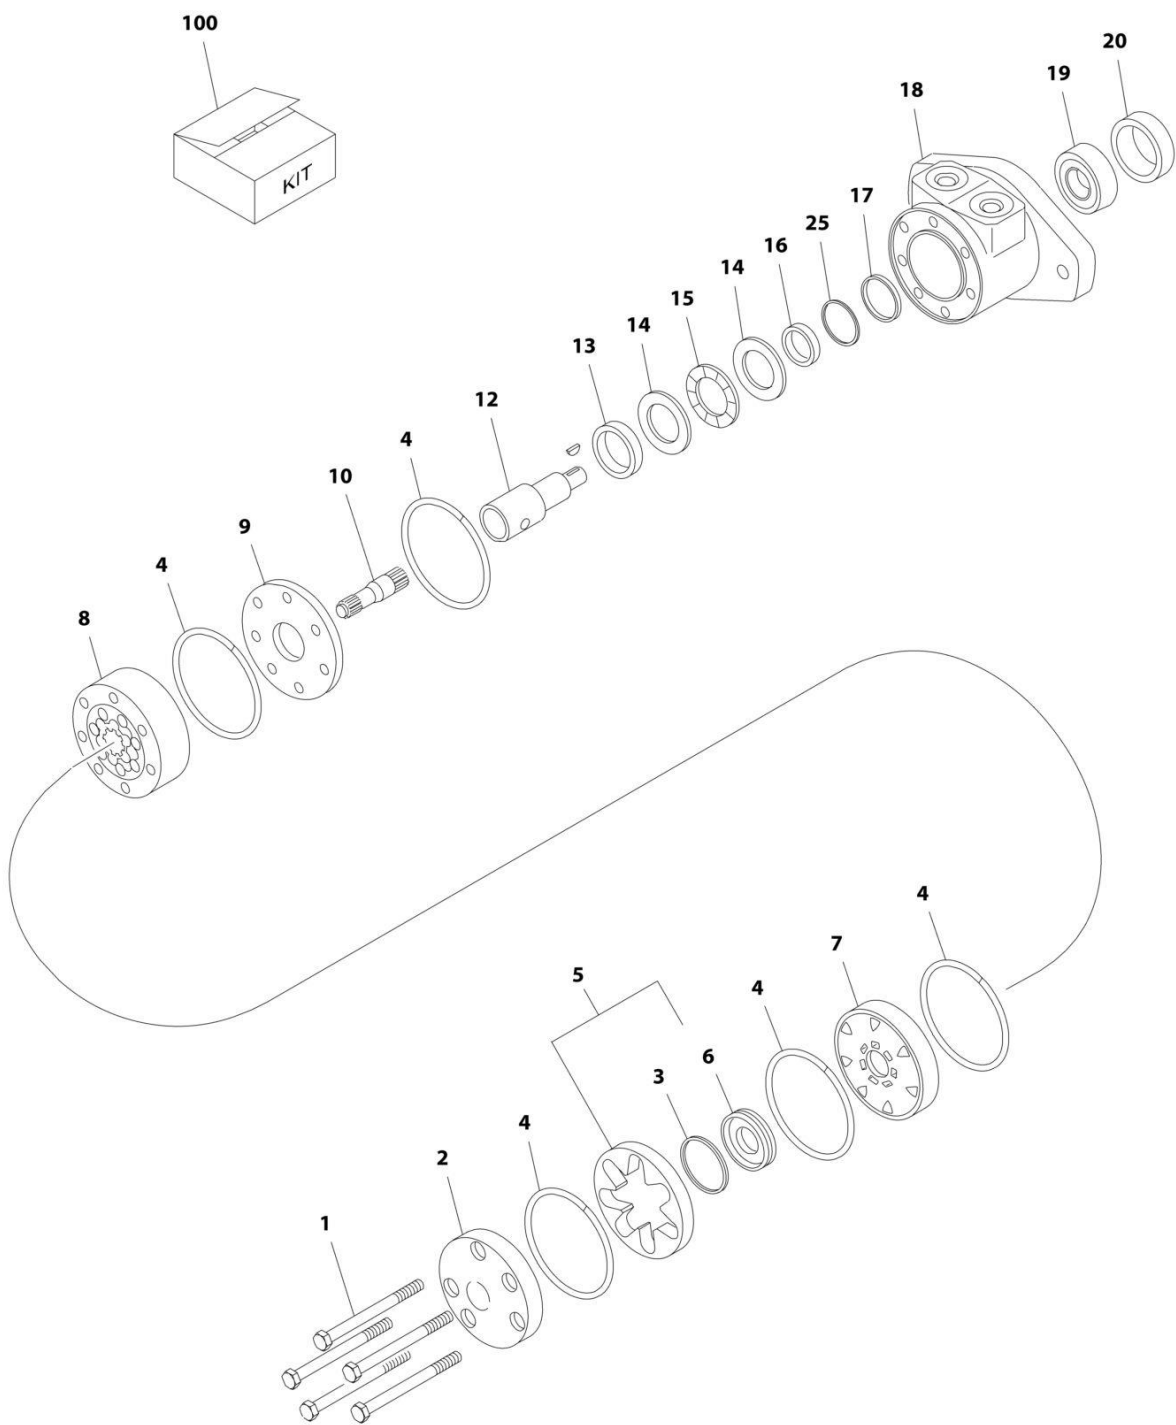

ART_1001107781


SECTION 2 - TURNTABLE

FIGURE 2-4. SWING MOTOR ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001107781	Ref	SWING MOTOR ASSEMBLY	A
1	70002311	5	Bolt	
2	7004035	1	Cover, End	
3	See Note	1	Seal, Commutator (Note: Use p/n 7024389)	
4	See Note	5	Seal, Ring (Note: Use p/n 7024389)	
5	7024453	1	Commutator and Ring Assembly	
6	See Note	1	Ring (Note: Use p/n 7024453)	
7	7024379	1	Manifold	
8	70002312	1	Rotor Set	
9	7024380	1	Plate, Wear	
10	70002313	1	Link, Drive	
12	70000088	1	Shaft, Coupling	
12	70000089	1	Key, Woodruff	
13	7024381	1	Bushing, Bronze	
14	7004043	2	Washer, Thrust	
15	7004044	1	Bearing, Thrust	
16	See Note	1	Seal, Inner (Note: Use p/n 7024389)	
17	See Note	1	Washer, Back-up (Note: Use p/n 7024389)	
18	See Note	1	Housing (Note: Not Available - Purchase Complete Assembly)	
19	7024390	1	Bearing	
20	See Note	1	Seal (Note: Use p/n 7024389)	
25	See Note	1	Washer, Back-up (Note: Use p/n 7024389)	
100	7024389	1	Seal Kit (Includes Items 3, 4, 16,17, 20 & 25)	

SECTION 2 - TURNTABLE

FIGURE 2-5. SWING BEARING ASSEMBLY

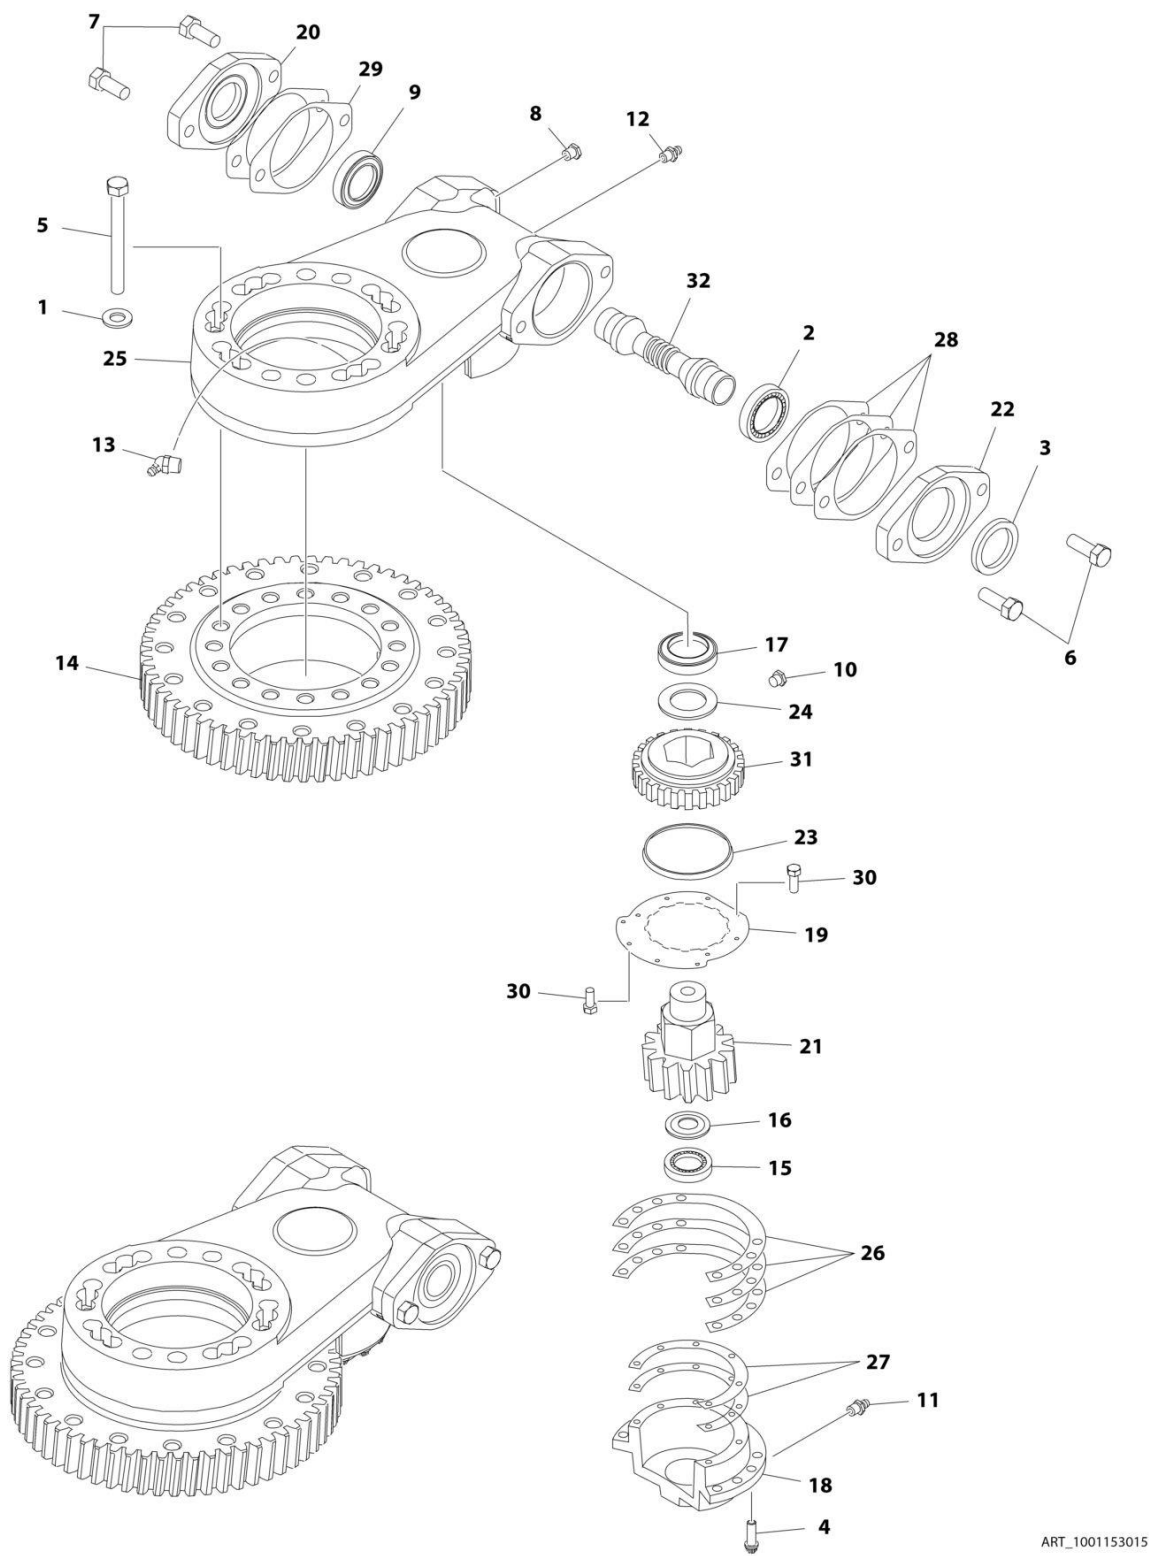

ART_1001153015


SECTION 2 - TURNTABLE

FIGURE 2-5. SWING BEARING ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001153015	Ref	SWING BEARING ASSEMBLY	B
1	7026041	2	Washer 5/16	
2	70002643	2	Cup, Bearing	
2	70002644	2	Cone, Bearing	
3	70002645	1	Seal	
4	70002646	8	Bolt 5/16 x 7/8	
5	70003138	2	Bolt 5/16 x 2-1/2	
6	70002647	2	Bolt 1/2 x 1	
7	70002648	2	Bolt 1/2 x 1-1/4	
8	70002649	1	Vent, Pressure	
9	70002650	1	Seal	
10	70003139	1	Plug 1/4	
11	70002651	1	Fitting, Grease 1/4	
12	70002652	1	Fitting, Grease 1/8 Straight	
13	7027359	1	Fitting, Grease 1/8 90	
14	1001160531	1	Turntable Bearing Kit (Includes Bearing and Hardware (was p/n 1001143932 & 70003140)	
15	70002656	1	Cup, Bearing	
15	70002657	1	Cone, Bearing	
16	70002658	1	Ring, Grease	
17	7026048	1	Cup, Bearing	
17	7026049	1	Cone, Bearing	
18	70002659	1	Cap, Gear	
19	70003141	1	Plate, Cover	
20	70002661	1	Cap, Worm	
21	70003142	1	Pinion, Output	
22	70002663	1	Adapter, Motor	
23	70002664	1	Seal, Face	
24	7026052	1	Spacer, Washer	
25	See Note	1	Housing (Note: Not Available - Purchase Complete Assembly)	
26	70002665	1	Shim .0075 Natural	
26	70002666	1	Shim .005 Blue	
26	70002667	1	Shim .003 Green	
27	70002668	1	Shim .005 Blue	
27	70002669	1	Shim .020 Yellow	
28	7027352	1	Gasket .010 Brown	
28	7027351	1	Gasket .0075 Clear	
28	7027350	1	Gasket .005 Blue	
29	7027353	1	Gasket .020 Yellow	
30	70000681	10	Bolt #6 x 3/8	
31	70002670	1	Gear, Worm	
32	70002671	1	Shaft, Worm	

SECTION 2 - TURNTABLE

FIGURE 2-6. TANKS AND PUMP ASSEMBLY

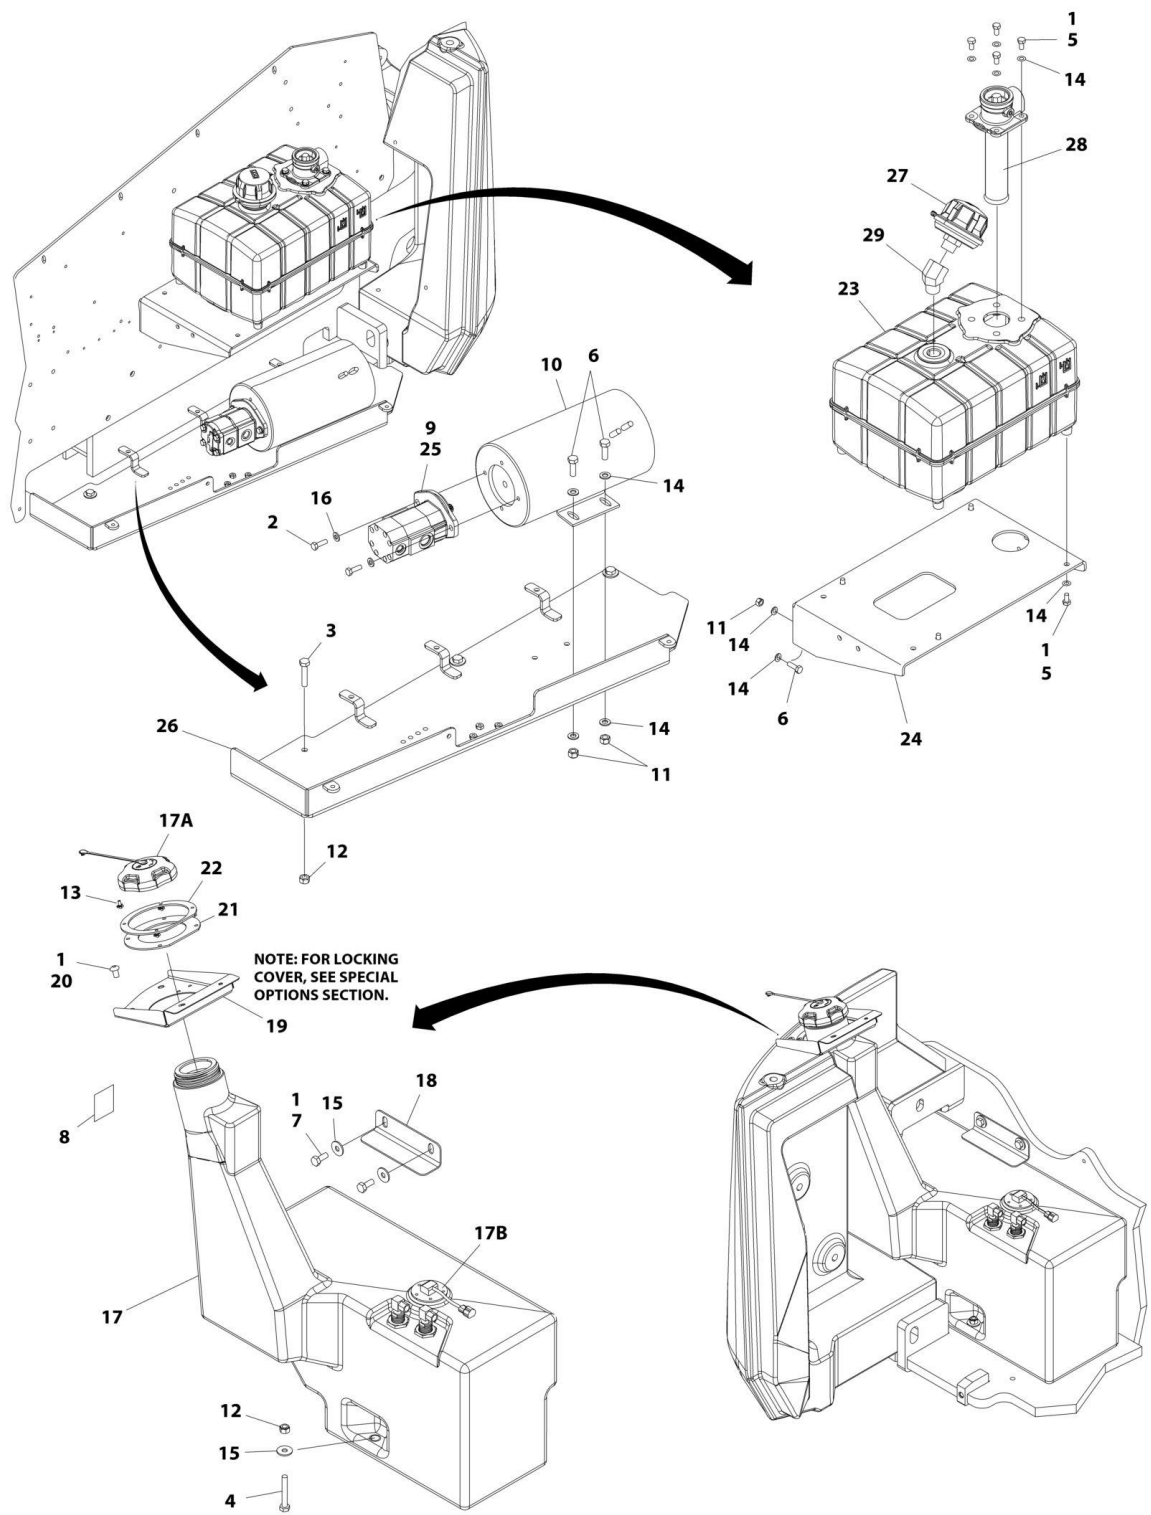

ART_1001169196


SECTION 2 - TURNTABLE

FIGURE 2-6. TANKS AND PUMP ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001169196	Ref	TANKS AND PUMP INSTALLATION	H
1	0100011	AR	Compound, Locking	
2	0700812	2	Bolt M8 x 25	
3	0701018	3	Bolt M10 x 50	
4	0701022	1	Bolt M10 x 70	
5	0760808	8	Bolt M8 x 16	
6	0760812	8	Bolt M8 x 25	
7	0761012	2	Bolt M10 x 25	
8	1701505	1	Decal - Diesel Fuel	
9	3020037	AR	Lubricant, Coupling	
10	3160252	1	Hydraulic Pump Motor Assembly (See Separate Breakdown in this Section)	
11	3290805	8	Nut M8	
12	3291005	4	Nut M10	
13	3820032	4	Rivet	
14	4811900	24	Washer M8	
15	4812002	9	Washer M10	
16	4891500	2	Washer 5/16	
17	1001117897	1	Fuel Tank Assembly (Note: Parts listed below are the only service parts available. For any other parts, source locally or purchase complete tank p/n 1001117897)	
17A	1001128798	1	Cap, Fill	
17B	1001118262	1	Sender (Includes Seal - Seal Not Sold Separately)	
17B	0721004	5	Screw #10-24 x 1/2	
18	1001118509	1	Support, Tank	
19	1001118510	1	Shield, Tank Neck	
20	1001119527	2	Screw M10 x 12	
21	1001128781	1	Seal, Tank Neck	
22	1001128782	1	Ring, Tank Neck	
23	1001162117	1	Tank, Hydraulic	
24	1001162748	1	Bracket, Tank	
25	1001205844	1	Hydraulic Pump Assembly (Note: Seal Kit is only replacement part. For all other components, replace complete assembly)	
25	70005818	1	Seal Kit - 1001205844 Pump	
26	1001169195	1	Shield	
27	1001178594	1	Filler/Air Breather Filter	
28	1001178731	1	Filter, Oil Return	
28	1001178595	1	Element, Filter	
29	1001205158	1	Fitting, 45 NPT	

SECTION 2 - TURNTABLE

FIGURE 2-7. HYDRAULIC PUMP MOTOR ASSEMBLY

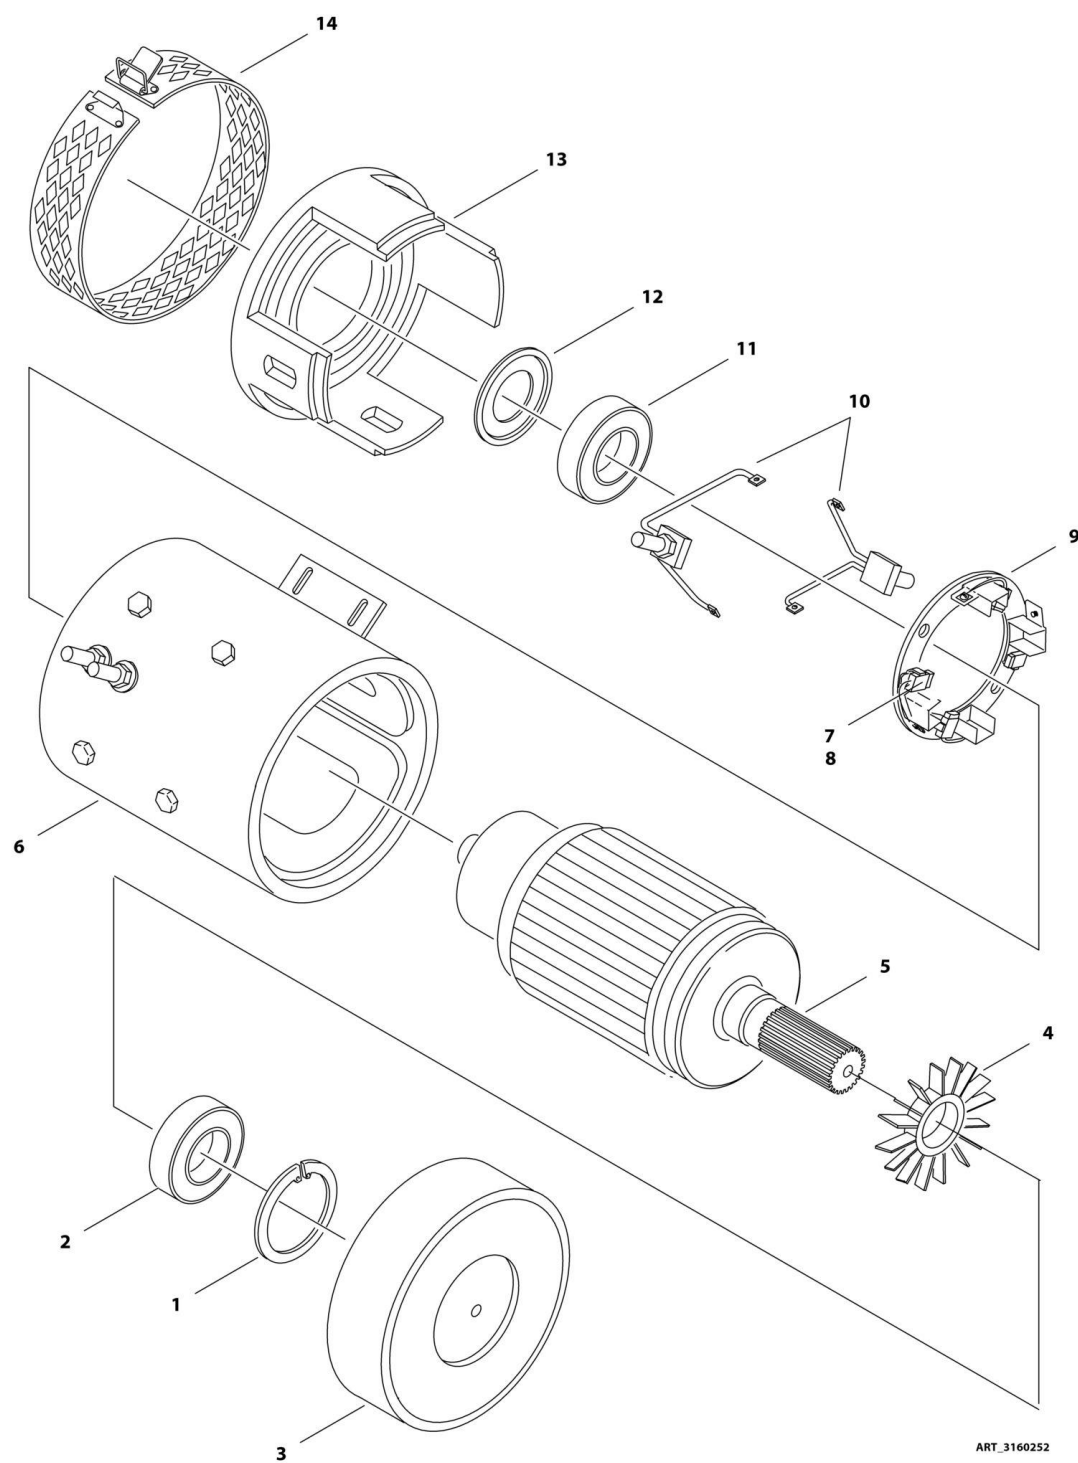


SECTION 2 - TURNTABLE

FIGURE 2-7. HYDRAULIC PUMP MOTOR ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	3160252	Ref	MOTOR ASSEMBLY	C
1	7020291	1	Ring, Retaining	
2	7020292	1	Bearing (Shaft End)	
3	7020293	1	Endhead, Shaft	
4	7020294	1	Fan	
5	7020295	1	Armature Assembly	
6	7020296	1	Field Coil/Case Kit	
7	7012548	8	Spring, Brush	
8	7020297	8	Brush	
9	7020298	1	Box Assembly - Brush	
10	7020299	1	Lead Kit, Brush Wire	
11	7012545	1	Bearing (Commutator End)	
12	7012549	1	Washer	
13	7023200	1	Endhead, Commutator	
14	7023272	1	Headband Assembly	

SECTION 2 - TURNTABLE

FIGURE 2-8. GROUND CONTROLS INSTALLATION - ALL SPECS EXCEPT CE SPECS

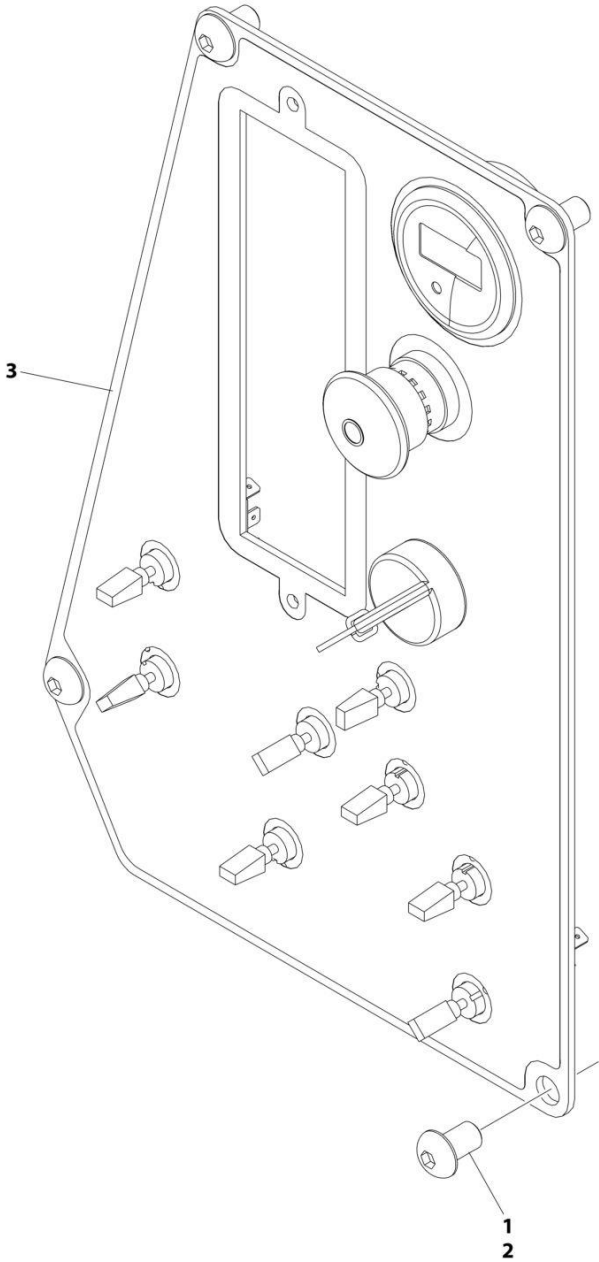

ART_1001247069

SECTION 2 - TURNTABLE

FIGURE 2-8. GROUND CONTROLS INSTALLATION - ALL SPECS EXCEPT CE SPECS

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001247069	Ref	GROUND CONTROL PANEL INSTALLATION	A
1	0100011	AR	Compound, Locking	
2	1001119527	4	Screw M10 x 16	
3	1001247070	1	Ground Control Assembly (See Separate Breakdown in this Section)	


SECTION 2 - TURNTABLE

FIGURE 2-9. GROUND CONTROLS ASSEMBLY - ALL SPECS EXCEPT CE SPECS

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001247070	Ref	GROUND CONTROL ASSEMBLY - ALL SPECS EXCEPT CE SPECS	A
1	3910804	6	Screw #8-32 x 1/4	
2	4360328	8	Switch, Toggle	
3	4360469	1	Switch, Key	
3	2860030	1	Key, Replacement	
4	4360475	1	Switch, Emergency Stop	
4A	7020175	1	Cap	
4B	7020176	1	Block, Switch Contact	
5	4360476	1	Block, Switch Contact	
6	1001109503	1	Gauge, Indicator	
7	1001151393	1	Shim	
8	1001165851	1	Panel	
9	1001221400	1	Decal - Ground Control	

SECTION 2 - TURNTABLE

FIGURE 2-10. GROUND CONTROL INSTALLATION - CE SPEC

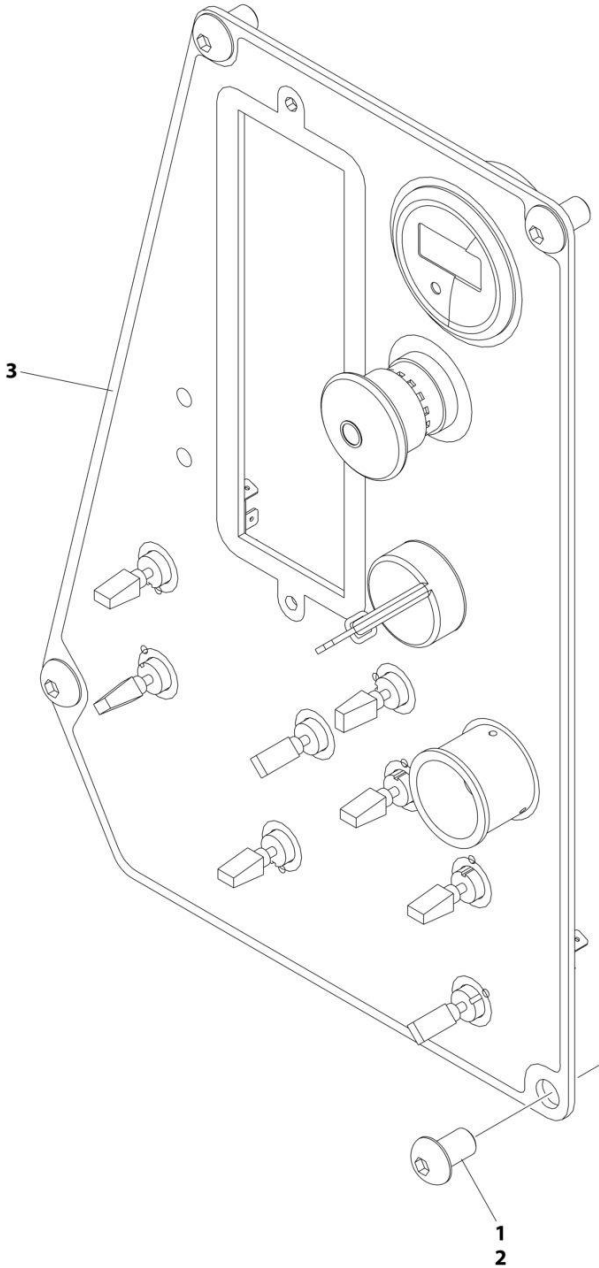

ART_1001247071


SECTION 2 - TURNTABLE

FIGURE 2-10. GROUND CONTROL INSTALLATION - CE SPEC

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001247071	Ref	GROUND CONTROL PANEL INSTALLATION (MSSO)	A
1	0100011	AR	Compound, Locking	
2	1001119527	4	Screw M10 x 16	
3	1001247072	1	Ground Control Assembly (See Separate Breakdown in this Section)	

SECTION 2 - TURNTABLE

FIGURE 2-11. GROUND CONTROL ASSEMBLY - CE SPEC

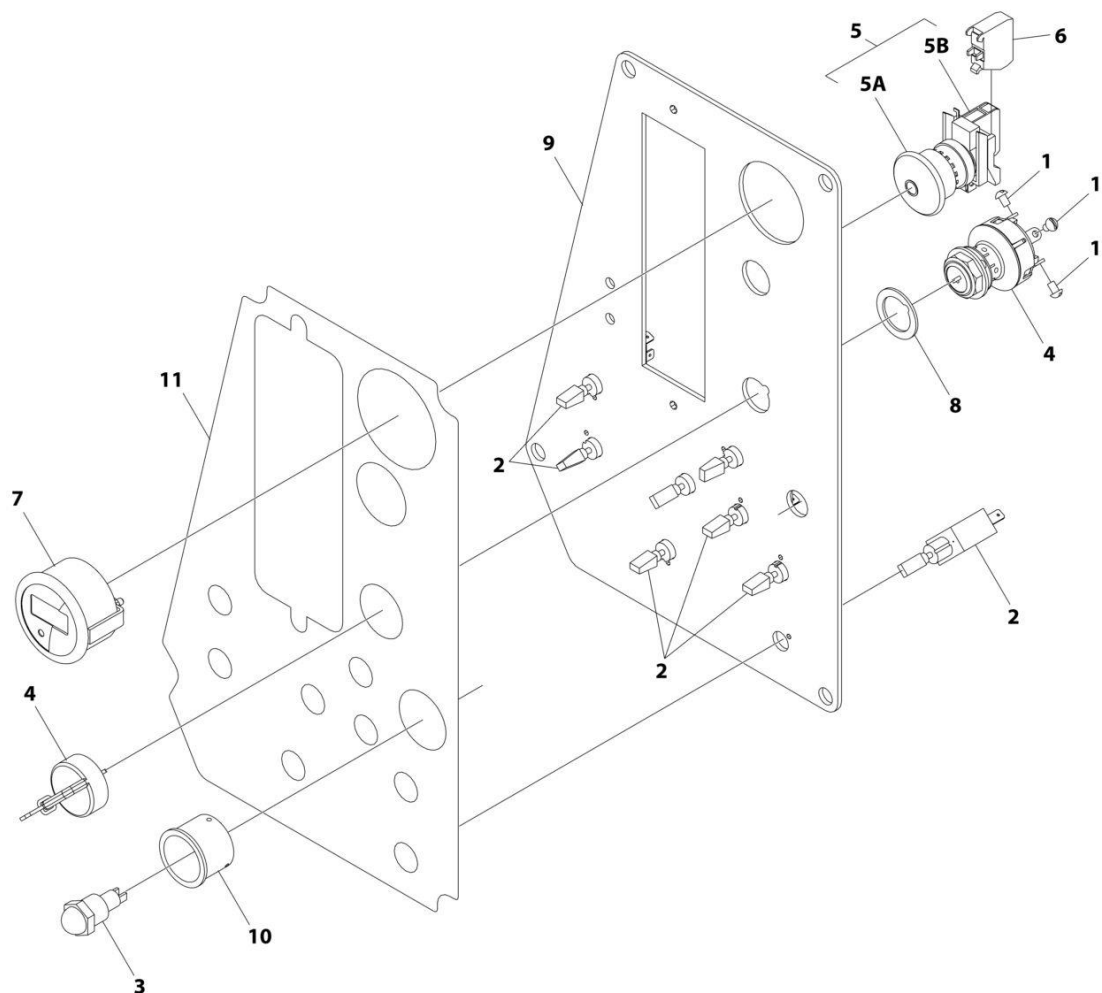

ART_1001247072


SECTION 2 - TURNTABLE

FIGURE 2-11. GROUND CONTROL ASSEMBLY - CE SPEC

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001247072	Ref	GROUND CONTROL ASSEMBLY - CE SPEC	A
1	3910804	6	Screw #8-32 x 1/4	
2	4360328	8	Switch, Toggle	
3	4360387	1	Switch, Push Button	
4	4360469	1	Switch, Key	
4	2860030	1	Key, Replacement	
5	4360475	1	Switch, Emergency Stop	
5A	7020175	1	Cap	
5B	7020176	1	Block, Switch Contact	
6	4360476	1	Block, Switch Contact	
7	1001109503	1	Gauge, Indicator	
8	1001151393	1	Shim	
9	1001165851	1	Panel	
10	1001176469	1	Shroud, Switch	
11	1001221401	1	Decal - Ground Control (MSSO)	

SECTION 2 - TURNTABLE

FIGURE 2-12. LIGHT PANEL INSTALLATION

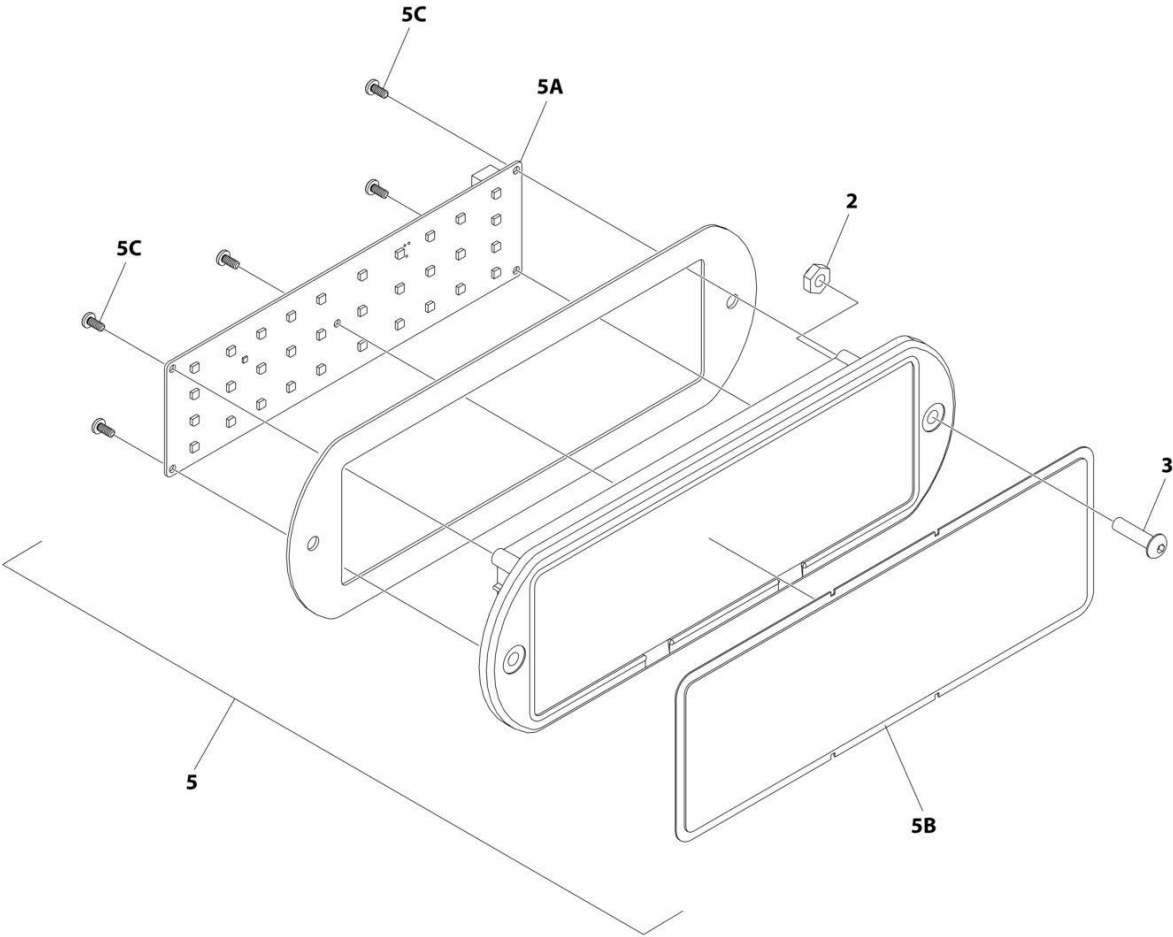

ART_1001245178_1OF2


SECTION 2 - TURNTABLE

FIGURE 2-12. LIGHT PANEL INSTALLATION

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001245178	Ref	LIGHT PANEL INSTALLTION - GROUND CONTROL	B
2	3300408	2	Nut, Nylon Insert	F
3	0630518	1	Screw #10 x 3/4	
5	1001245209	1	Light Panel Assembly	
5A	1001238732	1	Panel, LED Light	
5B	1001245163	1	Lens, I-Con	
5C		Ref	Screw	

SECTION 2 - TURNTABLE

FIGURE 2-13. BATTERY CHARGER INSTALLATION - 110V PLUG

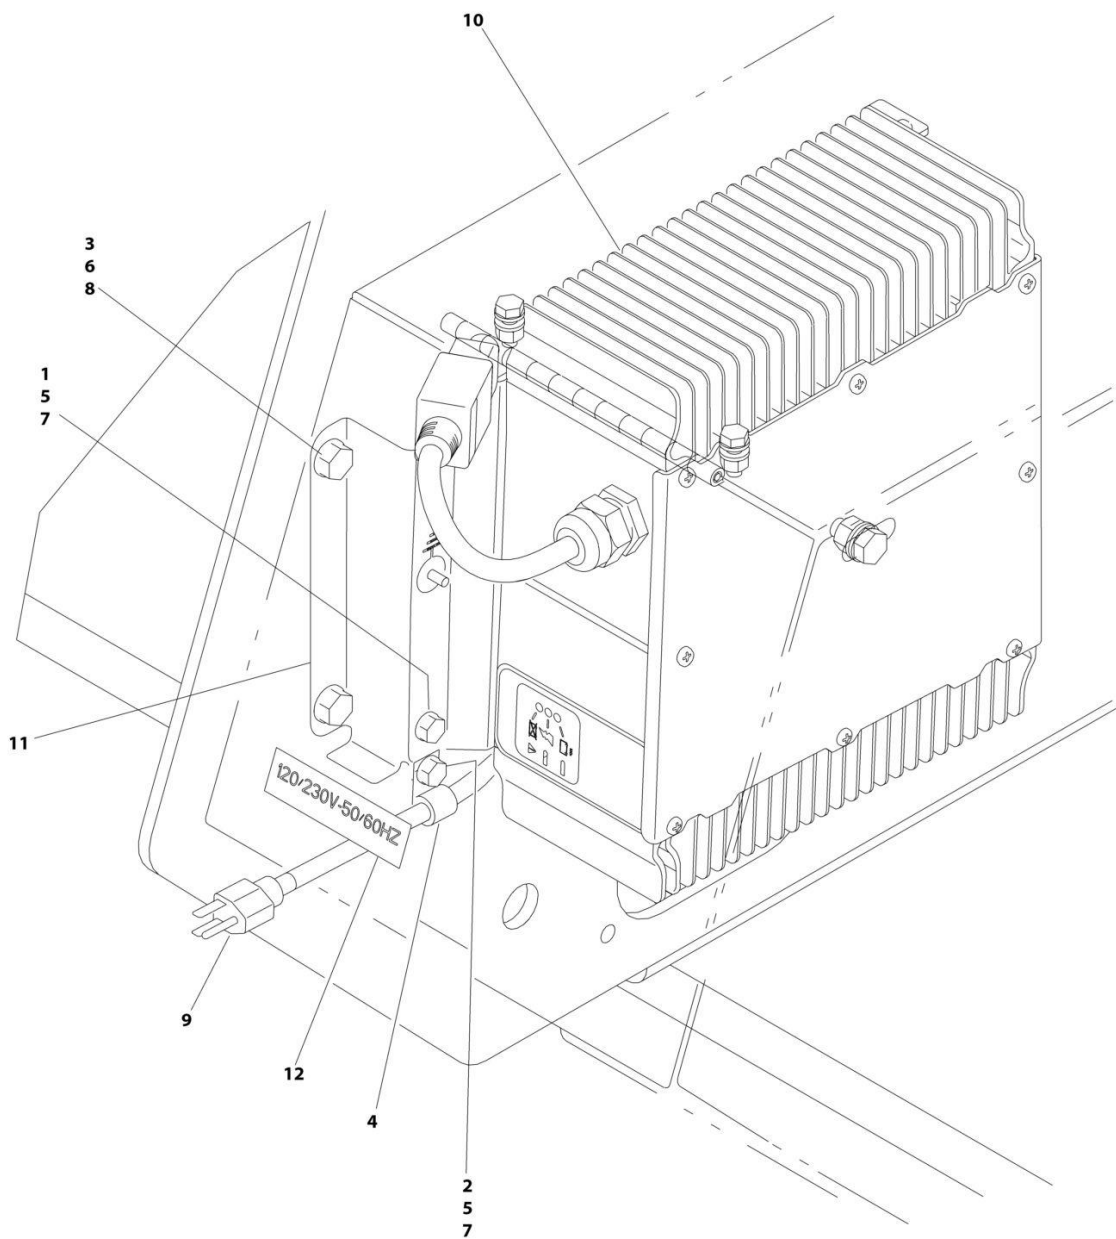

ART_1001174019


SECTION 2 - TURNTABLE

FIGURE 2-13. BATTERY CHARGER INSTALLATION - 110V PLUG

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001174019	Ref	BATTERY CHARGER INSTALLATION - 110V PLUG	C
1	0760608	4	Bolt M6 x 16	
2	0760610	1	Bolt M6 x 20	
3	0760812	4	Bolt M8 x 25	
4	1321293	1	Clamp	
5	3290605	5	Nut M6	
6	3290805	4	Nut M8	
7	4811700	10	Washer M6	
8	4811900	8	Washer M8	
9	1001103257	1	Cable, AC Battery Charger Input	
10	1001197707	1	Battery Charger Assembly (See Separate Breakdown in this Section)	
11	1001169420	2	Plate	
12	1001186845	1	Decal - 120/230V - 50/60Hz	

SECTION 2 - TURNTABLE

FIGURE 2-14. BATTERY CHARGER INSTALLATION - LOCALLY SUPPLIED PLUG

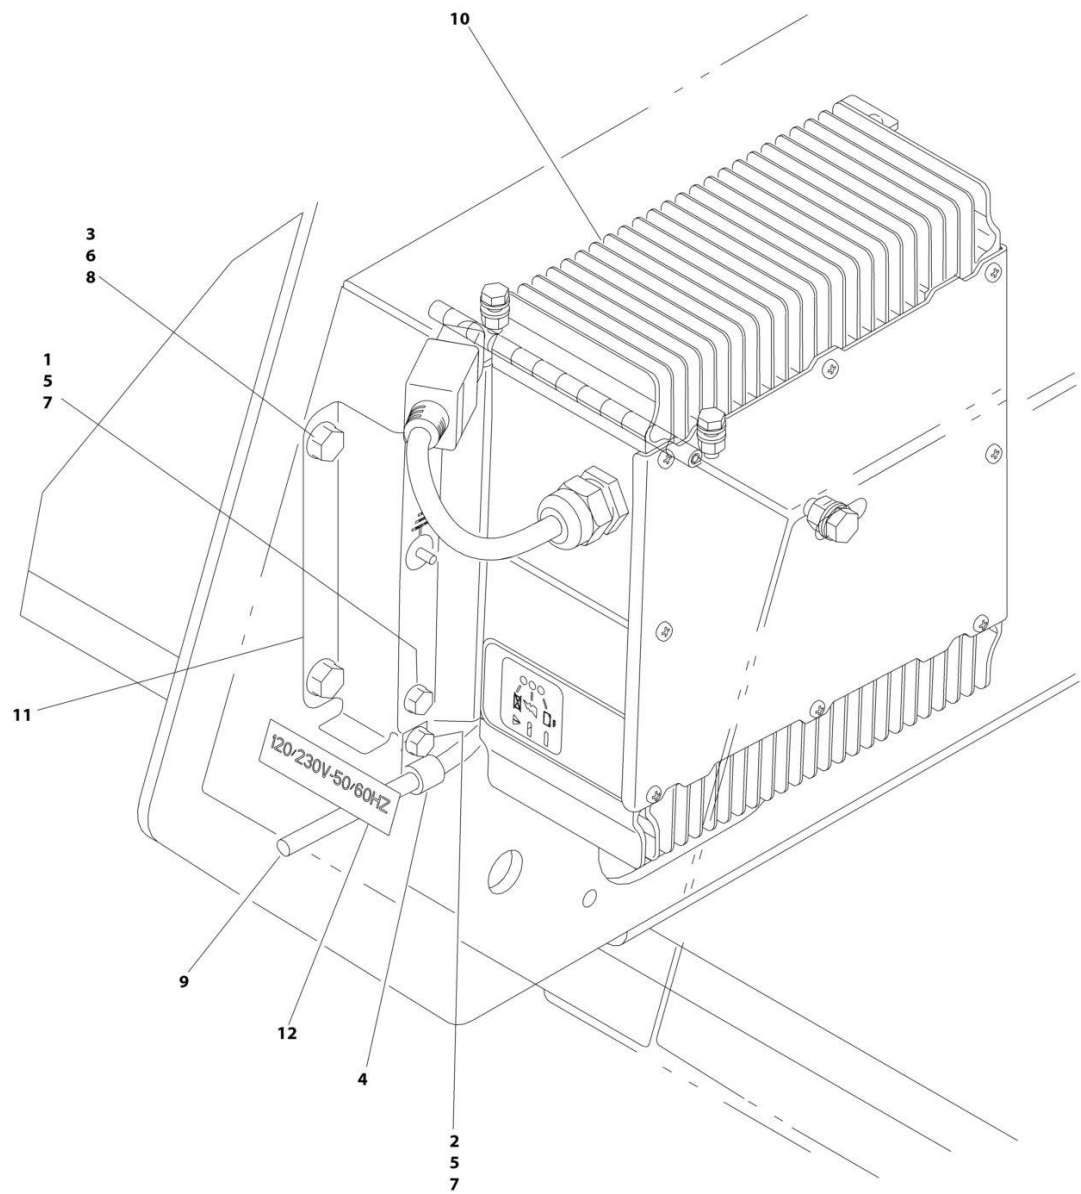

ART_1001174020


SECTION 2 - TURNTABLE

FIGURE 2-14. BATTERY CHARGER INSTALLATION - LOCALLY SUPPLIED PLUG

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001174020	Ref	BATTERY CHARGER INSTALLATION - LOCALLY SUPPLIED PLUG	C
1	0760608	4	Bolt M6 x 16	
2	0760610	1	Bolt M6 x 20	
3	0760812	4	Bolt M8 x 25	
4	1321293	1	Clamp	
5	3290605	5	Nut M6	
6	3290805	4	Nut M8	
7	4811700	10	Washer M6	
8	4811900	8	Washer M8	
9	1001103258	1	Cable, AC Input Charger	
10	1001197707	1	Battery Charger Assembly (See Separate Breakdown in this Section)	
11	1001169420	2	Plate	
12	1001186845	1	Decal - 120/230V - 50/60Hz	

SECTION 2 - TURNTABLE

FIGURE 2-15. BATTERY CHARGER ASSEMBLY

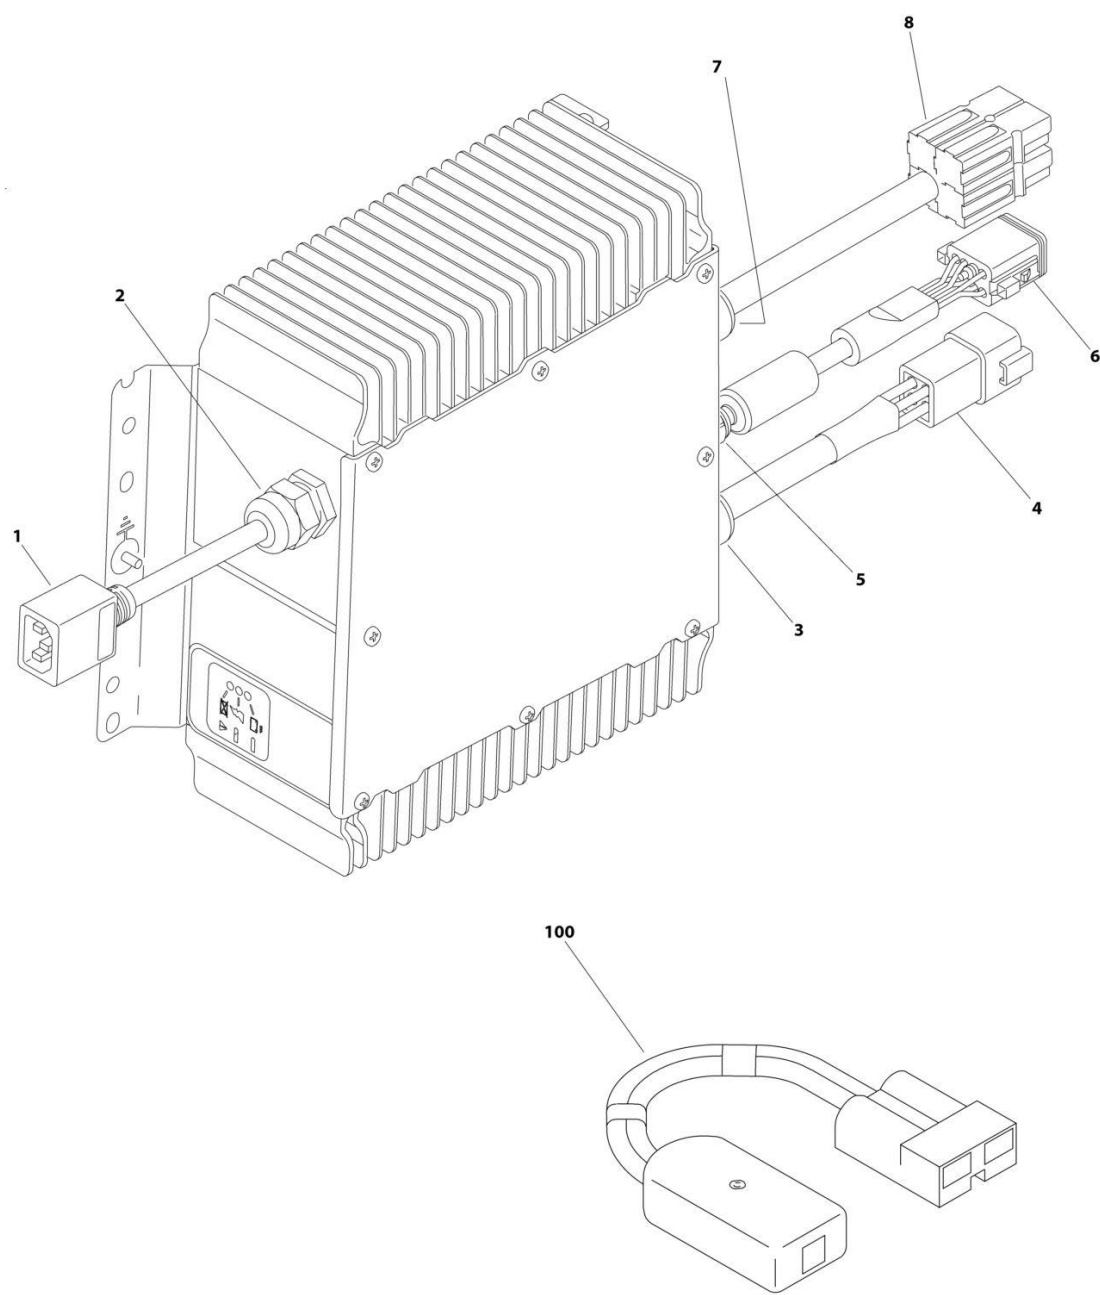

ART_1001197707


SECTION 2 - TURNTABLE

FIGURE 2-15. BATTERY CHARGER ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001197707	Ref	BATTERY CHARGER ASSEMBLY	C
1	See Note	1	Harness with Connector (Note: Not Available for Purchase)	
2	See Note	1	Connector, Strain Relief (Note: Not Available for Purchase)	
3	See Note	1	Connector, Strain Relief (Note: Not Available for Purchase)	
4	1001116811	1	Receptacle, Female - 4 Position	
5	See Note	1	Connector, Strain Relief (Note: Not Available for Purchase)	
6	4460930	1	Plug, Male - 8 Position	
7	See Note	1	Connector, Strain Relief (Note: Not Available for Purchase)	
8	See Note	1	Connector - 4 Position	
100	2915230	1	BATTERY CHARGER REPROGRAM CONTROLLER KIT (Includes Controller, Software and Instructions)	

SECTION 2 - TURNTABLE

FIGURE 2-16. ELECTRICAL COMPONENTS INSTALLATION

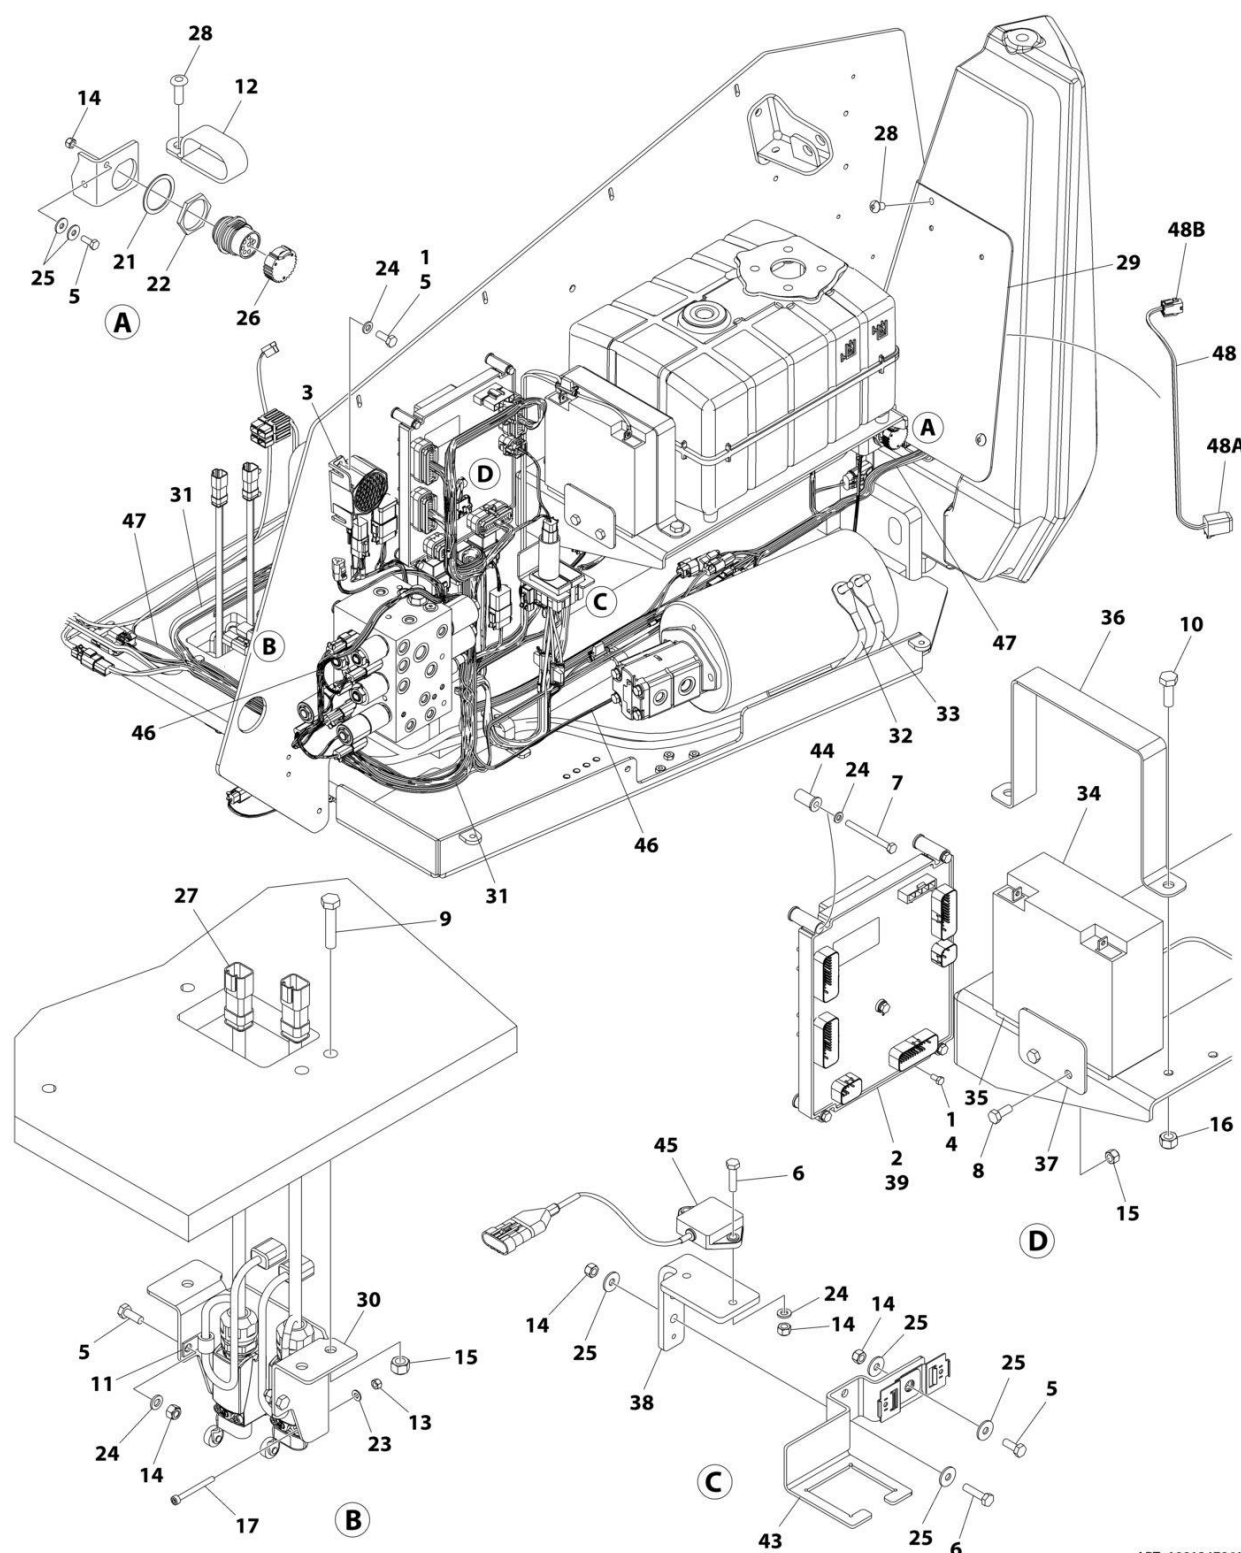

ART_1001247061

SECTION 2 - TURNTABLE

FIGURE 2-16. ELECTRICAL COMPONENTS INSTALLATION


ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001247061	Ref	ELECTRICAL COMPONENTS INSTALLATION	B
1	0100011	AR	Compound, Locking	
2	0100048	AR	Grease, Terminal	
3	0140043	1	Alarm	
4	0760505	3	Bolt M5 X 10	
5	0760608	6	Bolt M6 X 16	
6	0760612	4	Bolt M6 X 25	
7	0760621	5	Bolt M6 X 65	
8	0760810	2	Bolt M8 X 20	
9	0760816	3	Bolt M8 X 40	
10	0761014	2	Bolt M10 X 30	
11	1321293	2	Clamp	
12	1321716	AR	Clamp	
13	3290405	4	Nut M4	
14	3290605	8	Nut M6	
15	3290805	5	Nut M8	
16	3291005	2	Nut M10	
17	4031512	4	Capscrew M4 X 40	
18	4240018	AR	Tie-Strap (Not Shown)	
19	4240032	4	Tie-Strap (Not Shown)	
20	4460234	2	Mount, Tie-Strap (Not Shown)	
21	4460496	1	Washer	
22	4460497	1	Nut	
23	4811400	4	Washer M4	
24	4811700	11	Washer M6	
25	4811702	7	Washer M6	
26	1001106736	1	Cap, Dust	
27	1001119176	2	Switch, Limit	
27	4460464	4	Pin, Male	
27	1001119170	1	Switch, Limit (Roller)	
27	1001129407	1	Receptacle, Female - 4 Position	
28	1001119527	3	Screw M10 X 12	
29	1001125291	1	Shield	
30	1001141710	1	Plate	
31	1001165923	1	Turntable Harness Assembly (See Separate Breakdown in ELECTRICAL Section)	
32	1001168662	1	Cable, Pump Motor (+)	
33	1001168663	1	Cable, Pump Motor (-)	
34	1001172394	1	Battery	
35	1001172395	1	Insulation	
36	1001172396	1	Strap, Battery	
37	1001172541	1	Bracket	
38	1001180464	1	Plate, Mounting	
39	1001183213	1	Module, UGM	
40	1001197941	1	Ferrite (Not Shown - Located on Items 37 & 38)	
41	1001197942	1	Ferrite (Not Shown - Located on Item 34)	
42	1001197943	1	Ferrite (Not Shown - Located on Item 36)	
43	1001201939	1	Bracket	
44	1001203719	5	Nut M6	
45	1001219601	1	Sensor	

SECTION 2 - TURNTABLE

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
46	1001245669	1	Valve Harness Assembly (See Separate Breakdown in ELECTRICAL Section)	
47	1001246670	1	Ground Control Harness (See Separate Breakdown in ELECTRICAL Section)	
48	1001266066	1	Harness, Display	
48A	4460894	1	Connector	
48A	4460465	4	Socket	
48A	4460466	2	Plug	
48B	1001132049	1	Connector	
48B	1001132050	4	Pin	

SECTION 2 - TURNTABLE

FIGURE 2-17. BEACON LIGHT INSTALLATION - AMBER (OPTIONAL)

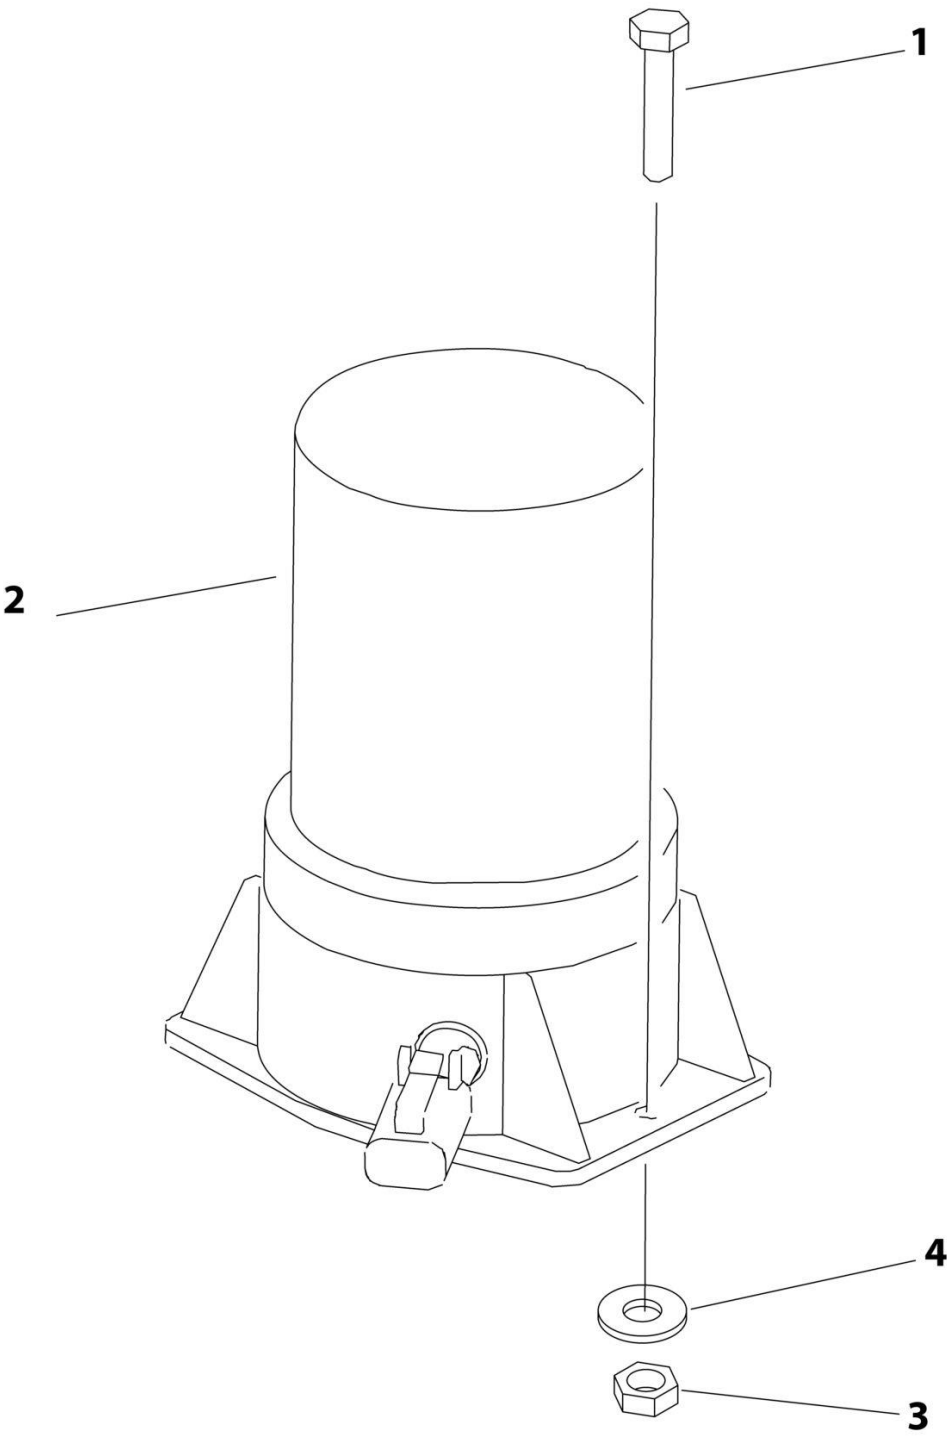

ART_1001172773


SECTION 2 - TURNTABLE

FIGURE 2-17. BEACON LIGHT INSTALLATION - AMBER (OPTIONAL)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001172773	Ref	STROBE LIGHT INSTALLATION - AMBER (OPTIONAL)	A
1	0760410	2	Bolt M4 X 20	
2	2920161	1	Strobe Light Assembly	
2	7016319	1	Bulb	
2	7016372	1	Lens	
2	4460891	1	Plug, Male - 2 Position	
2	4460465	1	Socket, Female	
3	3290405	2	Nut M4	
4	1001091102	4	Washer M4	

SECTION 2 - TURNTABLE

FIGURE 2-18. BEACON LIGHT INSTALLATION - BLUE

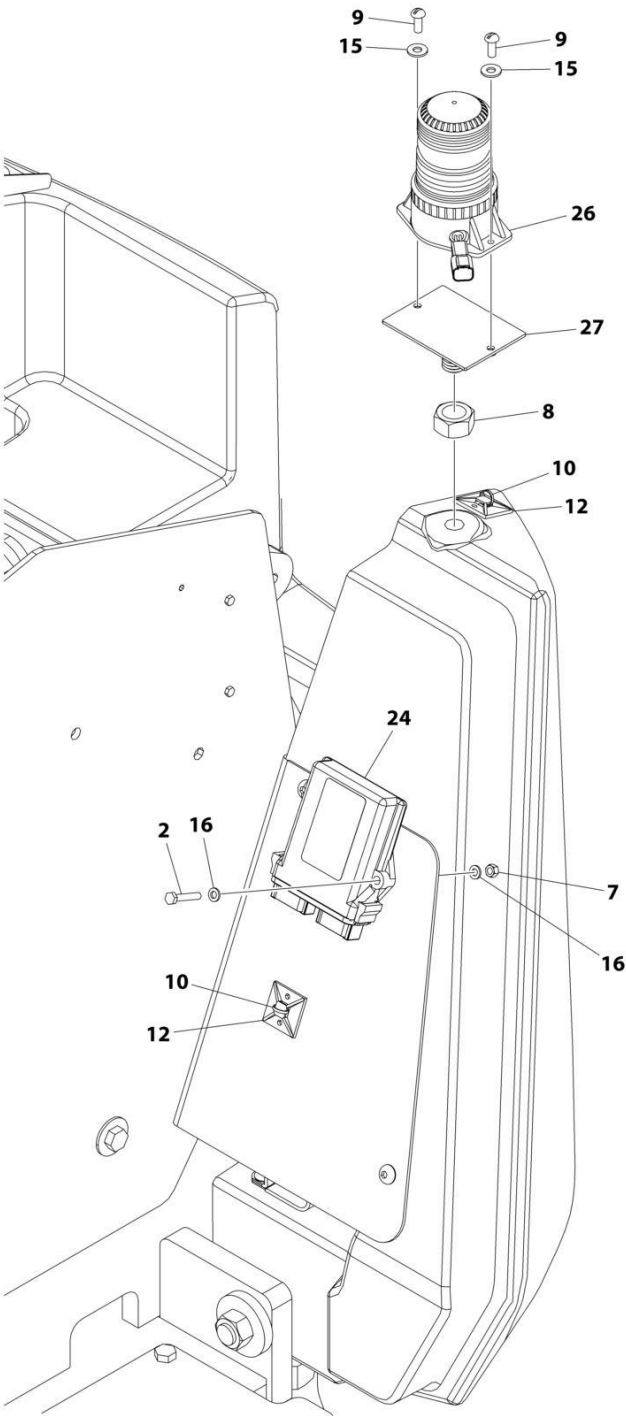

ART_1001242849


SECTION 2 - TURNTABLE

FIGURE 2-18. BEACON LIGHT INSTALLATION - BLUE

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001242849	Ref	BEACON LIGHT INSTALLATION - BLUE	B
2	0700615	2	Bolt M6 x 35	
7	3290607	2	Nut M6	
8	3292001	1	Nut M20	
9	3900085	2	Screw #10 x 1/2	
10	4240032	3	Tie-Strap	
12	4460488	3	Base, Mounting	
15	4751000	2	Washer #10	
16	4811700	4	Washer M6	
24	1001142683	1	Module, Beacon Control	
26	1001200910	1	Light, Strobe	
26	7028909	1	Connector - 2 Position	
26	4460943	2	Pin, Male	
27	1001207227	1	Mount	
28	1001142736	1	Strobe Light Control Harness (Not Shown - See Separate Breakdown in ELECTRICAL Section)	

SECTION 2 - TURNTABLE

FIGURE 2-19. BEACON LIGHT INSTALLATION - RED

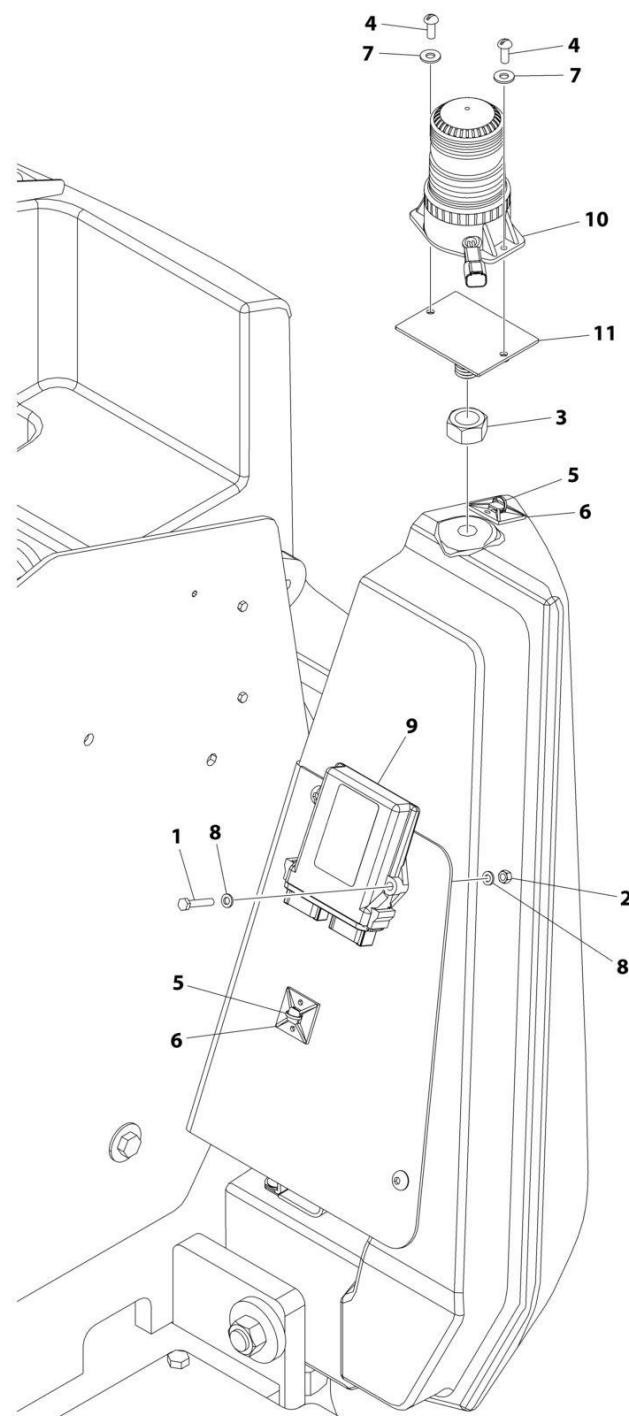

ART_1001242850


SECTION 2 - TURNTABLE

FIGURE 2-19. BEACON LIGHT INSTALLATION - RED

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001242850	Ref	BEACON LIGHT INSTALLATION - RED	A
1	0700615	2	Bolt M6 x 35	
2	3290607	2	Nut M6	
3	3292001	1	Nut M20	
4	3900085	2	Screw #10 x 1/2	
5	4240032	3	Tie-Strap	
6	4460488	3	Base, Mounting	
7	4751000	2	Washer #10	
8	4811700	4	Washer M6	
9	1001142683	1	Module, Beacon Control	
10	1001207004	1	Light, Strobe	
10	7028909	1	Connector - 2 Position	
10	4460943	2	Pin, Male	
11	1001207227	1	Mount	
12	1001142736	1	Strobe Light Control Harness (Not Shown - See Separate Breakdown in ELECTRICAL Section)	

SECTION 2 - TURNTABLE

FIGURE 2-20. WHITE NOISE ALARM INSTALLATION

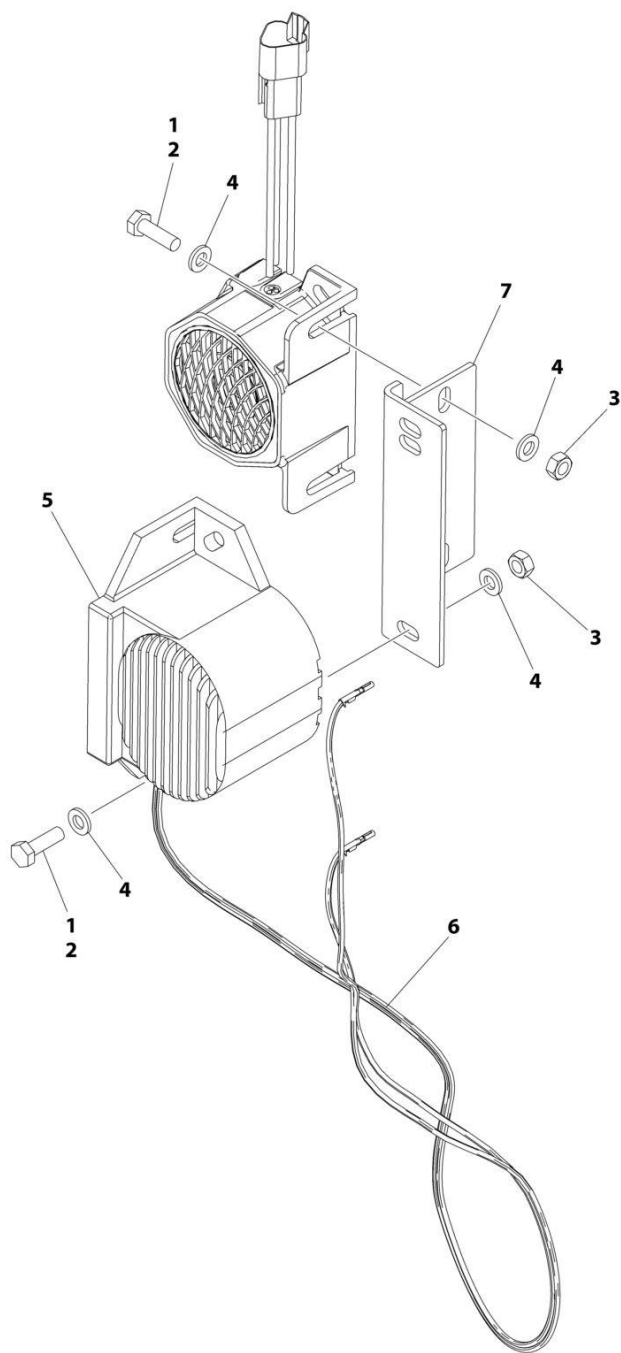

ART_1001212041


SECTION 2 - TURNTABLE

FIGURE 2-20. WHITE NOISE ALARM INSTALLATION

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001212041	Ref	WHITE NOISE ALARM INSTALLATION	C
1	0100011	AR	Compound, Locking	
2	0760610	4	Bolt M6 x 20	
3	3290601	4	Nut M6	
4	4811700	8	Washer M6	
5	1001182806	1	Alarm	
6	1001190663	1	White Noise Alarm Harness	
6	4460891	1	Connector - 2 Position	
6	4460465	2	Socket, Female	
6	4460871	2	Socket, Female	
7	1001231886	1	Plate	


SECTION 2 - TURNTABLE

FIGURE 2-21. HOODS INSTALLATION

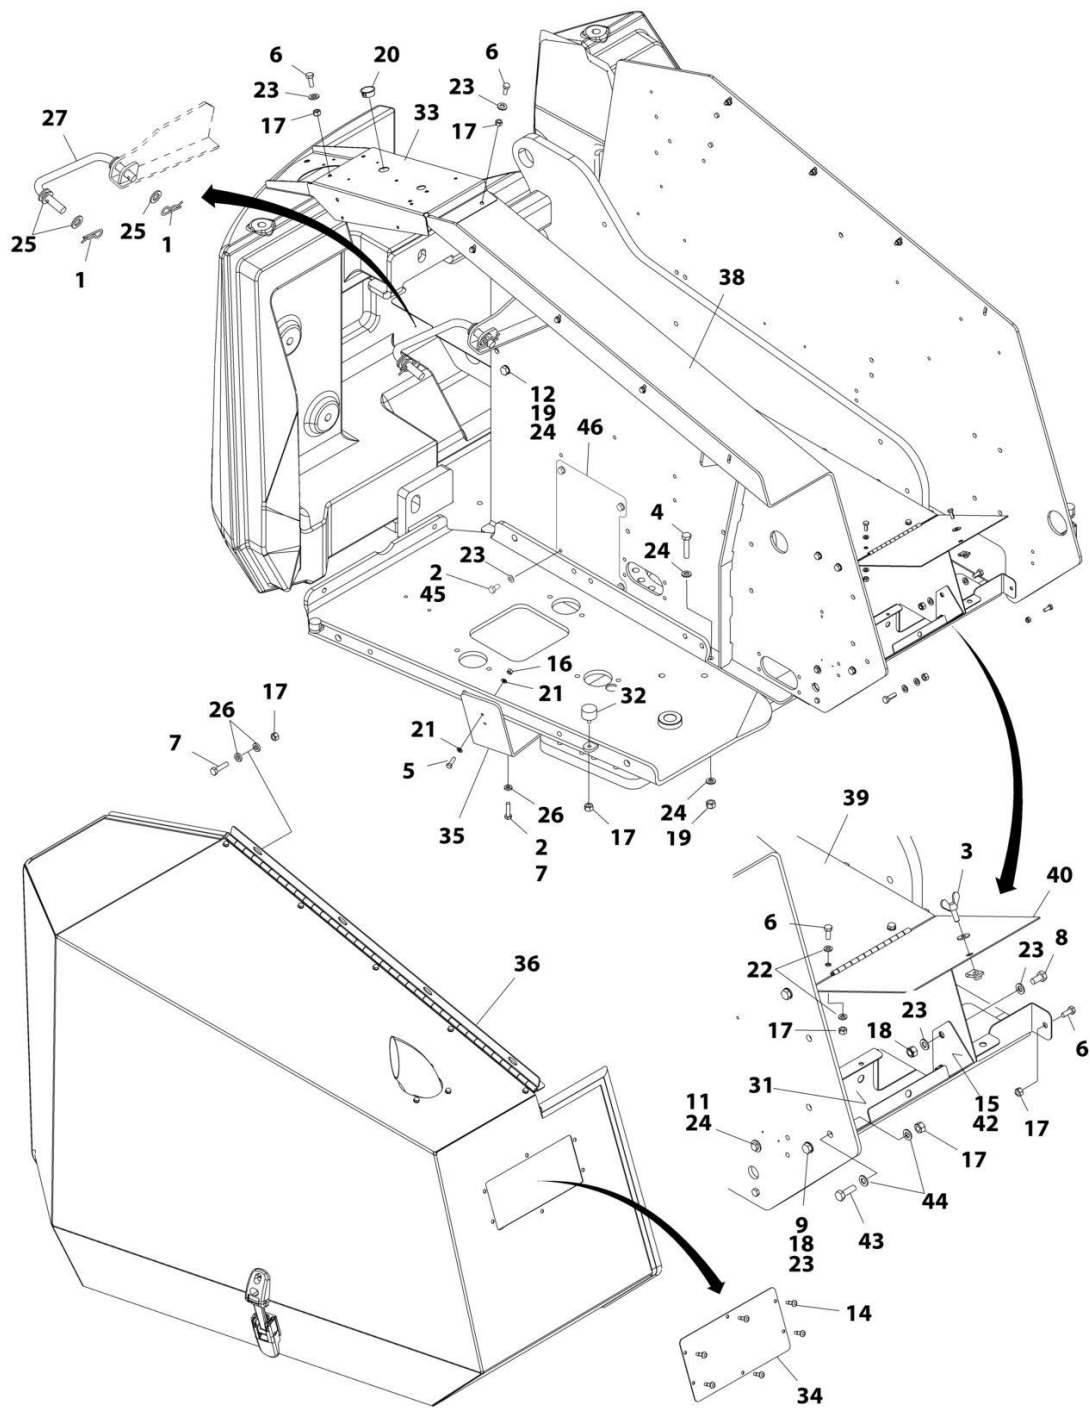

ART_1001166433_1OF2

SECTION 2 - TURNTABLE

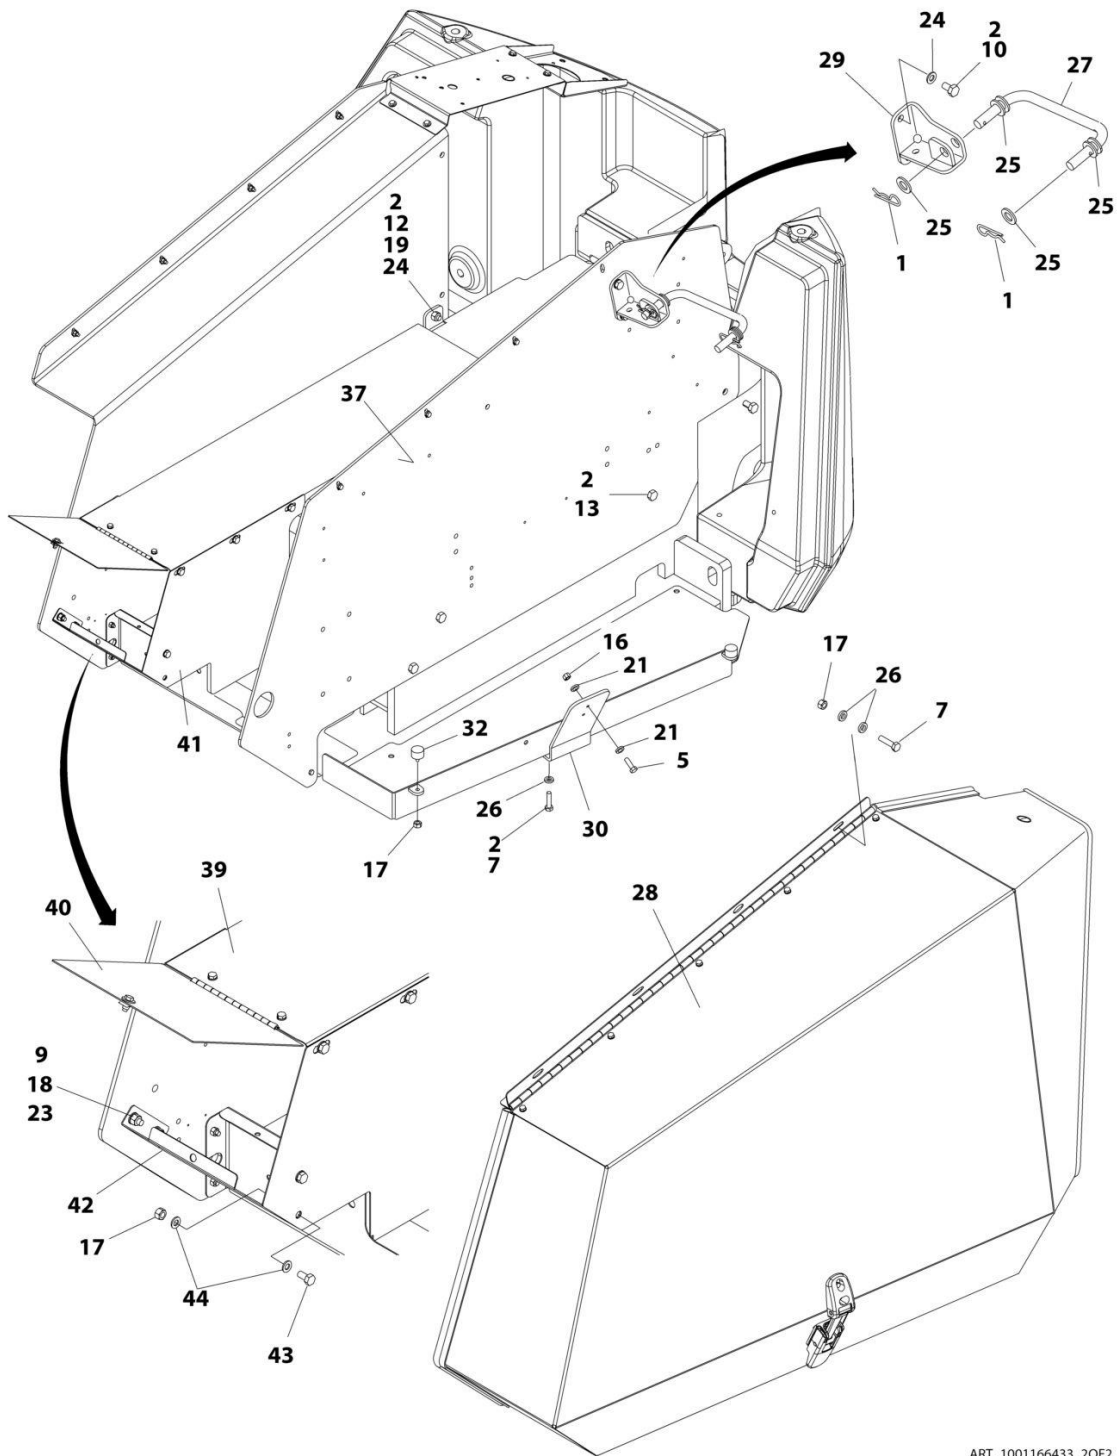

ART_1001166433_20F2

SECTION 2 - TURNTABLE

FIGURE 2-21. HOODS INSTALLATION


ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001166433	Ref	HOODS INSTALLATION	H
1	80325	4	Hairpin	
2	0100011	AR	Compound, Locking	
3	0641506	1	Bolt 5/16-18 x 3/4	
3	0700608	1	Bolt M6 x 16	
3	1001204948	1	Wing-Bolt M6	
4	0701019	2	Bolt M10 x 55	
5	0760508	4	Bolt M5 x 16	
6	0760608	8	Bolt M6 x 16	
7	0760612	14	Bolt M6 x 25	
8	0760808	5	Bolt M8 x 16	
9	0760812	4	Bolt M8 x 25	
10	0761009	2	Bolt M10 x 18	
11	0761011	3	Bolt M10 x 22	
12	0761014	1	Bolt M10 x 30	
13	0761210	4	Bolt M12 x 20	
14	2080040	6	Huck, Fastener	
15	2080050	1	Rivnut	
15	1001130220	1	Nut, Tinnerman	
16	3290505	4	Nut M5	
17	3290605	21	Nut M6	
18	3290805	9	Nut M8	
19	3291005	3	Nut M10	
20	3520030	1	Plug	
21	4811600	8	Washer M5	
22	4811700	4	Washer M6	
23	4811900	26	Washer M8	
24	4812000	10	Washer M10	
25	4812300	8	Washer M16	
26	5240600	22	Washer M6	
27	1001117282	2	Rod, Prop	
28	1001118361	1	Hood Assembly - Tank Side (See Separate Breakdown in this Section)	
29	1001119080	1	Bracket	
30	1001119083	1	Mount, Latch	
31	1001119085	1	Tray	
32	1001119092	4	Bumper	
33	1001119103	1	Panel, Filler	
34	1001137451	1	Panel	
35	1001146824	1	Mount, Latch	
36	1001147441	1	Hood Assembly - Engine Side (See Separate Breakdown in this Section)	
37	1001161537	1	Plate, Hood	
38	1001168234	1	Mount	
39	1001169415	1	Plate, Cover	
40	1001169417	1	Plate, Cover	
41	1001169418	1	Plate, Cover	
42	1001169419	1	Plate, Cover	
43	0760610	1	Bolt M6 x 20	
44	4811702	2	Washer M6	

SECTION 2 - TURNTABLE

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
45	0700808	4	Bolt M8 x 16	
46	1001207961	1	Plate	

SECTION 2 - TURNTABLE

FIGURE 2-22. HOOD ASSEMBLY - TANK SIDE

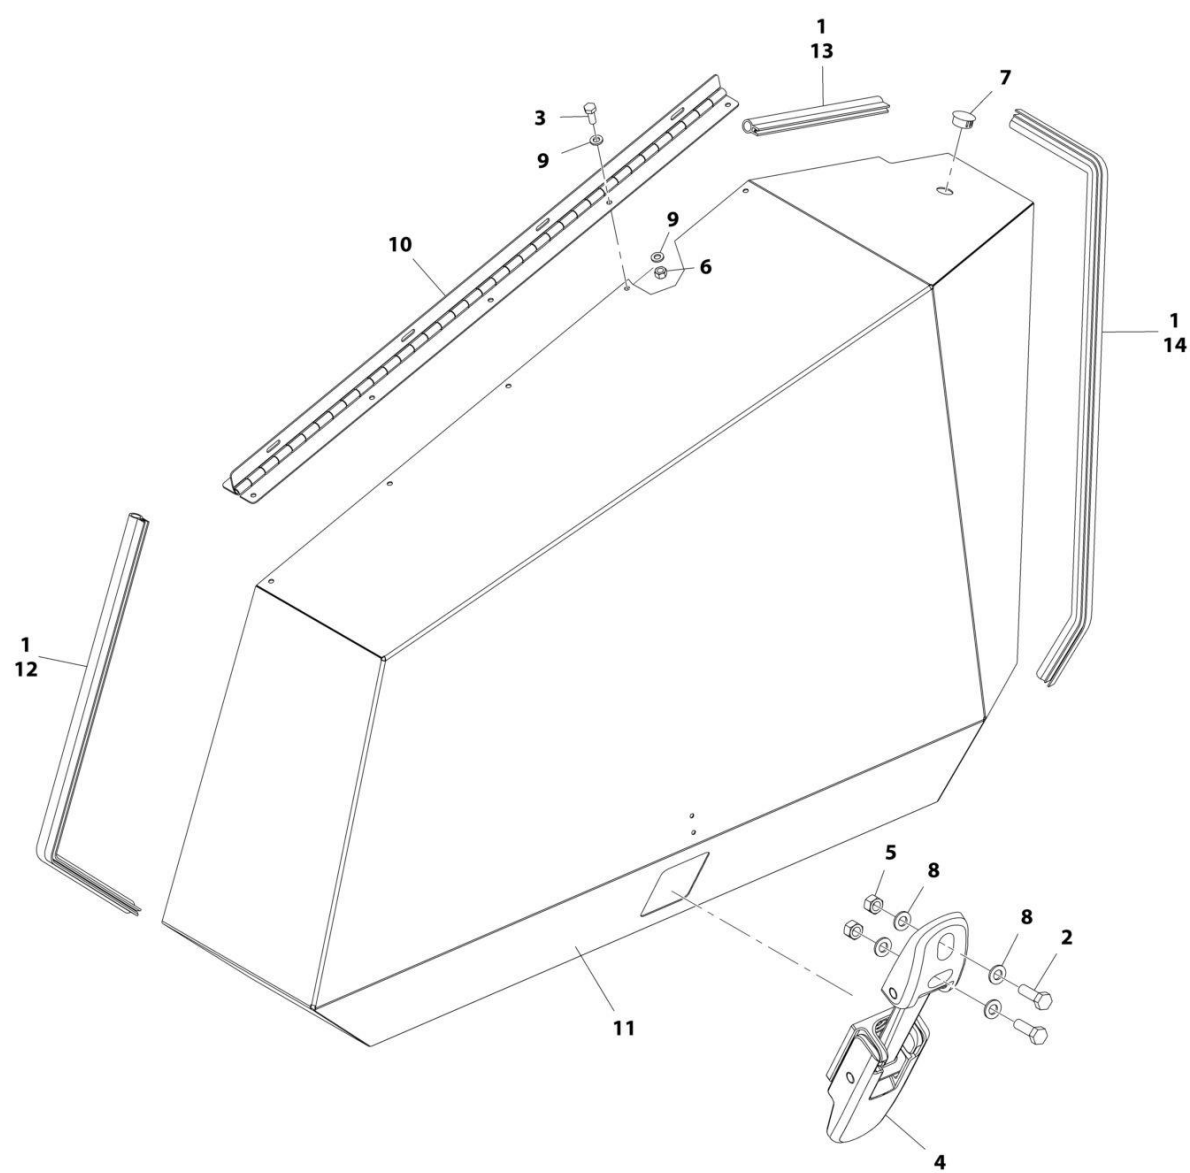

NOTE: REPLACEMENT DECALS MUST BE ORDERED SEPERATELY - SEE DECALS SECTION FOR BREAKDOWN

ART_1001118361


SECTION 2 - TURNTABLE

FIGURE 2-22. HOOD ASSEMBLY - TANK SIDE

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001118361	Ref	HOOD ASSEMBLY - TANK SIDE	B
1	0100081	AR	Adhesive	
2	0760508	2	Bolt M5 x 16	
3	0760608	5	Bolt M6 x 16	
4	2940109	1	Latch	
5	3290505	2	Nut M5	
6	3290605	5	Nut M6	
7	3520030	1	Plug, Hole	
8	4811600	4	Washer M5	
9	4811700	10	Washer M6	
10	1001117281	1	Hinge	
11	See Note	NSS	Hood, Replacement (Note: Use p/n 1001118361)	
12	1001119089	1	Seal	
13	1001119090	1	Seal	
14	1001119091	1	Seal	

SECTION 2 - TURNTABLE

FIGURE 2-23. HOOD ASSEMBLY - ENGINE SIDE

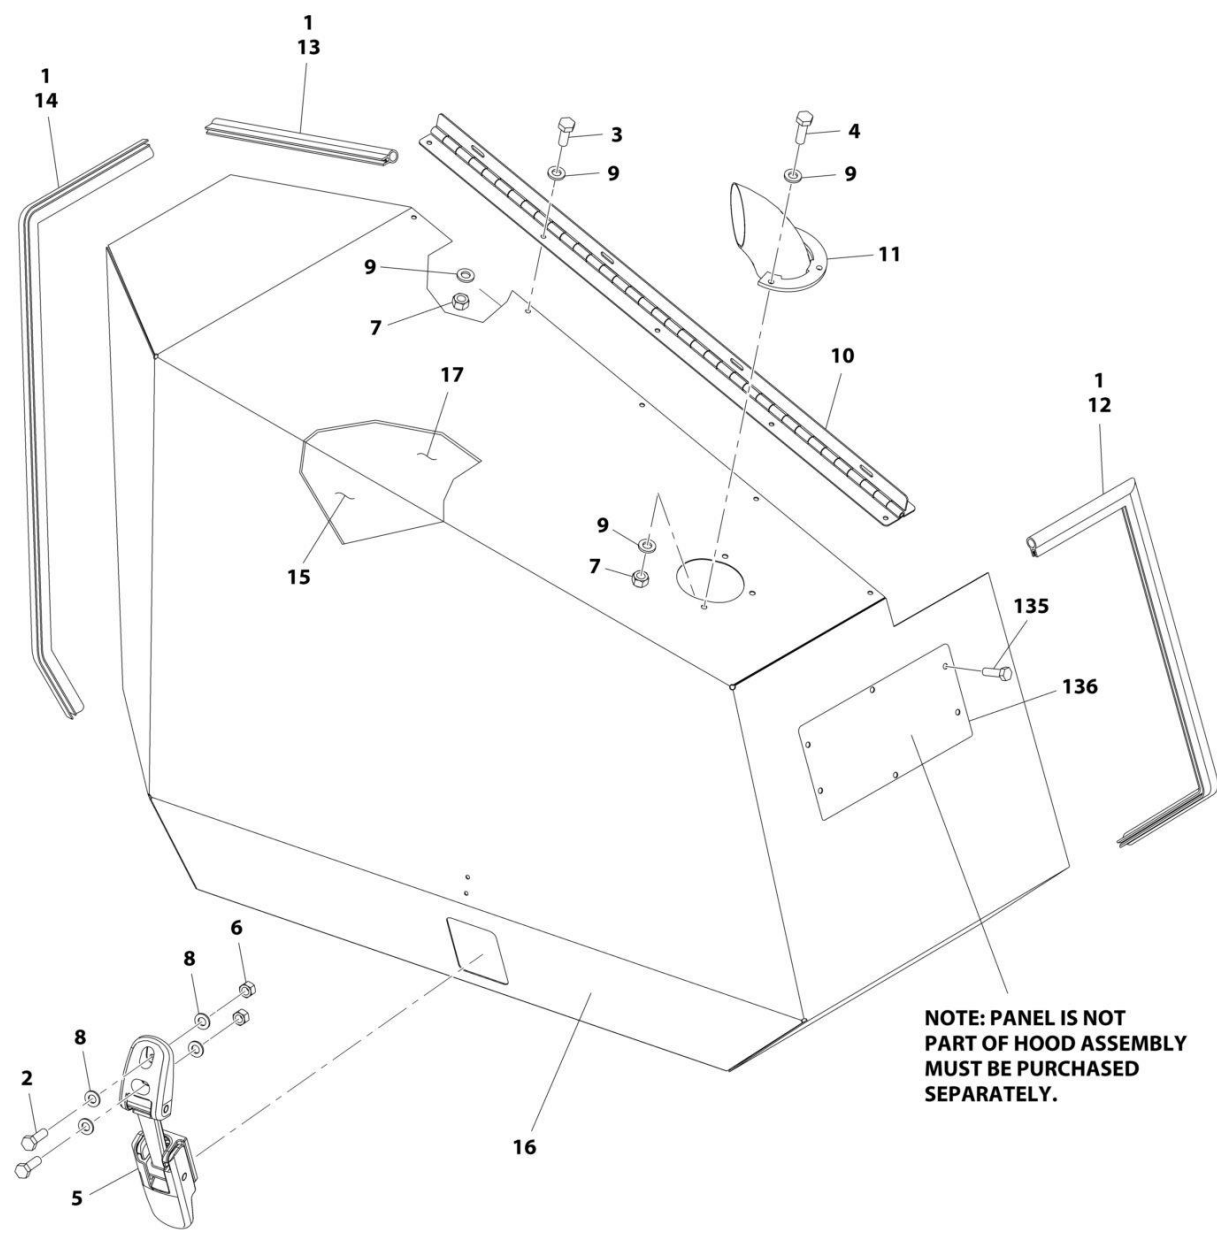

NOTE: REPLACEMENT DECALS MUST BE ORDERED SEPERATELY - SEE DECALS SECTION FOR BREAKDOWN

ART_1001147441

SECTION 2 - TURNTABLE


FIGURE 2-23. HOOD ASSEMBLY - ENGINE SIDE

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001147441	Ref	HOOD ASSEMBLY - ENGINE SIDE	A
1	0100081	AR	Adhesive	
2	0760508	2	Bolt M5 x 16	
3	0760608	5	Bolt M6 x 16	
4	0760610	3	Bolt M6 x 20	
5	2940109	1	Latch	
6	3290505	2	Nut M5	
7	3290605	8	Nut M6	
8	4811600	4	Washer M5	
9	4811700	16	Washer M6	
10	1001117281	1	Hinge	
11	1001119077	1	Pipe, Exhaust	
12	1001119086	1	Seal	
13	1001119087	1	Seal	
14	1001119088	1	Seal	
15	1001120749	1	Insulate, Heat Shield	
16	See Note	1	Hood, Replacement (Note: Use p/n 1001147441)	
17	1001147440	1	Insulate, Heat Shield	
135	2080040	10	Fastener, Huck	
136	1001137451	1	Panel (Note: Not Part of Hood Assembly. Must be Purchased separately)	


SECTION 3 - ENGINE

SECTION 3 - ENGINE

FIGURE 3-1. KUBOTA ENGINE INSTALLATION

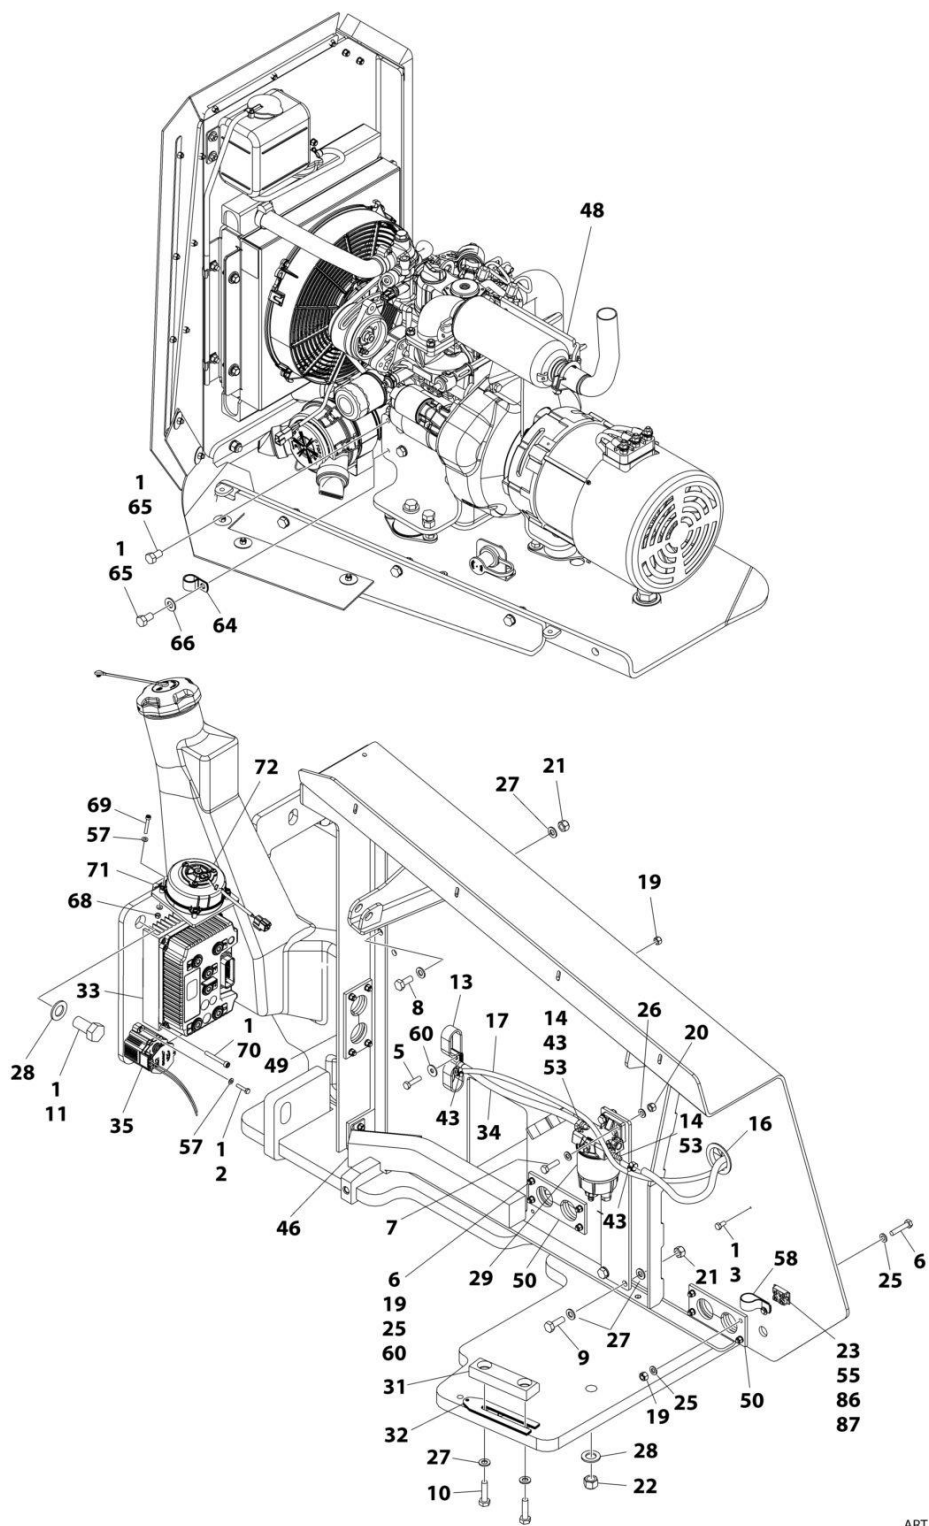

ART_1001168098_1OF3

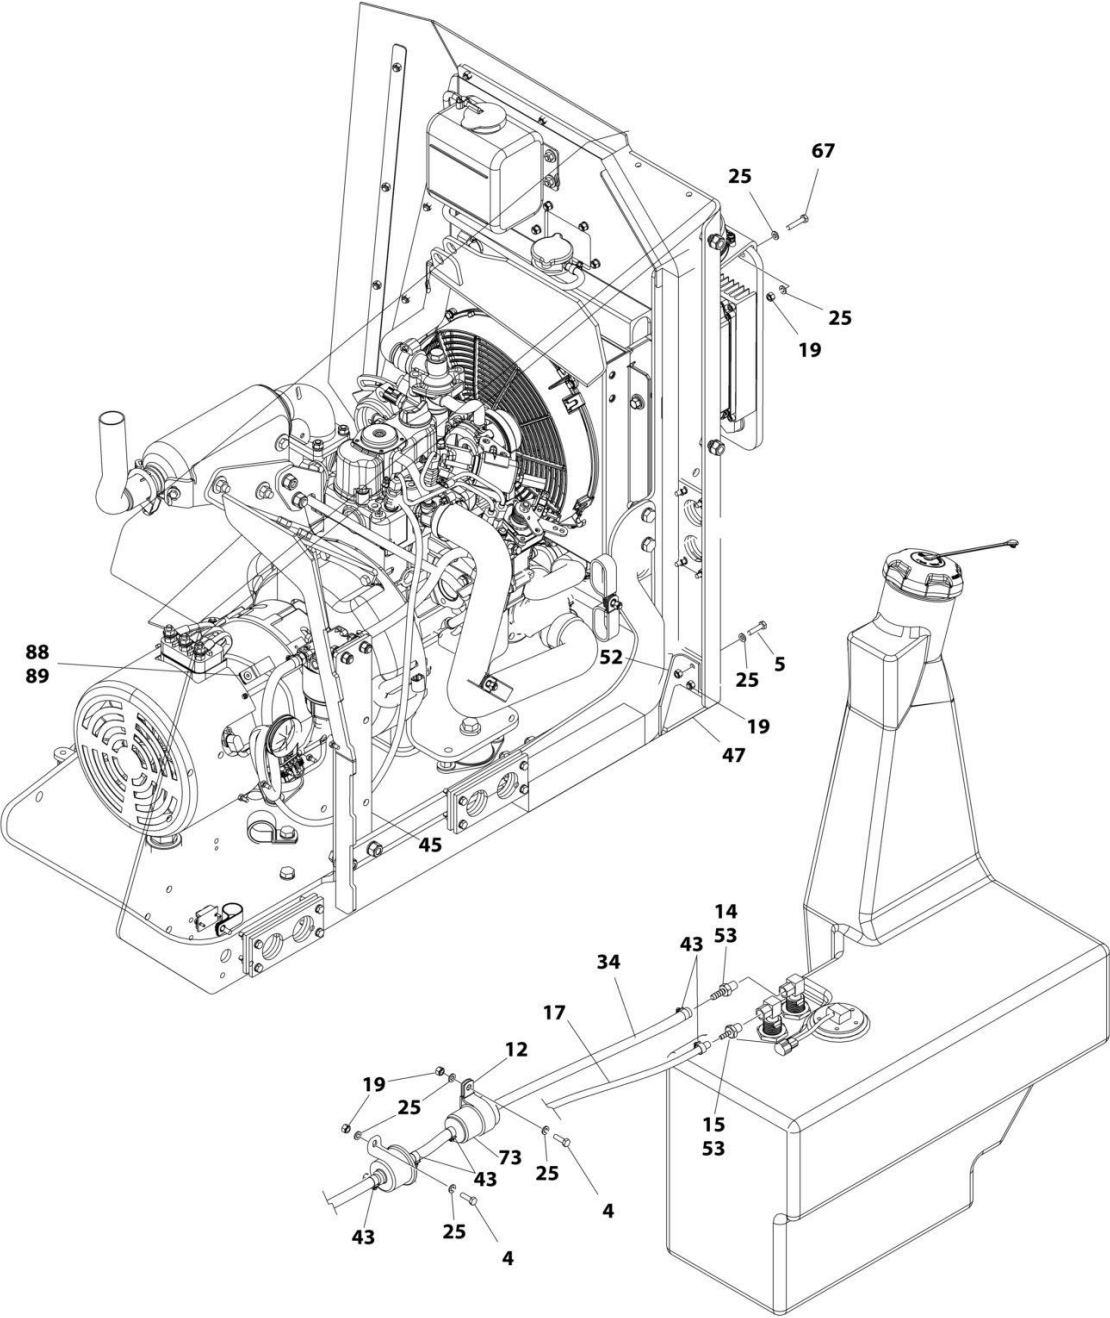

ART_1001168098_2OF3

SECTION 3 - ENGINE

FIGURE 3-1. KUBOTA ENGINE INSTALLATION


ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001168098	Ref	KUBOTA ENGINE INSTALLATION	K
1	0100011	AR	Compound, Locking	
2	0760410	2	Bolt M4 x 20	
3	0760505	5	Bolt M5 x 10	
4	0760610	3	Bolt M6 x 20	
5	0760612	4	Bolt M6 x 25	
6	0760614	12	Bolt M6 x 30	
7	0760814	2	Bolt M8 x 30	
8	0761012	2	Bolt M10 x 25	
9	0761014	2	Bolt M10 x 30	
10	0761016	2	Bolt M10 x 40	
11	0762016	2	Bolt M20 x 40	
12	1320265	1	Clamp	
13	1321716	4	Clamp, Double	
14	2180348	3	Fitting NPT X BARB	
15	2180666	1	Fitting NPT X BARB	
16	2540045	1	Grommet	
17	2720271	70 in/1.6m	Hose	
19	3290605	21	Nut M6	
20	3290805	2	Nut M8	
21	3291005	4	Nut M10	
22	3291605	1	Nut M16	
23	0760306	2	Capscrew M3 x 12	
25	4811700	38	Washer M6	
26	4811900	4	Washer M8	
27	4812000	8	Washer M10	
28	4812500	3	Washer M20	
29	1001190609	1	Fuel Filter/Water Separator Assembly	
29	70005293	1	Head, Mounting	
29	70005294	1	Plug, Vent	
29	70005296	1	Element & Gasket Kit (Includes Element, Head Gasket & Bowl O-Ring)	
29	70005295	1	Gasket, Head	
29	70005297	1	O-Ring, Bowl	
29	70002901	1	Bowl Kit - Water Separator (Includes Bowl, Drain & Plug)	
29	70004070	1	Drain, Self-Vented	
29	70004069	1	Plug, Drain	
31	1001120087	1	Pad, Wear	
32	1001120090	AR	Shim M1.5	
33	1001155934	1	Controller, Generator	
34	2720058	45 in/1.2m	Hose	
35	1001159665	1	Relay, Contactor	
42	1001168237	1	Plate, Mounting	
43	1320022	10	Clamp	
45	1001168236	1	Plate, Mounting	
46	1001168242	1	Seal, Foam	
47	1001168240	1	Shield, Rubber	
48	1001238241	1	Engine and Generator Assembly (See Separate Breakdown in this Section)	

SECTION 3 - ENGINE

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
49	1001168239	1	Bracket, Mounting	
50	1001168244	6	Shield, Cable	
52	1001168241	1	Bracket, Mounting	
53	0100020	AR	Sealant	
54	4240018	AR	Tie-Strap (Not Shown)	
55	1001159754	1	Module, Diode	
57	4811400	10	Washer M4	
58	1320130	1	Clamp	
60	4811702	2	Washer M6	
61	0100083	1	Grease, Terminal	
64	91043147	1	Support	
65	0641605	2	Bolt 3/8-16 x 5/8	
66	4711600	1	Washer 3/8	
67	0700614	2	Bolt M6 x 30	
68	3290405	4	Nut M4	
69	4031510	4	Capscrew M4 x 30	
70	4031714	4	Capscrew M6 x 50	
71	1001189105	1	Bracket	
72	1001189108	1	Fan, Controller Cooling	
73	1001190545	1	Strainer, Fuel	
86	3290301	2	Nut M3	
87	1001110544	2	Washer M3	
88	8406201	1	Clip	
89	1001091102	1	Washer M4	

SECTION 3 - ENGINE

FIGURE 3-2. KUBOTA ENGINE AND GENERATOR SUB-ASSEMBLY

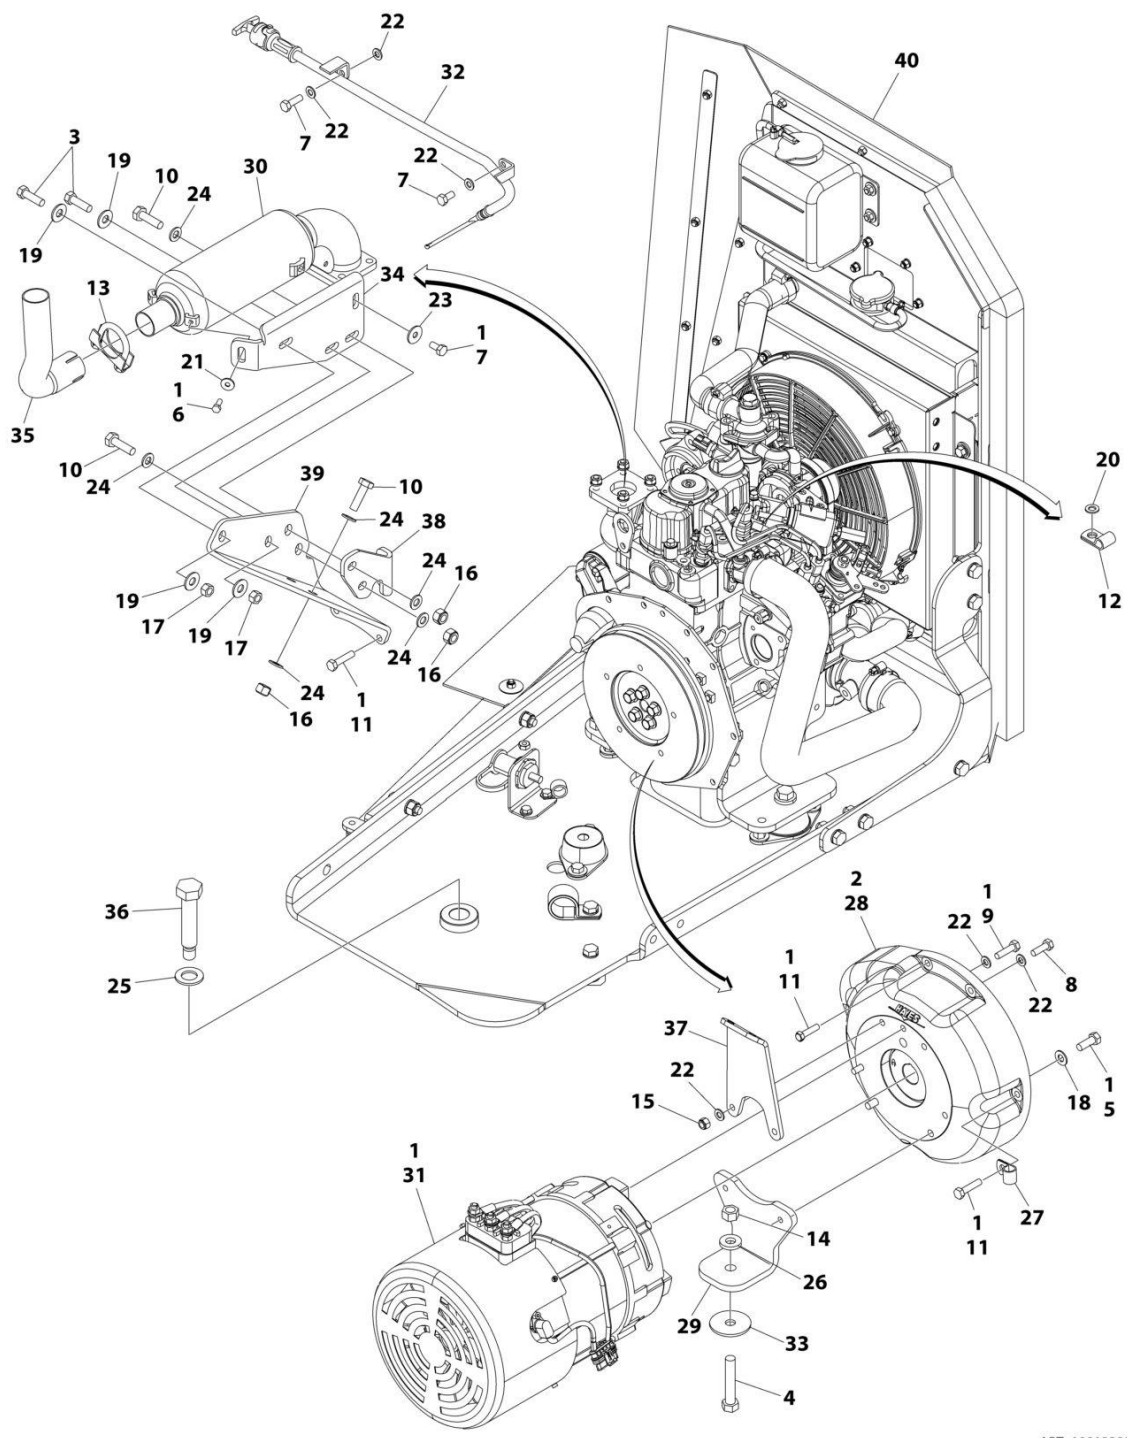

ART_1001238241


SECTION 3 - ENGINE

FIGURE 3-2. KUBOTA ENGINE AND GENERATOR SUB-ASSEMBLY


ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001238241	Ref	KUBOTA ENGINE AND GENERATOR SUB-ASSEMBLY	C
1	0100011	AR	Compound, Locking	
2	0100019	AR	Compound, Locking (Not Shown)	
3	0641610	2	Bolt 3/8 x 1-1/4	
4	0641822	1	Bolt 1/2 x 2-3/4	
5	0681608	2	Bolt 3/8 x 1 (Grade 8)	
6	0760608	1	Bolt M6 x 16	
7	0760808	2	Bolt M8 x 16	
8	0760812	4	Bolt M8 x 25	
9	0760814	2	Bolt M8 x 30	
10	0761015	4	Bolt M10 x 35	
11	0770815	3	Bolt M8 x 35 Grade 10.5	
12	1320136	1	Clamp	
13	1320274	1	Clamp	
14	3271801	1	Nut 1/2-13	
15	3290805	2	Nut M8	
16	3291005	4	Nut M10	
17	3311605	2	Nut 3/8	
18	4711600	2	Washer 3/8	
19	4751600	4	Washer 3/8	
20	4811600	1	Washer M5	
21	4811702	1	Washer M6	
22	4811900	10	Washer M8	
23	4811902	1	Washer M8	
24	4812000	8	Washer M10	
25	4812500	1	Washer M20	
26	4891800	1	Washer 1/2	
27	85941016	1	Clamp	
28	1001157406	1	Engine Coupling Assembly (See Separate Breakdown in this Section)	
29	1001157903	1	Mount, Rear Engine	
30	1001162823	1	Muffler, Standard	
31	1001165751	1	Generator Assembly (See Separate Breakdown in this Section)	
32	1001167516	1	Dipstick	
33	1001168018	1	Washer	
34	1001168232	1	Bracket	
35	1001168233	1	Pipe, Exhaust	
36	1001176304	1	Bolt 2 x 80	
37	1001189794	1	Bracket	
38	1001189795	1	Bracket	
39	1001189868	1	Bracket	
40	1001238239	1	Engine Assembly without Generator (See Separate Breakdown in this Section)	

SECTION 3 - ENGINE

FIGURE 3-3. KUBOTA ENGINE ASSEMBLY

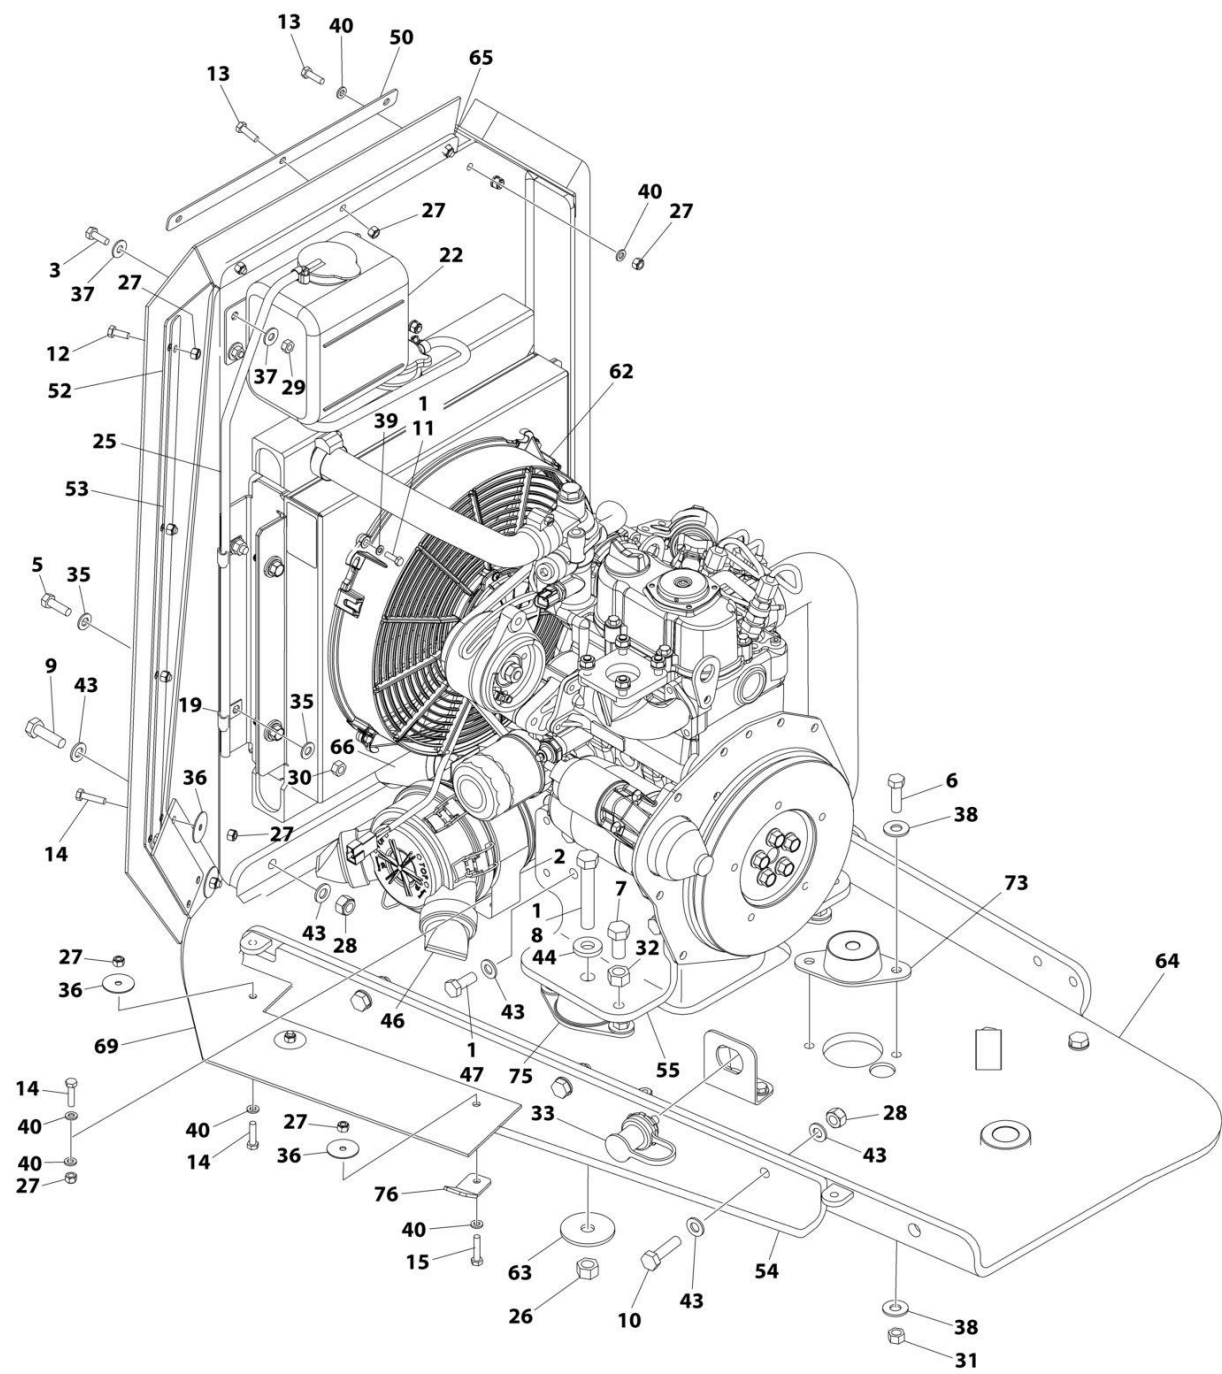

ART_1001238239_1OF2

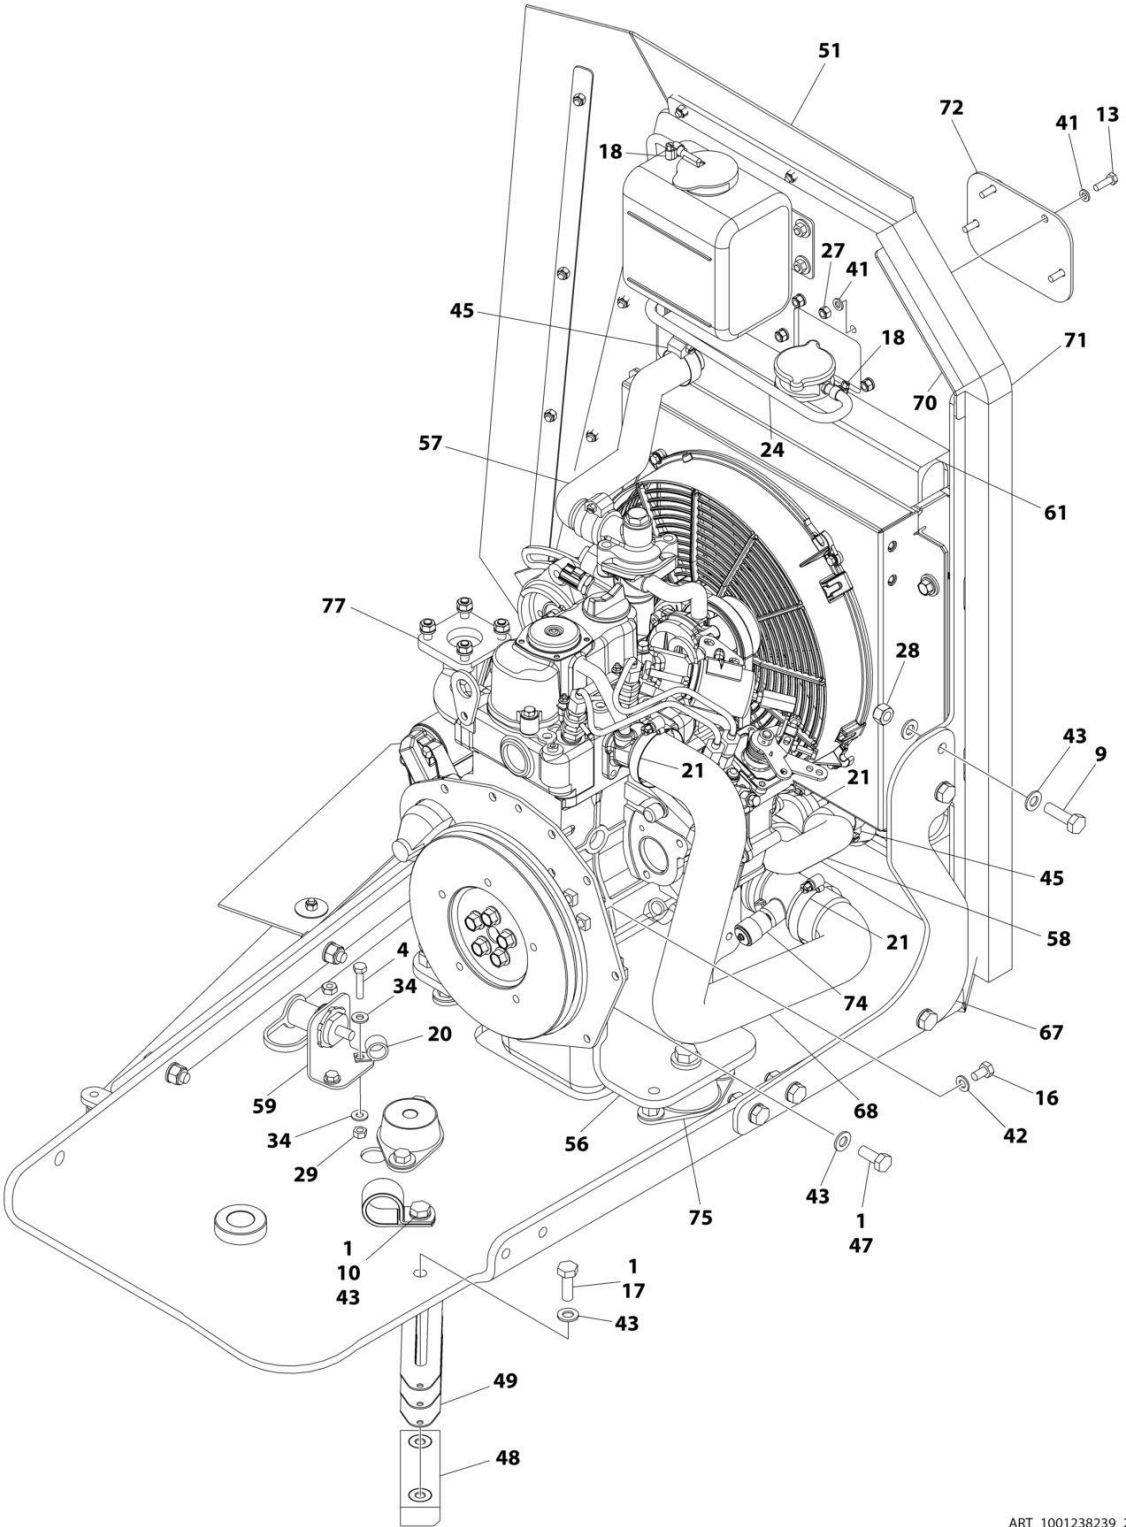

ART_1001238239_2OF2

SECTION 3 - ENGINE

FIGURE 3-3. KUBOTA ENGINE ASSEMBLY


ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001238239	Ref	KUBOTA ENGINE ASSEMBLY	C
1	0100011	AR	Compound, Locking	
2	0340045	1	Band, Mounting	
3	0641406	4	Bolt 1/4-20 x 3/4	
4	0641410	2	Bolt 1/4-20 x 1-1/4	
5	0641508	4	Bolt 5/16-18 x 1	
6	0641610	6	Bolt 3/8-16 x 1-1/4	
7	0641808	1	Bolt 1/2-13 x 1	
8	0641824	2	Bolt 1/2-13 x 3	
9	0701015	5	Bolt M10 x 35	
10	0701016	4	Bolt M10 x 40	
11	0760508	4	Bolt M5 x 16	
12	0760608	5	Bolt M6 x 16	
13	0760610	12	Bolt M6 x 20	
14	0760612	5	Bolt M6 x 25	
15	0760613	2	Bolt M6 x 28	
16	0760807	2	Bolt M8 x 14	
17	0761014	1	Bolt M10 x 30	
18	1320022	3	Clamp	
19	1320222	2	Clamp	
20	1320224	1	Clamp	
21	1321682	3	Clamp	
22	1580011	1	Tank, Overflow	
24	2720058	20 in/ 51cm	Hose	
25	2720271	29 in/ 74cm	Hose	
26	3271801	2	Nut 1/2-13	
27	3290605	24	Nut M6	
28	3291005	10	Nut M10	
29	3311405	6	Nut 1/4-20	
30	3311501	4	Nut 5/16-18	
31	3311605	6	Nut 3/8-16	
32	3311801	1	Nut 1/2-13	
33	4460611	1	Terminal, Battery	
34	4711400	4	Washer 1/4	
35	4711500	8	Washer 5/16	
36	4740362	5	Washer 1/4	
37	4751400	8	Washer 1/4	
38	4751600	12	Washer 3/8	
39	4811600	4	Washer M5	
40	4811700	11	Washer M6	
41	4811702	8	Washer M8	
42	4811900	2	Washer M8	
43	4812000	30	Washer M10	
44	4891800	2	Washer 1/2	
45	8405102	4	Clamp	
46	1001118280	1	Air Filter Assembly	
46	7015004	1	Element, Air Filter	
46	1340069	1	Valve, Vacuum	

SECTION 3 - ENGINE

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
46	7015005	1	Cover	
47	1001118746	8	Bolt M10 x 25	
48	1001120087	1	Pad, Wear	
49	1001120090	3	Shim M1.5	
50	1001123018	1	Plate, Support	
51	1001147365	1	Seal	
52	1001147642	1	Plate, Support	
53	1001147643	1	Plate, Support	
54	1001148975	1	Plate	
55	1001156603	1	Bracket, Engine Mounting (LH)	
56	1001156604	1	Bracket, Engine Mounting (RH)	
57	1001158075	1	Hose, Radiator (Top)	
58	1001158076	1	Hose, Radiator (Bottom)	
59	1001158314	1	Mount, Battery Post	
61	1001159664	1	Radiator	
61	70004796	1	Cap, Radiator	
62	1001163363	1	Fan	
63	1001168018	2	Washer	
64	1001168222	1	Tray	
65	1001168224	1	Mount, Radiator	
66	1001168225	1	Hose	
67	1001168226	1	Gusset	
68	1001168227	1	Hose	
69	1001168228	1	Shield, Rubber	
70	1001168229	1	Bracket	
71	1001168230	1	Seal	
72	1001168238	1	Plate	
73	1001170571	1	Mount, Motor	
74	1001170981	1	Indicator, Air Intake Restriction	
75	1001187235	2	Mount, Motor	
76	1001202223	2	Bracket	
77	1001238238	1	Engine, Kubota (See Separate Breakdown in this Section)	

SECTION 3 - ENGINE

FIGURE 3-4. KUBOTA ENGINE COMPONENTS

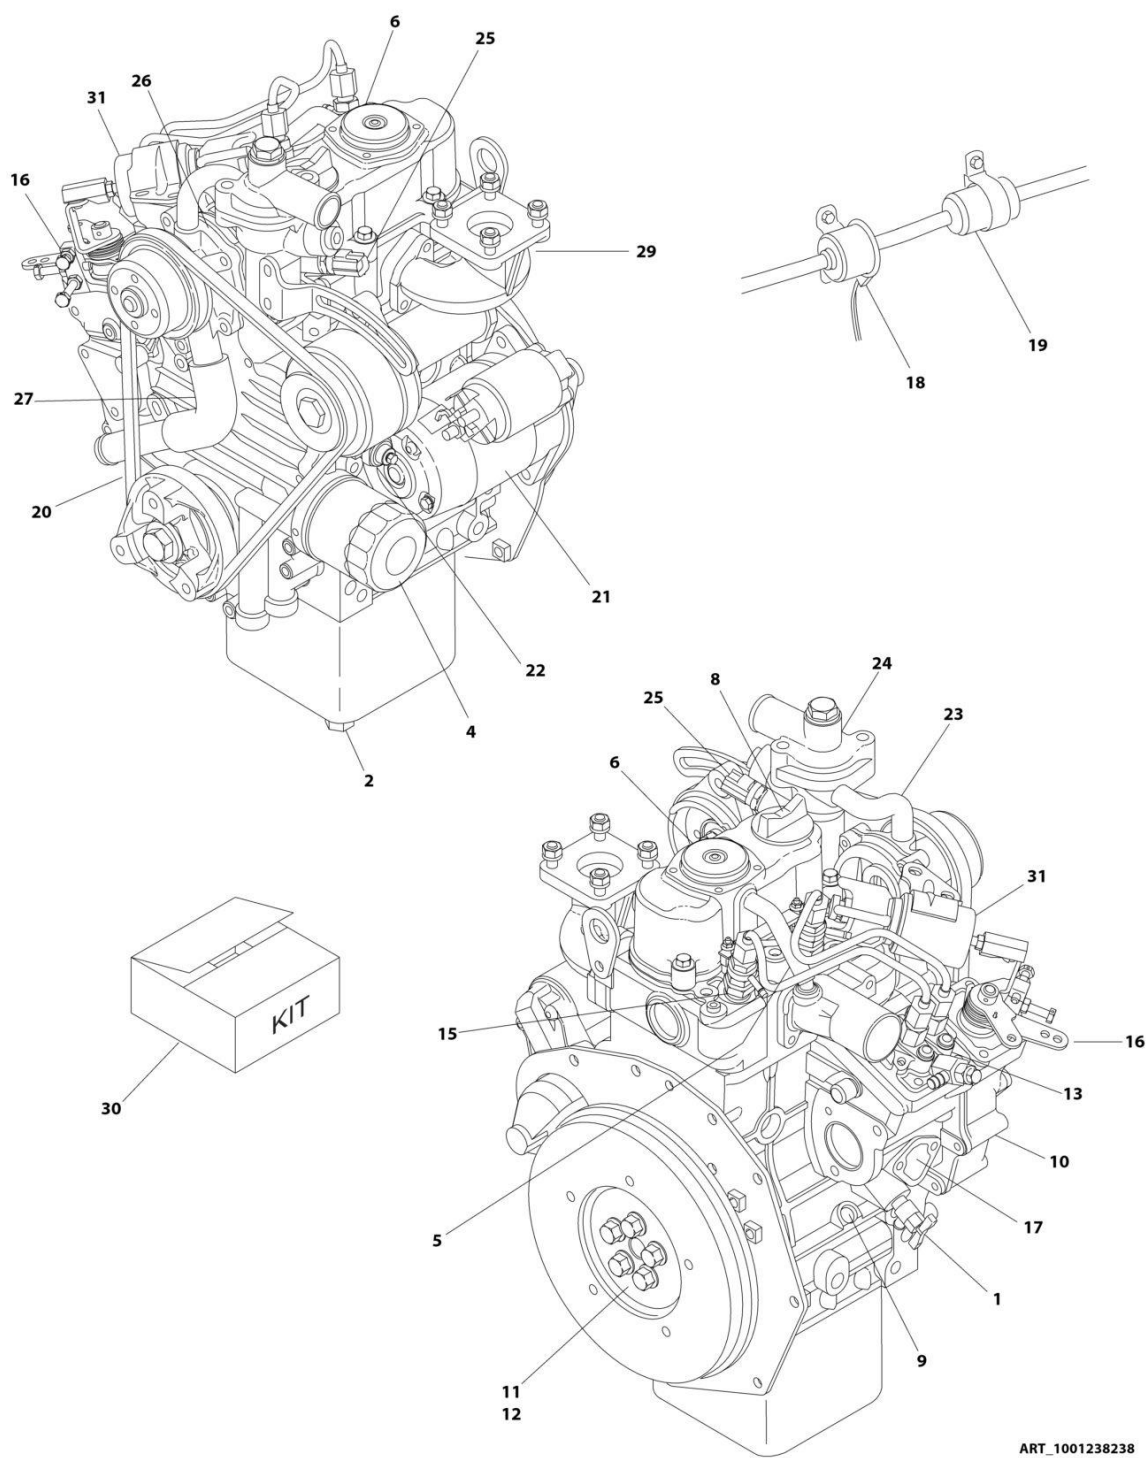

ART_1001238238

FIGURE 3-4. KUBOTA ENGINE COMPONENTS


ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001238238	Ref	KUBOTA ENGINE COMPONENTS	A
1	70004524	1	Valve, Drain	
2	7023154	1	Plug, Drain	
2	70002315	1	Gasket, Oil Pan Drain	
3	70004828	1	Gasket, Cylinder Head (Not Shown)	
4	7017980	1	Filter, Oil	
4	7017914	1	Fitting, Oil Filter	
5	70004829	1	Pipe (Inserts into Valve Cover)	
5	70004832	1	Tube, Breather	
5	70004855	1	Pipe (Inserts into Inlet Manifold)	
6	70003060	1	Valve, Breather Compensation	
6	70003061	1	Cover, Breather	
6	7017934	4	Screw	
7	70004830	1	Gasket, Cylinder Head (Not Shown)	
8	70002318	1	Cap, Oil Fill	
8	70004311	1	O-Ring, Oil Filler Cap	
9	1001167516	1	Dipstick	
10	70004294	1	Pump, Oil	
10	70004295	1	Gasket, Oil Pump	
10	70004296	1	Key, Oil Pump Shaft	
11	7017982	1	Gasket, Rear Bearing Case	
11	7017983	1	Seal, Rear Main	
11	7017984	1	Gasket, Rear Case	
12	70004833	1	Flywheel Assembly (Includes Ring Gear)	
12	70004297	1	Ring Gear	
12	70004834	5	Bolt, Flywheel	
13	70004836	1	Injection Pump Assembly	
13	70004837	AR	Shim .175mm	
13	70004838	AR	Shim .200mm	
13	70004839	AR	Shim .250mm	
13	70004840	AR	Shim .300mm	
13	70004841	AR	Shim .350mm	
14	7017988	1	Gasket, Speed Control Plate (Not Shown)	
15	70004540	2	Nut	
15	7023167	2	Gasket, Nozzle	
15	7023168	2	Seal, Nozzle Heat	
15	70004539	1	Pipe, Overflow (Includes Clips)	
15	70004537	1	Screw, Air Bleeder	
15	70004538	1	Gasket, Bleeder Screw	
15	70004398	2	Glow Plug	
16	70004843	1	Spring, Start	
16	70004844	1	Spring	
16	70004846	1	Spring, Governor	
16	70004847	1	Fork Assembly	
17	70004849	1	Pump, Fuel	
17	7017995	1	Gasket, Fuel Pump	
17	70004848	2	Bolt, Fuel Pump	
18	70005228	1	Pump, Electric Fuel	
19	7017992	1	Filter, Inline Fuel	
20	7023107	1	V-Belt	

SECTION 3 - ENGINE

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
21	70006008	1	Starter	
21	70004305	1	Switch, Starter	
22	7017901	1	Switch, Oil	
23	70004829	1	Pipe, Water Return (Short)	
23	70004851	1	Pipe, Water Return (Long)	
24	70004852	1	Cover, Thermostat/Water Outlet	
24	7023170	1	Thermostat	
24	7023114	1	Gasket, Thermostat	
24	70004306	1	Gasket, Water Flange to Cylinder Head	
25	70003064	1	Sensor, Water Temperature	
25	70003063	1	Seal, Water Temperature Sensor	
26	70004853	1	Pump, Water	
26	70004854	1	Gasket, Water Pump to Block	
27	70004912	1	Hose	
27	70004913	2	Clamp, Band	
28	70004856	1	Gasket, Inlet Manifold (Not Shown)	
29	7023124	1	Gasket, Exhaust Manifold to Muffler	
29	70004859	4	Stud (Manifold to Muffler)	
29	70004857	1	Gasket, Exhaust (Manifold to Cylinder Head)	
29	70004858	4	Stud (Manifold to Cylinder Head)	
30	70004860	1	Gasket Kit - Upper	
30	70004861	1	Gasket Kit - Lower	
31	70006007	1	Solenoid, Stop	

SECTION 3 - ENGINE

FIGURE 3-5. ENGINE COUPLING ASSEMBLY

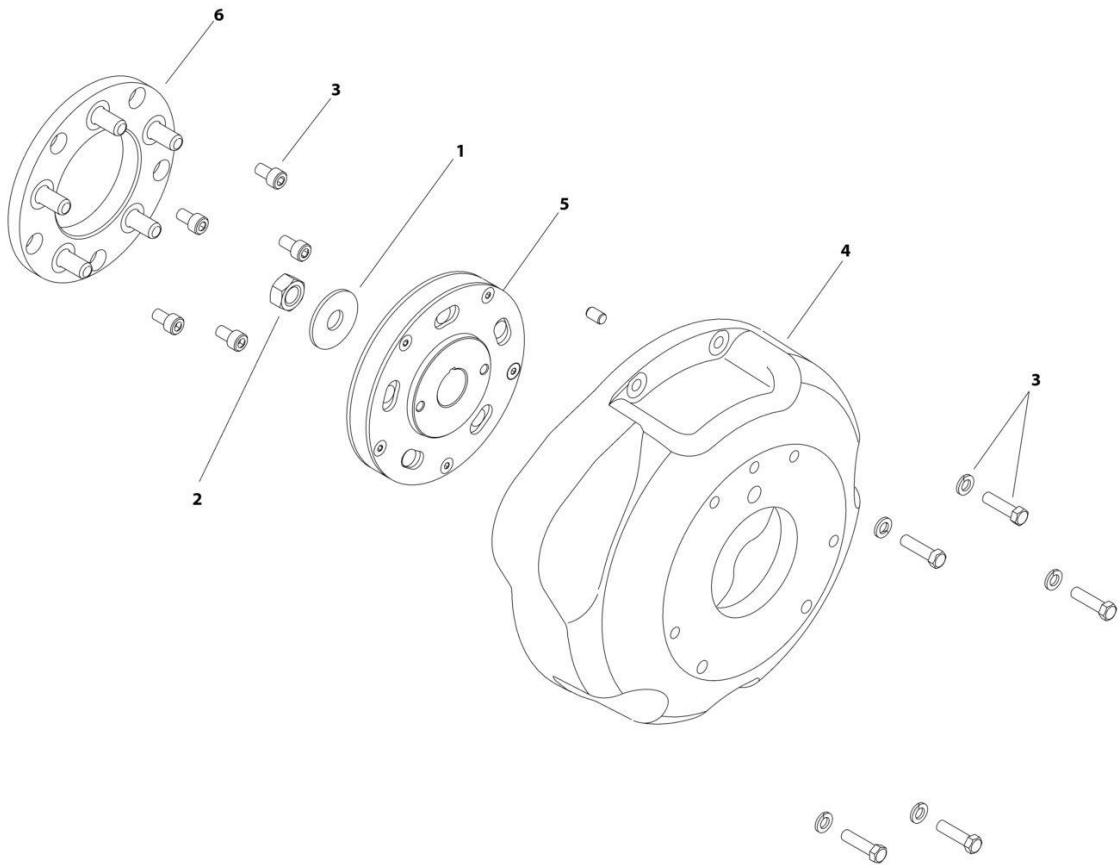


ART_1001157406

FIGURE 3-5. ENGINE COUPLING ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001157406	Ref	ENGINE COUPLING ASSEMBLY	B
1	See Note	1	Washer M14 (Note: Not Available - Purchase Locally)	
2	See Note	1	Nut M14 (Note: Not Available - Purchase Locally)	
3	70004790	1	Bolt Kit (Includes qty 5 each of M8 Lockwashers, 16mm Length Capscrews & 30mm Length Capscrews)	
4	70004791	1	Cover, Coupling	
5	70004792	1	Hub Coupling Assembly	
6	70004793	1	Plate, Mounting	

SECTION 3 - ENGINE

FIGURE 3-6. GENERATOR ASSEMBLY

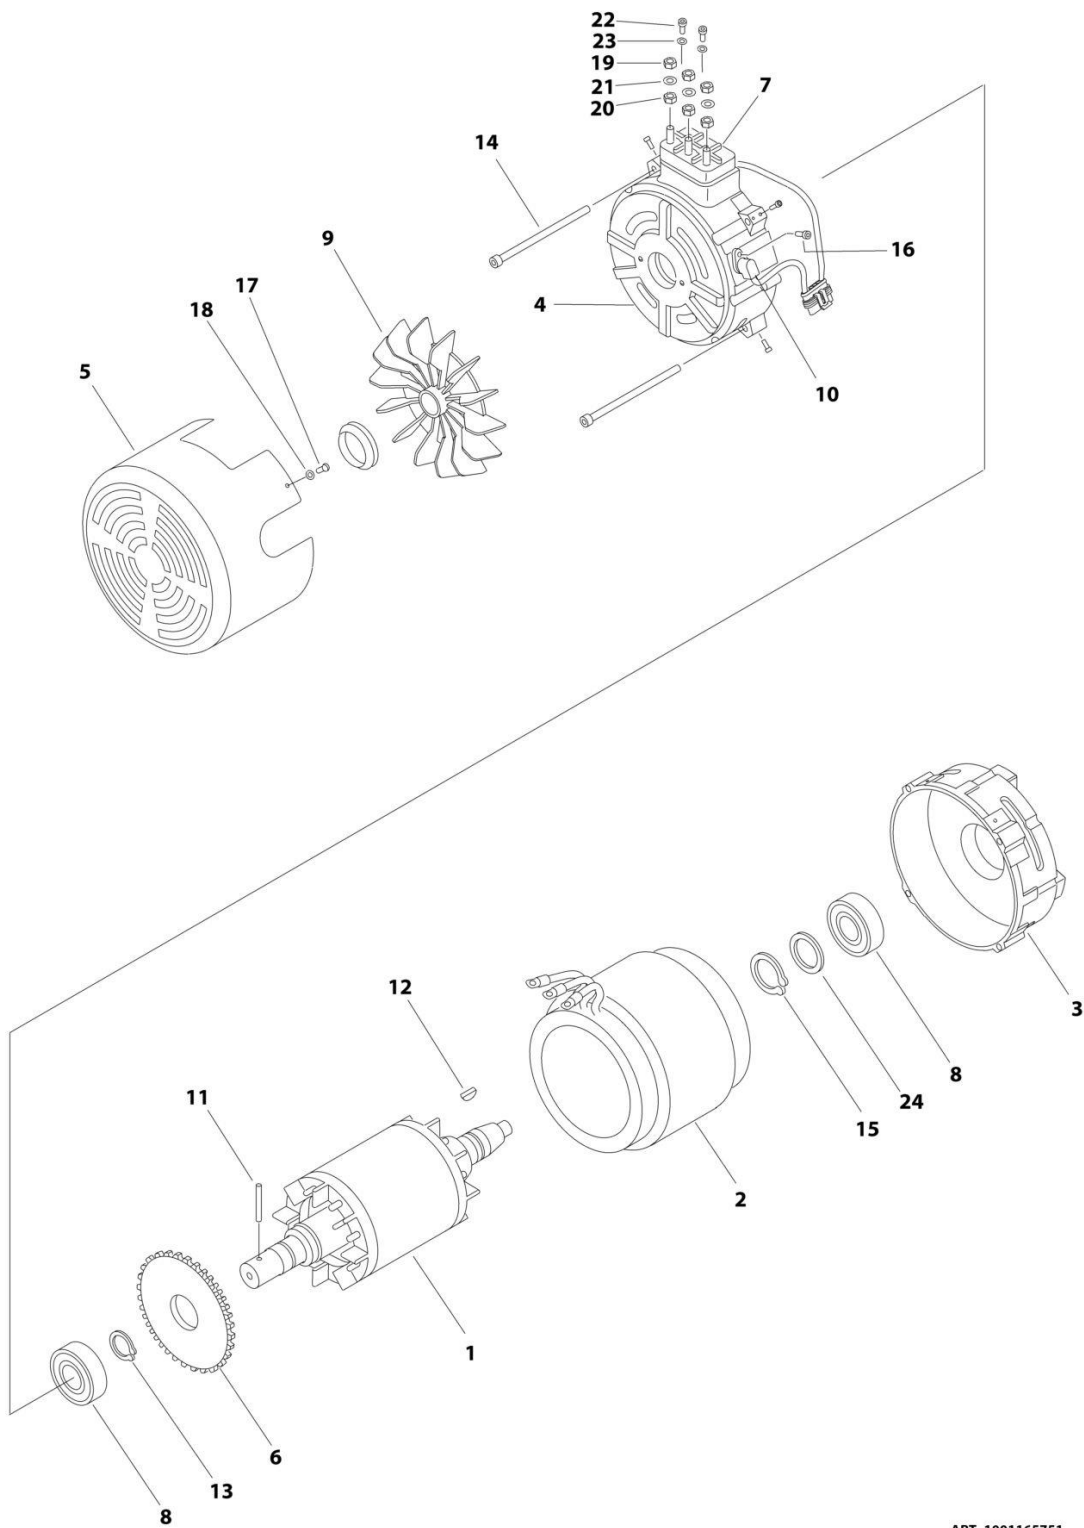


ART_1001165751

FIGURE 3-6. GENERATOR ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001165751	Ref	GENERATOR ASSEMBLY	C
1	70004984	1	Rotor	
2	70004985	1	Stator	
3	70004986	1	Flange	
4	70004987	1	Flange	
5	70004988	1	Cover, Fan	
6	70004989	1	Wheel, Impulse	
7	70004990	1	Block, Terminal	
8	70004991	1	Bearing	
9	70004992	1	Fan with Lock Ring	
10	70004993	1	Sensor	
11	70004994	1	Rollpin	
12	70004995	1	Key	
13	70004996	1	Ring, Retaining	
14	70004997	4	Screw M8 x 150	
15	70004998	1	Ring, Retaining	
16	70004999	1	Screw M6 x 16	
17	70005000	4	Screw M5 x 8	
18	70005001	4	Washer M5	
19	70005002	3	Nut M8	
20	70005003	3	Nut M8	
21	70005004	3	Spacer	
22	70005005	2	Screw M8 x 16	
23	70005006	2	Washer	
24	70005007	1	Ring	

SECTION 3 - ENGINE

FIGURE 3-7. CATALYTIC MUFFLER INSTALLATION - OPTIONAL

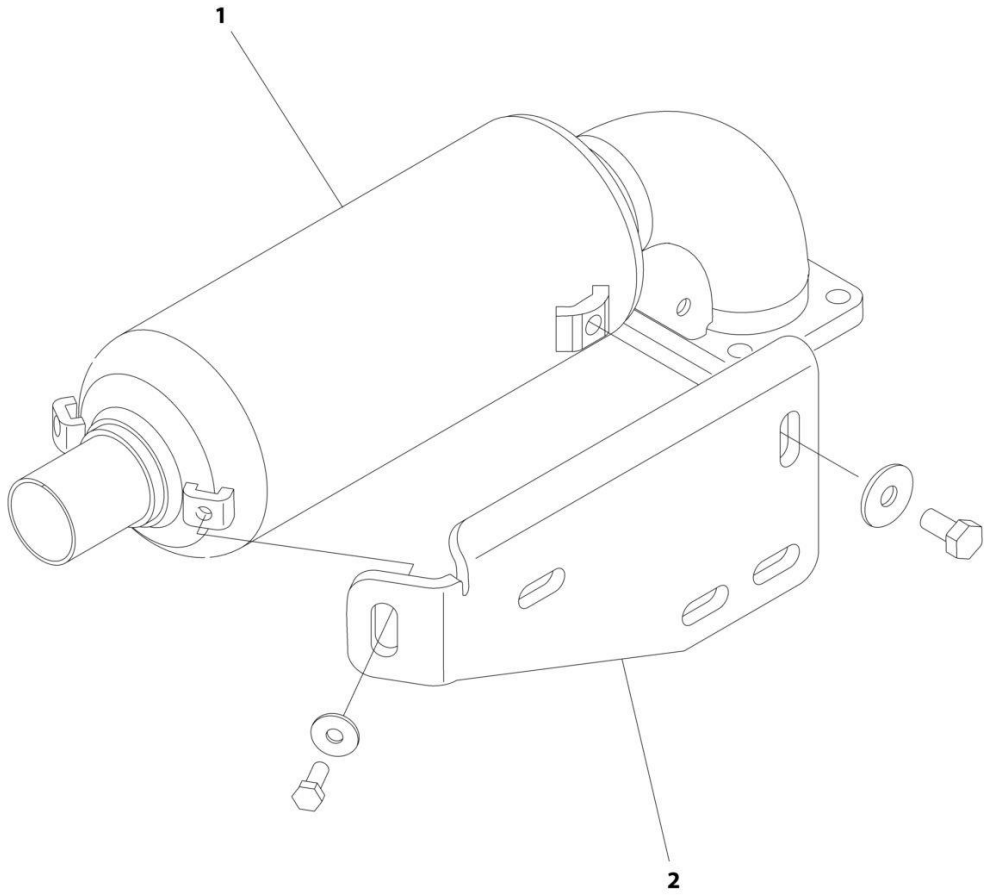

ART_1001169719


FIGURE 3-7. CATALYTIC MUFFLER INSTALLATION - OPTIONAL

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001169719	Ref	CATALYTIC MUFFLER INSTALLATION - OPTIONAL	B
1	1001171823	1	Muffler, Spark Arresting/Catalytic	
2	1001171914	1	Bracket	

SECTION 4 - BOOM

SECTION 4 - BOOM

FIGURE 4-1. BOOM AND CYLINDERS INSTALLATION - WITHOUT ARCTIC PACKAGE

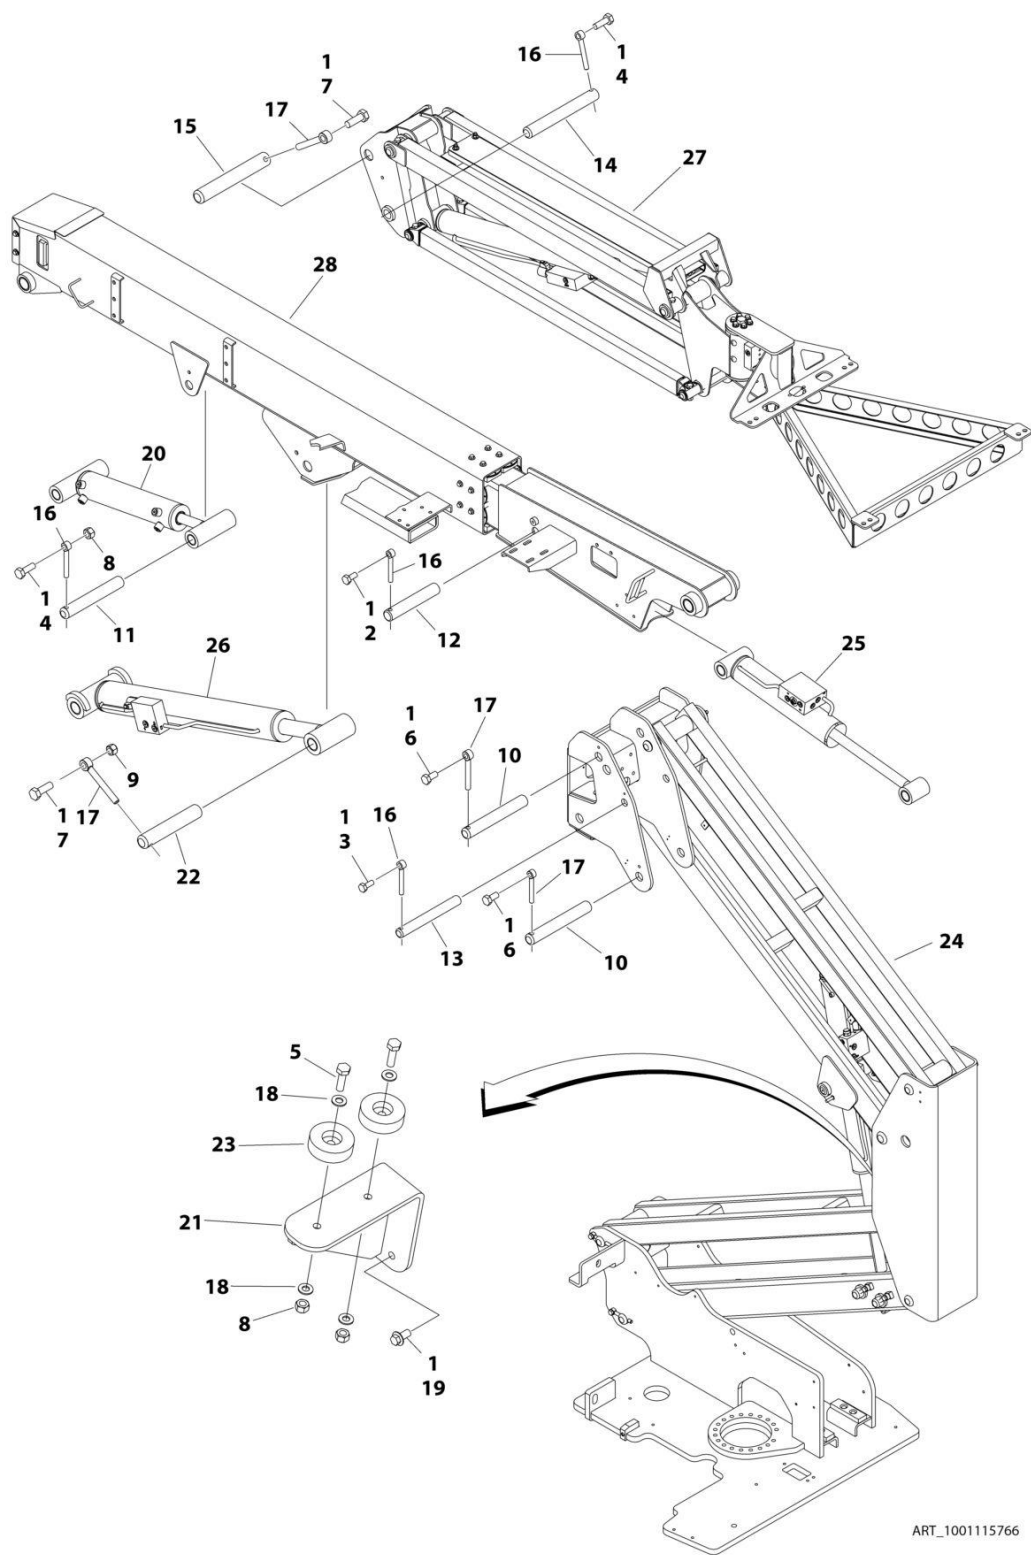


SECTION 4 - BOOM

FIGURE 4-1. BOOM AND CYLINDERS INSTALLATION - WITHOUT ARCTIC PACKAGE

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001115766	Ref	BOOM AND CYLINDERS INSTALLATION - WITHOUT ARCTIC PACKAGE	D
1	0100011	AR	Compound, Locking	
2	0761011	1	Bolt M10 x 22	
3	0761012	1	Bolt M10 x 25	
4	0761014	2	Bolt M10 x 30	
5	0761015	2	Bolt M10 x 35	
6	0761212	2	Bolt M12 x 25	
7	0761215	2	Bolt M12 x 35	
8	3291005	3	Nut M10	
9	3291205	1	Nut M12	
10	3422576	2	Pin	
11	3422582	1	Pin	
12	3422709	1	Pin	
13	3422790	1	Pin	
14	3422792	1	Pin	
15	3422814	1	Pin	
16	3841143	4	Keeper, Pin	
17	3841203	4	Keeper, Pin	
18	4812000	4	Washer M10	
19	5251010	3	Bolt M10 x 20	
20	1001120976	1	Master Cylinder Assembly (See Separate Breakdown in CYLINDER Section)	
21	1001125235	1	Rest, Boom	
22	1001109528	1	Pin	
23	1001112607	2	Pad, Boom Rest	
24	1001115672	1	Tower Boom Assembly (See Separate Breakdown in this Section)	
25	1001225990	1	Level Cylinder Assembly - Platform (Slave) (See Separate Breakdown in CYLINDER Section)	
26	1001117640	1	Lift Cylinder Assembly - Main Boom (See Separate Breakdown in CYLINDER Section)	
27	1001117884	1	Jib Assembly (See Separate Breakdown in this Section)	
28	1001117885	1	Main Boom Assembly (See Separate Breakdown in this Section)	

SECTION 4 - BOOM

FIGURE 4-2. BOOM AND CYLINDERS INSTALLATION - WITH ARCTIC PACKAGE

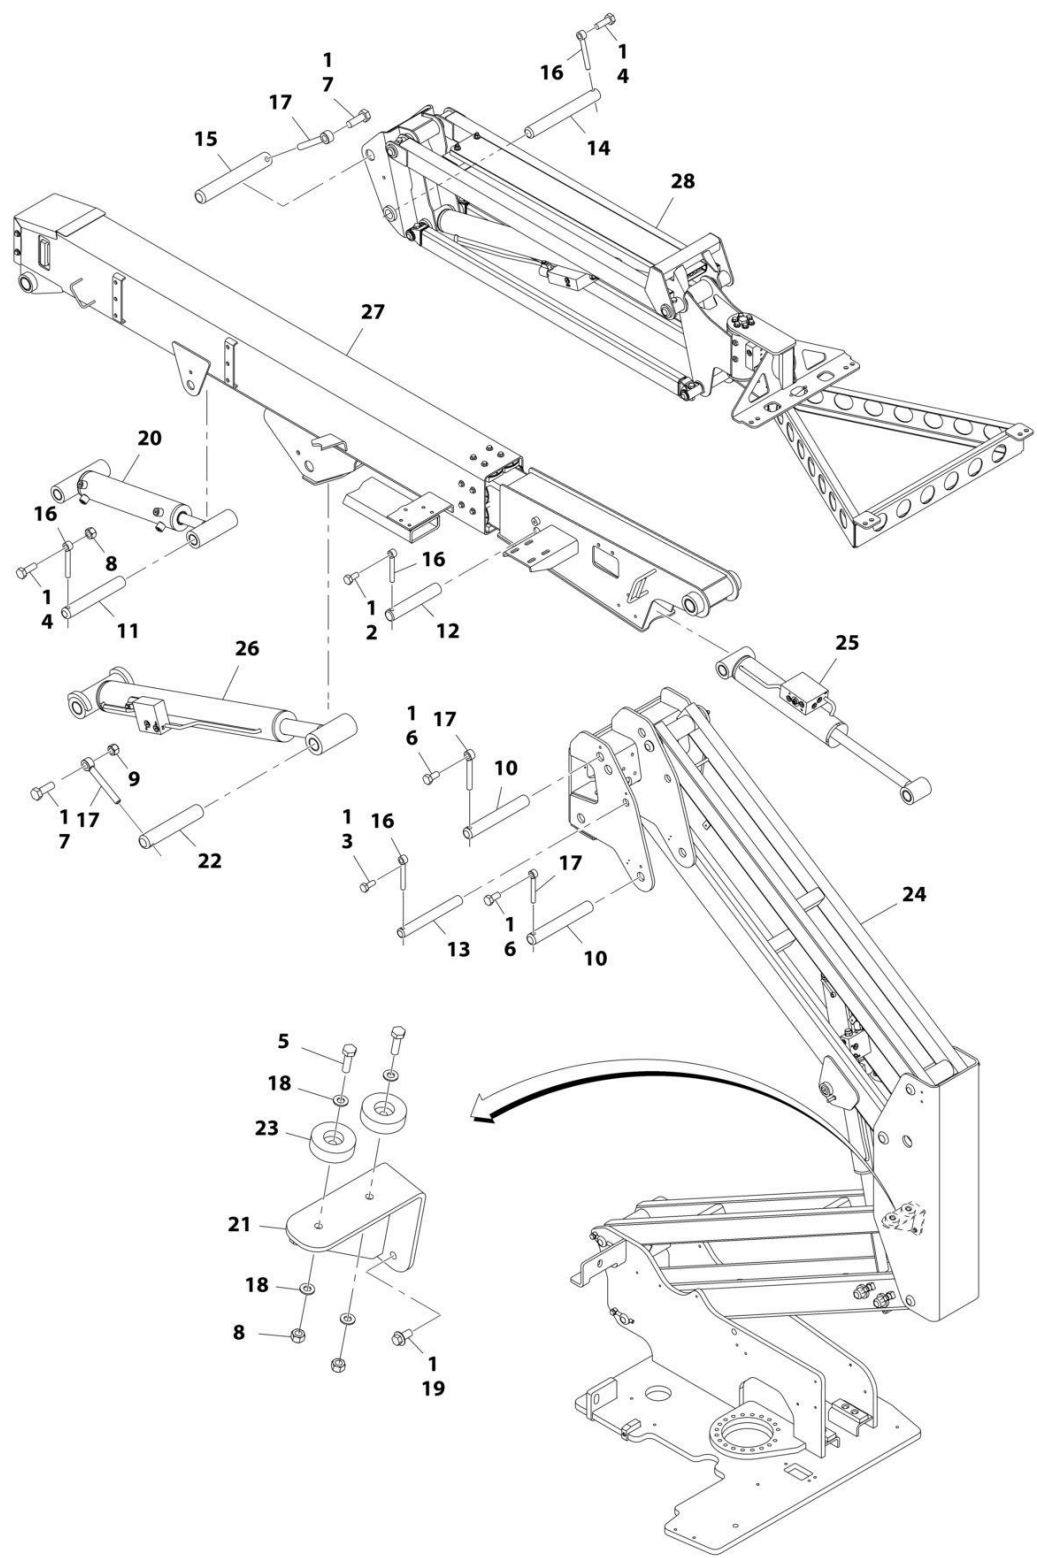

ART_1001119371


SECTION 4 - BOOM

FIGURE 4-2. BOOM AND CYLINDERS INSTALLATION - WITH ARCTIC PACKAGE

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119371	Ref	BOOM AND CYLINDERS INSTALLATION - WITH ARCTIC PACKAGE	D
1	0100011	AR	Compound, Locking	
2	0761011	1	Bolt M10 x 22	
3	0761012	1	Bolt M10 x 25	
4	0761014	2	Bolt M10 x 30	
5	0761015	2	Bolt M10 x 35	
6	0761212	2	Bolt M12 x 25	
7	0761215	2	Bolt M12 x 35	
8	3291005	3	Nut M10	
9	3291205	1	Nut M12	
10	3422576	2	Pin	
11	3422582	1	Pin	
12	3422709	1	Pin	
13	3422790	1	Pin	
14	3422792	1	Pin	
15	3422814	1	Pin	
16	3841143	4	Keeper, Pin	
17	3841203	4	Keeper, Pin	
18	4812000	4	Washer M10	
19	5251010	3	Bolt M10 x 20	
20	1001120976	1	Master Cylinder Assembly (See Separate Breakdown in CYLINDER Section)	
21	1001125235	1	Rest, Boom	
22	1001109528	1	Pin	
23	1001112607	2	Pad, Boom Rest	
24	1001115672	1	Tower Boom Assembly (See Separate Breakdown in this Section)	
25	1001225990	1	Level Cylinder Assembly - Platform (Slave) (See Separate Breakdown in CYLINDER Section)	
26	1001117640	1	Lift Cylinder Assembly - Main Boom (See Separate Breakdown in CYLINDER Section)	
27	1001117885	1	Main Boom Assembly Options (See Separate Breakdown in this Section)	
28	1001119370	1	Jib Assembly (See Separate Breakdown in this Section)	

SECTION 4 - BOOM

FIGURE 4-3. TOWER BOOM ASSEMBLY

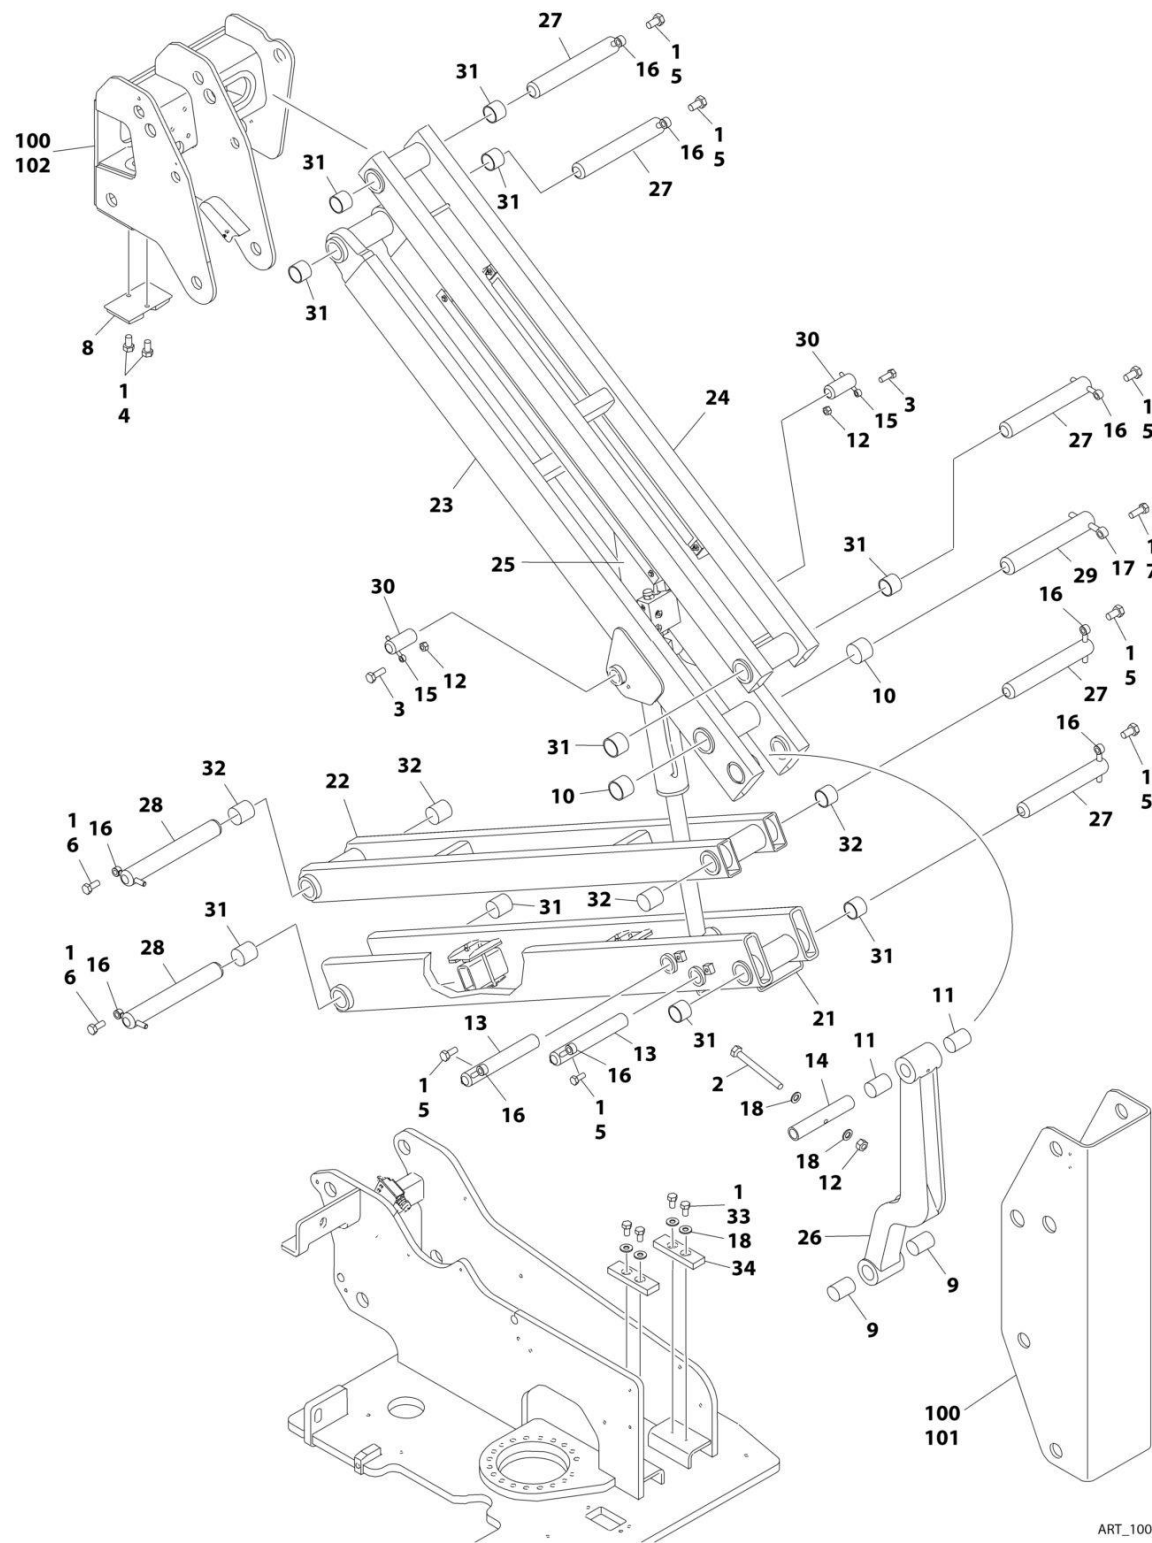


ART_1001115672

FIGURE 4-3. TOWER BOOM ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001115672	Ref	TOWER BOOM ASSEMBLY	D
1	0100011	AR	Compound, Locking	
2	0701027	1	Bolt M10 x 100	
3	0761015	2	Bolt M10 x 35	
4	0761210	2	Bolt M12 x 20	
5	0761212	7	Bolt M12 x 25	
6	0761214	2	Bolt M12 x 30	
7	0761615	2	Bolt M16 x 35	
8	0940048	1	Bumper	
9	0961948	2	Bearing	
10	0962224	2	Bearing	
11	0962259	2	Bearing	
12	3291005	3	Nut M10	
13	3422787	2	Pin	
14	3422788	1	Pin	
15	3841143	2	Keeper, Pin	
16	3841203	9	Keeper, Pin	
17	3841258	1	Keeper, Pin	
18	4812000	6	Washer M10	
21	1001115657	1	Link, Lower Boom (Bottom)	
22	1001115661	1	Link, Lower Boom (Top)	
23	1001115663	1	Link, Mid Boom (Bottom)	
24	1001115669	1	Link, Mid Boom (Top)	
25	1001122527	1	Lift Cylinder Assembly - Tower Boom (See Separate Breakdown in CYLINDER Section)	
26	1001115870	1	Link, Timing	
27	1001116546	5	Pin	
28	1001116547	2	Pin	
29	1001116548	1	Pin	
30	1001116549	2	Pin	
31	1001118665	10	Bearing	
32	1001118666	4	Bearing	
33	0761010	4	Bolt M10 x 20	
34	3340758	2	Pad, Wear	
100	1001231153	1	Lower Upright Boom Kit	
101	1001115649	1	Upright, Lower	
102	1001115650	1	Upright, Upper	

SECTION 4 - BOOM

FIGURE 4-4. MAIN BOOM ASSEMBLY - WITH ARCTIC PACKAGE

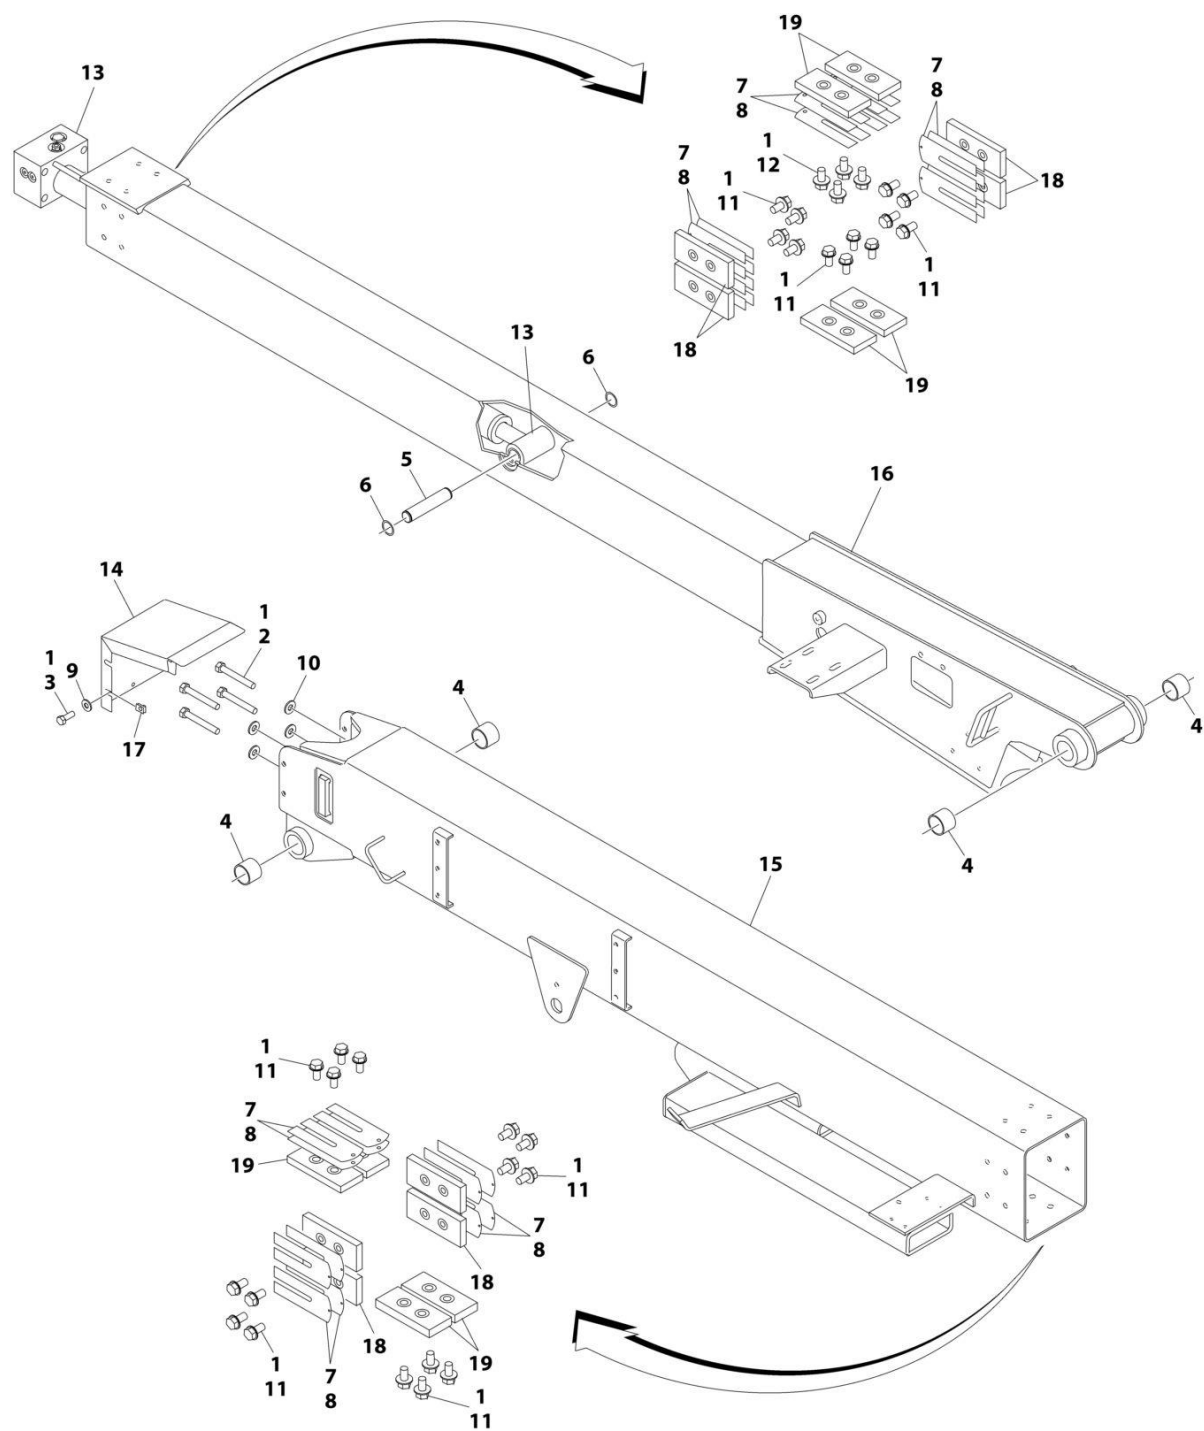

ART_1001199413


SECTION 4 - BOOM

FIGURE 4-4. MAIN BOOM ASSEMBLY - WITH ARCTIC PACKAGE

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001199413	Ref	MAIN BOOM ASSEMBLY	A
1	0100011	AR	Compound, Locking	
2	0711227	4	Bolt M12 x 100 Grade 10.9	
3	0760812	4	Bolt M8 x 25	
4	0961948	4	Bushing	
5	3422745	1	Pin	
6	3760115	2	Ring, Retaining	
7	4070897	16	Shim 18Ga	
8	4070898	12	Shim 11Ga	
9	4811902	4	Washer M8	
10	5241200	4	Washer M12	
11	5251010	28	Bolt M10 x 20	
12	5251012	4	Bolt M10 x 25	
13	1001199461	1	Telescope Cylinder Assembly (See Separate Breakdown in CYLINDER Section)	
14	1001108290	1	Cover, Boom End	
15	1001116876	1	Boom, Base	
16	1001116877	1	Boom, Fly	
17	1001118274	4	Retainer M8	
18	1001118287	8	Pad, Wear	
19	1001118288	8	Pad, Wear	

SECTION 4 - BOOM

FIGURE 4-5. MAIN BOOM ASSEMBLY - WITHOUT ARCTIC PACKAGE

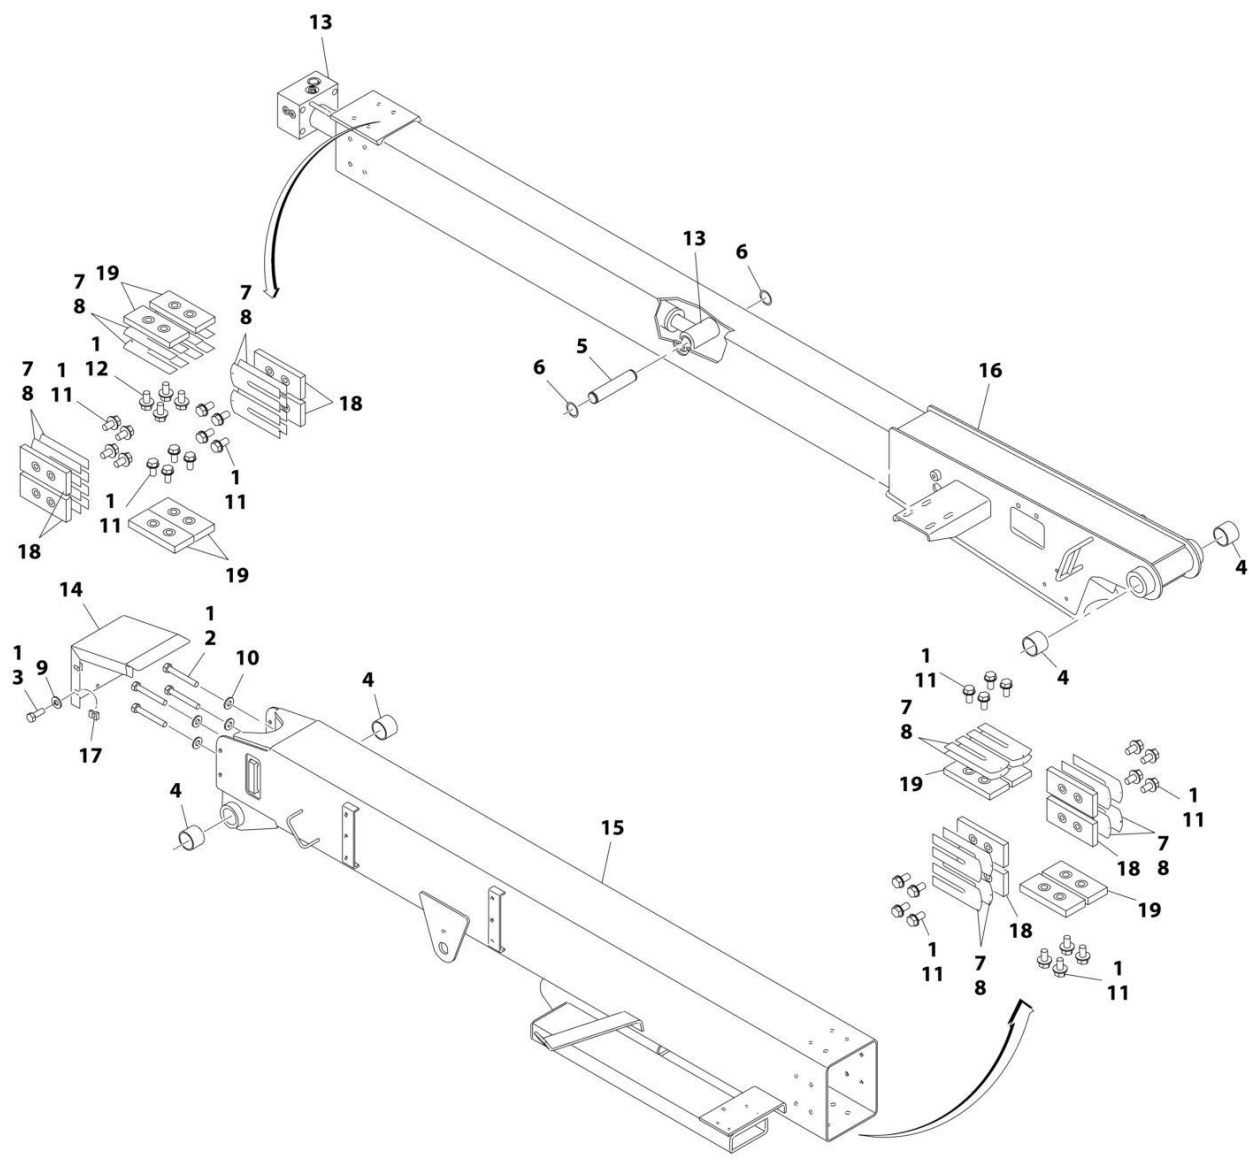

ART_1001117885


SECTION 4 - BOOM

FIGURE 4-5. MAIN BOOM ASSEMBLY - WITHOUT ARCTIC PACKAGE

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001117885	Ref	MAIN BOOM ASSEMBLY	C
1	0100011	AR	Compound, Locking	
2	0711227	4	Bolt M12 x 100 Grade 10.9	
3	0760812	4	Bolt M8 x 25	
4	0961948	4	Bushing	
5	3422745	1	Pin	
6	3760115	2	Ring, Retaining	
7	4070897	16	Shim 18Ga	
8	4070898	12	Shim 11Ga	
9	4811902	4	Washer M8	
10	5241200	4	Washer M12	
11	5251010	28	Bolt M10 x 20	
12	5251012	4	Bolt M10 x 25	
13	1001120974	1	Telescope Cylinder Assembly (See Separate Breakdown in CYLINDER Section)	
14	1001108290	1	Cover, Boom End	
15	1001116876	1	Boom, Base	
16	1001116877	1	Boom, Fly	
17	1001118274	4	Nut, Retainer M8	
18	1001118287	8	Pad, Wear	
19	1001118288	8	Pad, Wear	

SECTION 4 - BOOM

FIGURE 4-6. JIB ASSEMBLY - WITHOUT ARCTIC PACKAGE

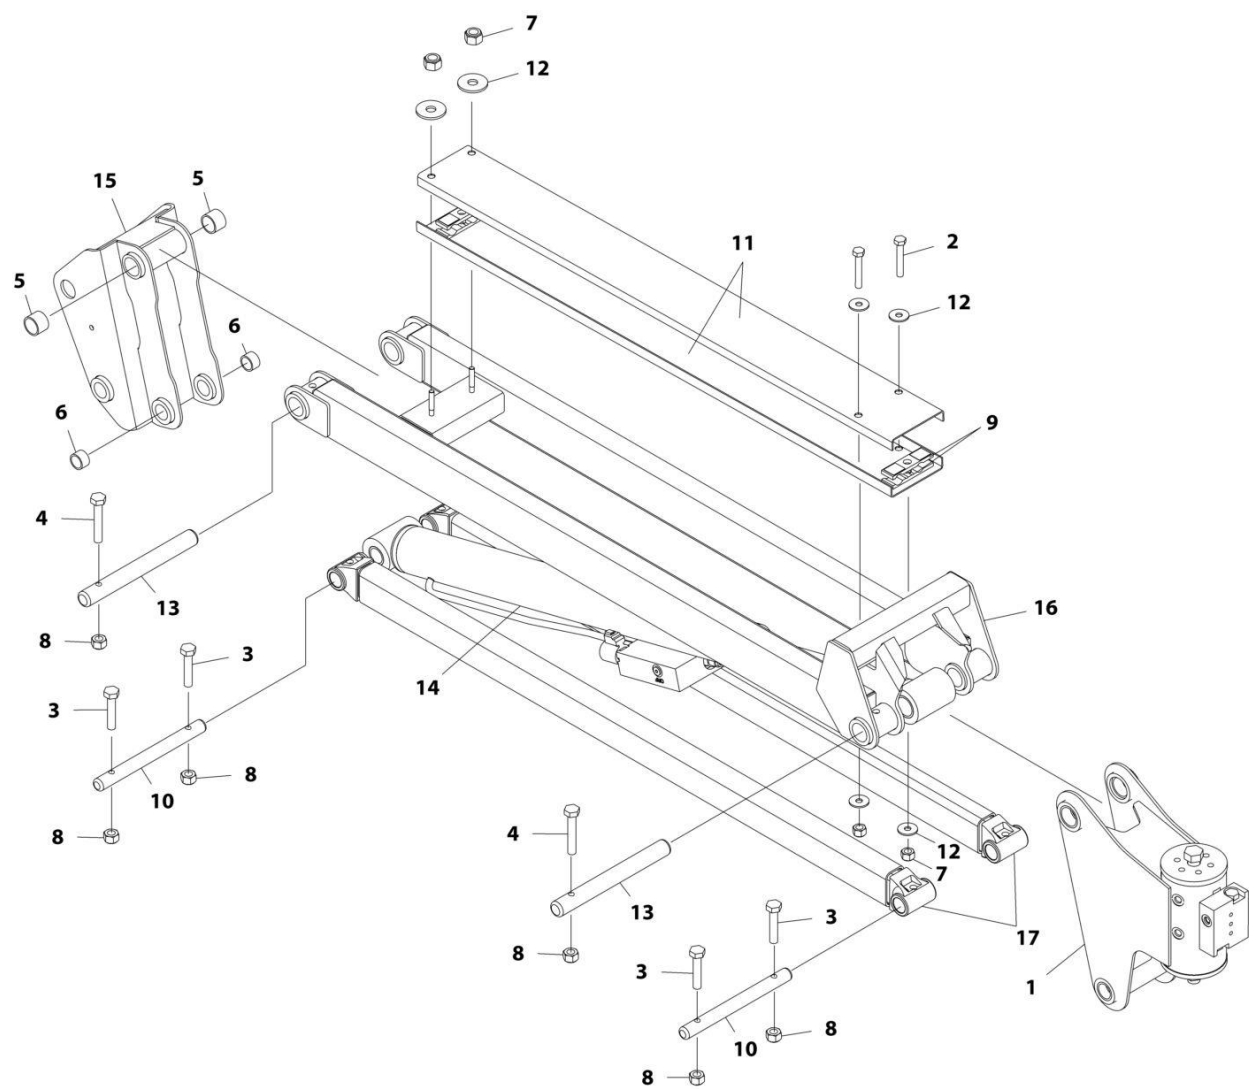

ART_1001117884


SECTION 4 - BOOM

FIGURE 4-6. JIB ASSEMBLY - WITHOUT ARCTIC PACKAGE

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001117884	Ref	JIB ASSEMBLY - WITHOUT ARCTIC PACKAGE	C
1	0060044	1	Platform Rotator Assembly (See Separate Breakdown in this Section)	
2	0700818	2	Bolt M8 x 50	
3	0701018	4	Bolt M10 x 50	
4	0701020	2	Bolt M10 x 60	
5	0961951	2	Bushing	
6	0962292	2	Bushing	
7	3290805	4	Nut M8	
8	3291005	6	Nut M10	
9	3340860	4	Pad, Rubber	
10	3422791	2	Pin	
11	3572551	2	Channel, Hose Carrier	
12	4811902	6	Washer M8	
13	1001116550	2	Pin	
14	1001123004	1	Lift Cylinder Assembly - Jib (See Separate Breakdown in CYLINDER Section)	
15	1001118394	1	Pivot, Jib	
16	1001118482	1	Link, Jib (Top)	
17	1001094670	2	Link, Jib (Bottom)	

SECTION 4 - BOOM

FIGURE 4-7. JIB ASSEMBLY - WITH ARCTIC PACKAGE

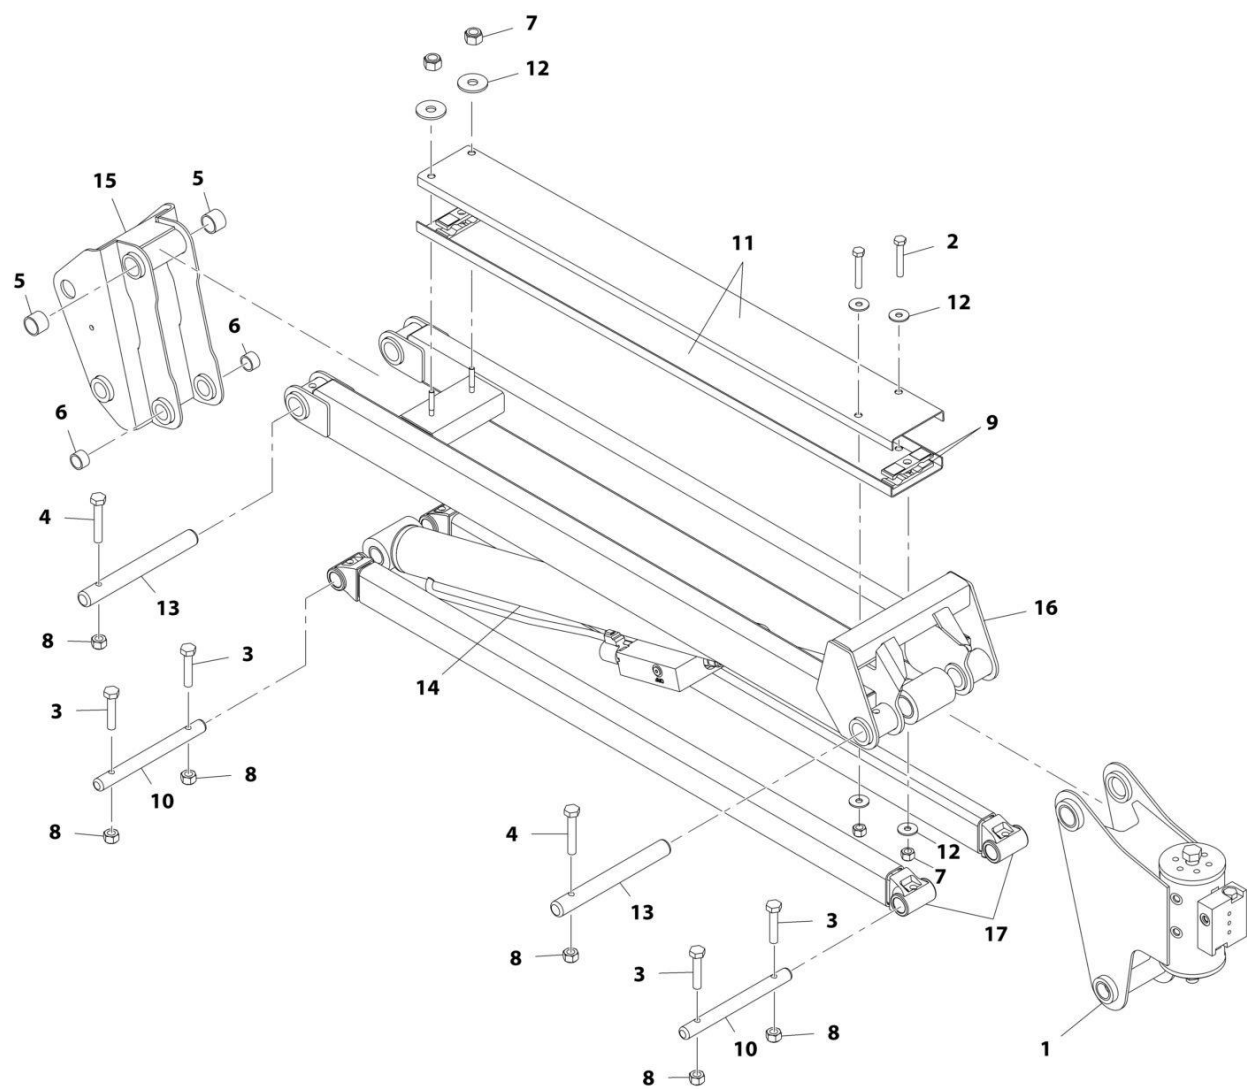

ART_1001119370


SECTION 4 - BOOM

FIGURE 4-7. JIB ASSEMBLY - WITH ARCTIC PACKAGE

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119370	Ref	JIB ASSEMBLY - WITH ARCTIC PACKAGE	C
1	1001119369	1	Platform Rotator Assembly (See Separate Breakdown in this Section)	
2	0700818	2	Bolt M8 x 50	
3	0701018	4	Bolt M10 x 50	
4	0701020	2	Bolt M10 x 60	
5	0961951	2	Bushing	
6	0962292	2	Bushing	
7	3290805	4	Nut M8	
8	3291005	6	Nut M10	
9	3340860	4	Pad, Rubber	
10	3422791	2	Pin	
11	3572551	2	Channel, Hose Carrier	
12	4811902	6	Washer M8	
13	1001116550	2	Pin	
14	1001123004	1	Lift Cylinder Assembly - Jib (See Separate Breakdown in CYLINDER Section)	
15	1001118394	1	Pivot, Jib	
16	1001118482	1	Link, Jib (Top)	
17	1001094670	2	Link, Jib (Bottom)	

SECTION 4 - BOOM

FIGURE 4-8. PLATFORM ROTATOR ASSEMBLY - WITHOUT ARCTIC PACKAGE

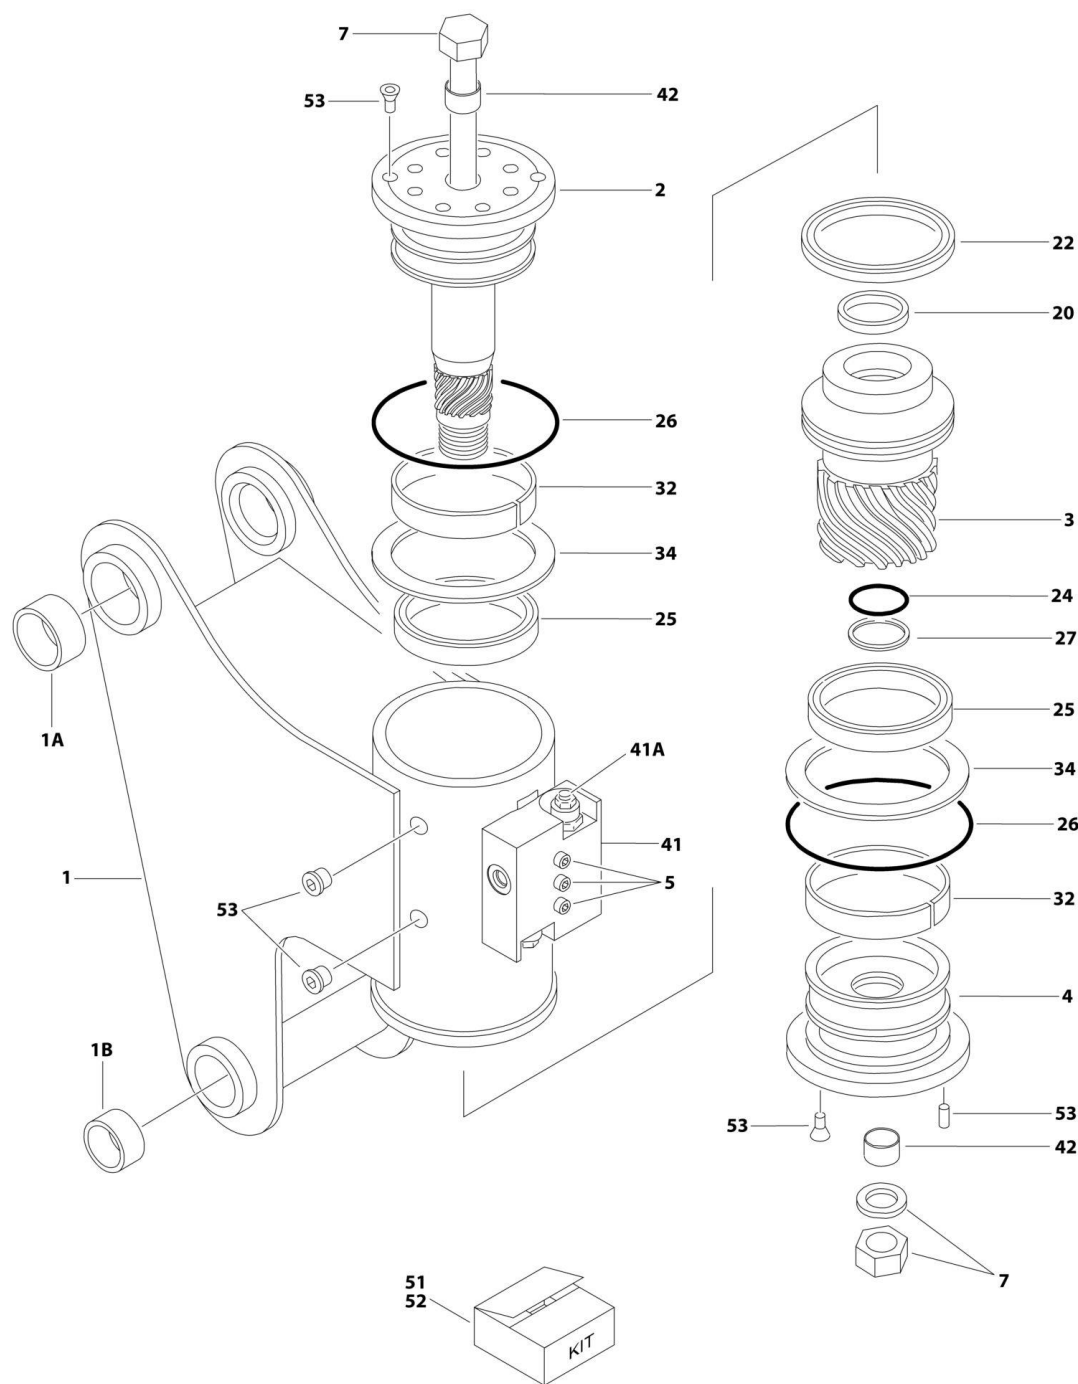


ART_0060044

FIGURE 4-8. PLATFORM ROTATOR ASSEMBLY - WITHOUT ARCTIC PACKAGE

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	0060044	Ref	ROTATOR ASSEMBLY	D
1	See Note	1	Case/Bracket Weldment (Note: Not Available - Purchase Complete Assembly)	
1A	0962257	2	Bushing	
1B	0961947	2	Bushing	
2	7017120	1	Shaft (Rotator with Helac Control #25928)	
2	7017196	1	Shaft (Rotator with Helac Control #26962)	
3	7017121	1	Piston Sleeve (Rotator with Helac Control #25928)	
3	7027900	1	Piston Sleeve (Rotator with Helac Control #26962)	
4	See Note	1	Cap, End (Rotator with Helac Control #25928) (Note: Use p/n 0060044)	
4	7027901	1	Cap, End (Rotator with Helac Control #26962)	
5	See Note	3	Capscrew 1/4 x 1-1/2, Grade 8 (Note: Not Available - Purchase Locally)	
7	7017126	1	Tie Rod Assembly	
20	See Note	NSS	Seal, Rod (Note: Use Item 52)	
22	See Note	NSS	Seal, Piston (Note: Use Item 52)	
24	See Note	NSS	Seal, Cap (Note: Use Item 52)	
25	See Note	NSS	Packing, Bearing (Note: Use Item 52)	
26	See Note	NSS	Seal (Note: Use Item 52)	
27	See Note	NSS	Ring, Back-Up Cap (Note: Use Item 52)	
32	See Note	NSS	Bearing, Shaft (Note: Use Item 51)	
34	See Note	2	Washer, Thrust (Note: Use Item 51)	
41	7017172	1	Counterbalance Valve Assembly (Helac p/n 24327, 26553 or 26554 Stamped Beside Mounting Screws)	
41A	7011323	2	Valve, Cartridge (Helac p/n 24327 Valve)	
41A	2900770	2	Seal Kit - 7011323 Cartridge (1 Per Assembly)	
41A	7017192	2	Valve Cartridge (Helac p/n 26553 or 26554) (No Seal Kit Available)	
42	70004323	1	Bushing, Shaft	
51	7017122	1	Bearing Kit (Includes Items 32-34)	
52	7017127	1	Seal Kit - Standard (Includes Items 20,22,24,25,26 & 27)	
52	70000341	1	Seal Kit - Low Temperature (Includes Items 20,22,24,25,26 & 27)	
53	7017123	1	Hardware Kit	

132

H340AJ




ART_1001119369

FIGURE 4-9. PLATFORM ROTATOR ASSEMBLY - WITH ARCTIC PACKAGE

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119369	Ref	PLATFORM ROTATOR ASSEMBLY - WITH ARCTIC PACKAGE	B
1	See Note	1	Case/Bracket Weldment (Note: Not Available - Purchase Complete Assembly)	
1A	0962257	2	Bushing	
1B	0961947	2	Bushing	
2	7017196	1	Shaft	
3	7027900	1	Piston Sleeve	
4	7027901	1	Cap, End	
5	See Note	3	Capscrew, 1/4 x 1-1/2 Grade 8 (Note: Not Available - Purchase Locally)	
7	7017126	1	Tie Rod Assembly	
20	See Note	1	Seal, Rod (Note: Use Item 52)	
22	See Note	1	Seal, Piston (Note: Use Item 52)	
24	See Note	1	Seal, Cap (Note: Use Item 52)	
25	See Note	2	Packing, Bearing (Note: Use Item 52)	
26	See Note	2	Seal (Note: Use Item 52)	
27	See Note	1	Ring, Back-up Cap (Note: Use Item 52)	
32	See Note	2	Bearing, Shaft (Note: Use Item 51)	
34	See Note	2	Washer, Thrust (Note: Use Item 51)	
41	7017172	1	Counterbalance Valve Assembly	
41A	7017192	2	Valve Cartridge (No Seal Kit Available)	
42	70004323	2	Bushing, Shaft	
51	7017122	1	Bearing Kit (Includes Items 32-34)	
52	70004322	1	Seal Kit (Includes Items 20, 22, 24, 25, 26 & 27)	
53	7017123	1	Hardware Kit	
54	70001697	4	Screw 1/4 x 3/8 Grade 8	

SECTION 4 - BOOM

FIGURE 4-10. PLATFORM SUPPORT INSTALLATION - WITH 1 CELL LSS

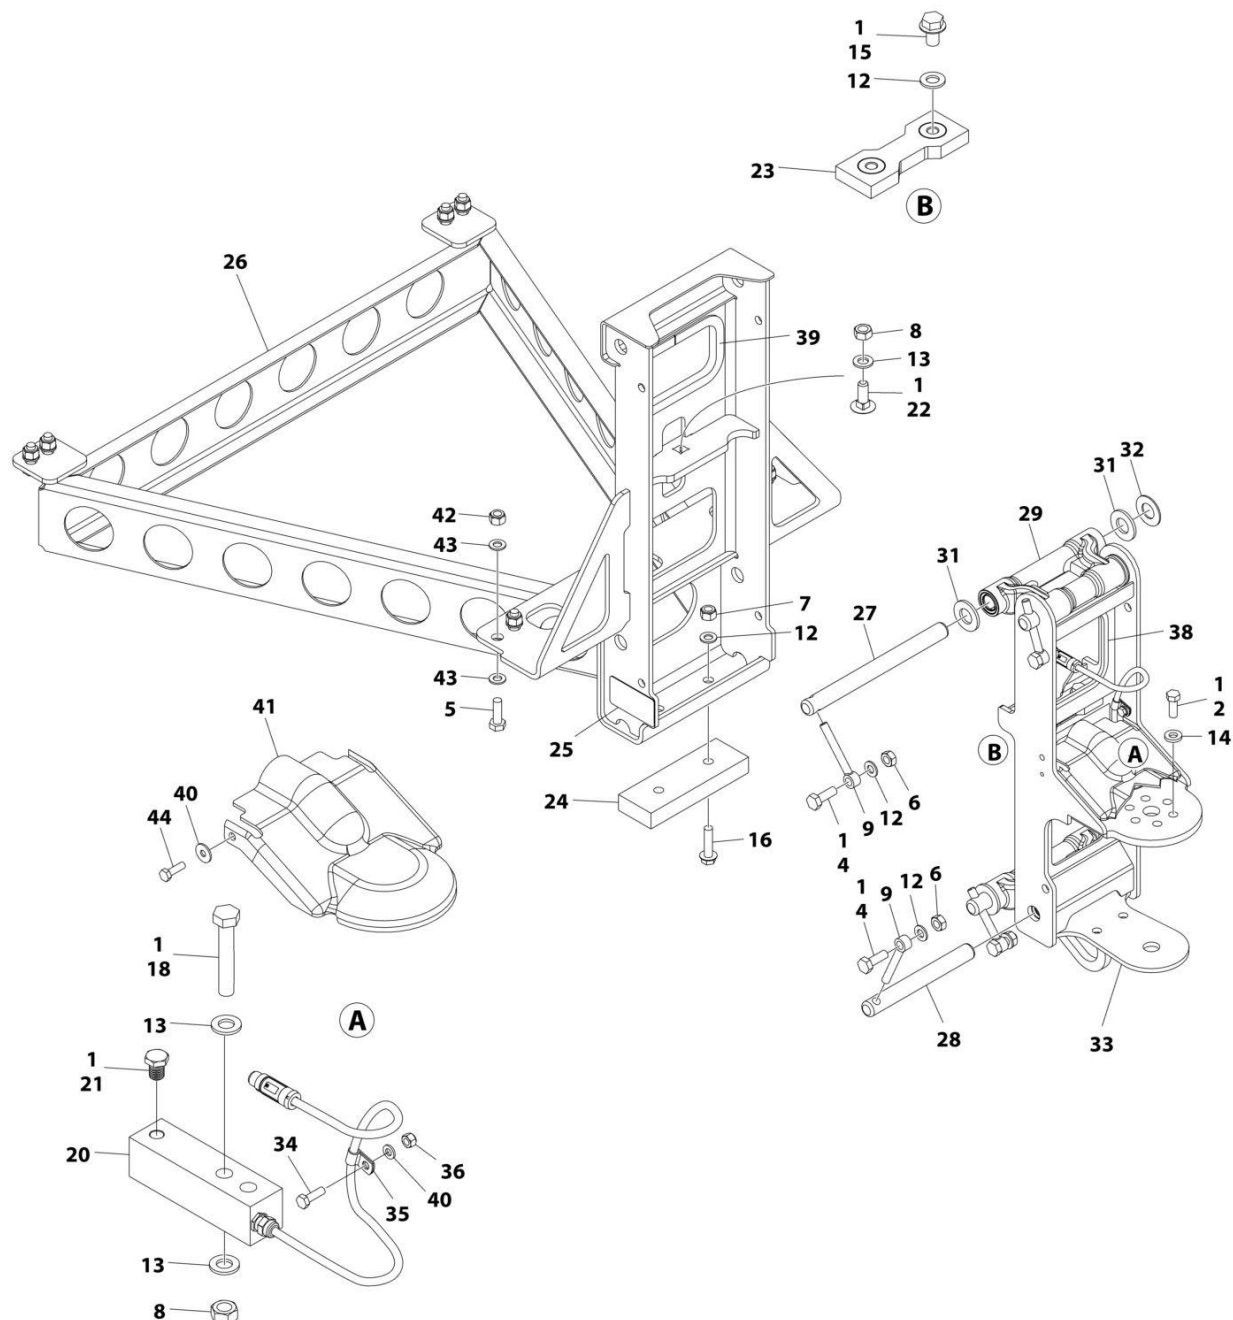


ART_1001217227_F

FIGURE 4-10. PLATFORM SUPPORT INSTALLATION - WITH 1 CELL LSS

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001217227	Ref	PLATFORM SUPPORT INSTALLATION - WITH 1 CELL LSS	F
1	0100011	AR	Compound, Locking	
2	0681608	6	Bolt 3/8 x 1	
4	0761014	4	Bolt M10 x 30	
5	0761215	8	Bolt M12 x 35	
6	3291001	4	Nut M10	
7	3291005	2	Nut M10	
8	3291201	3	Nut M12	
9	3841143	4	Keeper, Pin	
12	4812000	8	Washer M10	
13	4812100	5	Washer M12	
14	4891600	6	Washer 3/8	
15	5251008	2	Bolt M10 x 16	
16	5251016	2	Bolt M10 x 40	
18	1001098828	2	Bolt M12 x 70 Grade 10.9	
20	1001247468	1	Gauge, Load Sensing	
21	1001188622	1	Screw	
22	1001188844	1	Bolt M12 x 35	
23	1001190985	1	Pad, Wear	
24	1001200491	1	Pad, Wear	
25	1001216630	2	Decal - Tie Down/No Lift	
26	1001217228	1	Platform Support	
27	1001217242	2	Pin	
28	1001217243	2	Pin	
29	1001217244	2	Link	
31	1001217253	8	Bearing, Thrust	
32	1001217254	4	Bearing, Thrust	
33	1001217267	1	Support	
34	0760610	1	Bolt M6 x 20	
35	1320136	1	Clamp	
36	3290605	1	Nut M6	
38	4060804	14.4 in/ 36.5cm	Shield	
39	4060805	15.9 in/ 40.5 cm	Shield	
40	4811702	3	Washer M6	
41	1001228627	1	Cover	
42	3291205	8	Nut M12	
43	5241200	16	Washer M12	
44	0760606	2	Bolt M6 x 12	

SECTION 4 - BOOM

FIGURE 4-11. POWER TRACK INSTALLATION

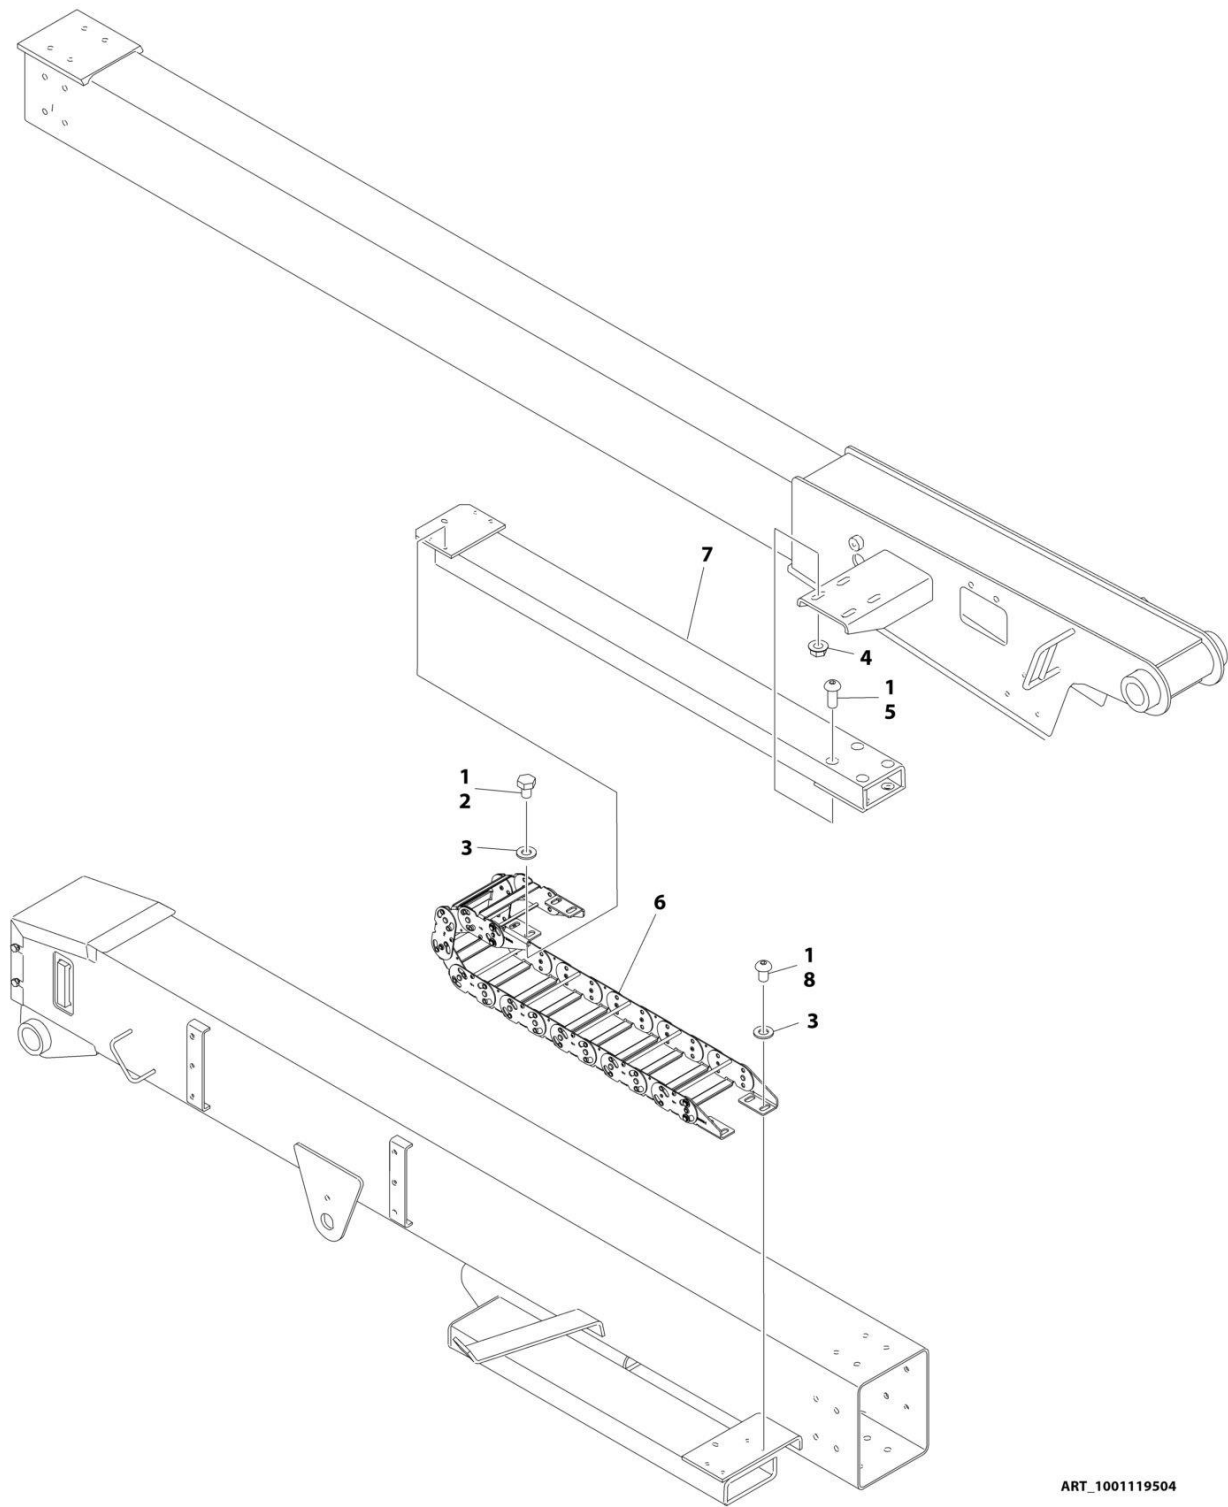


ART_1001119504

FIGURE 4-11. POWER TRACK INSTALLATION

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119504	Ref	POWER TRACK INSTALLATION	C
1	0100011	AR	Compound, Locking	
2	0761007	4	Bolt M10 x 14	
3	4812000	8	Washer M10	
4	5221000	4	Nut M10 Grade 10.9	
5	8310668	4	Screw M10 x 25 Grade 10.9	
6	1001224891	1	Carrier, Power Track	
6	70006269	1	Repair Kit (Includes 10 Link Section of Track)	
6	70006280	1	Bracket Kit (Includes 4 Mounting Feet and Hardware to Attach to Track)	
7	1001119513	1	Tube, Support	
8	1001119527	4	Screw M10 x 16	

SECTION 4 - BOOM

FIGURE 4-12. CONTROL VALVES INSTALLATION - BOOM

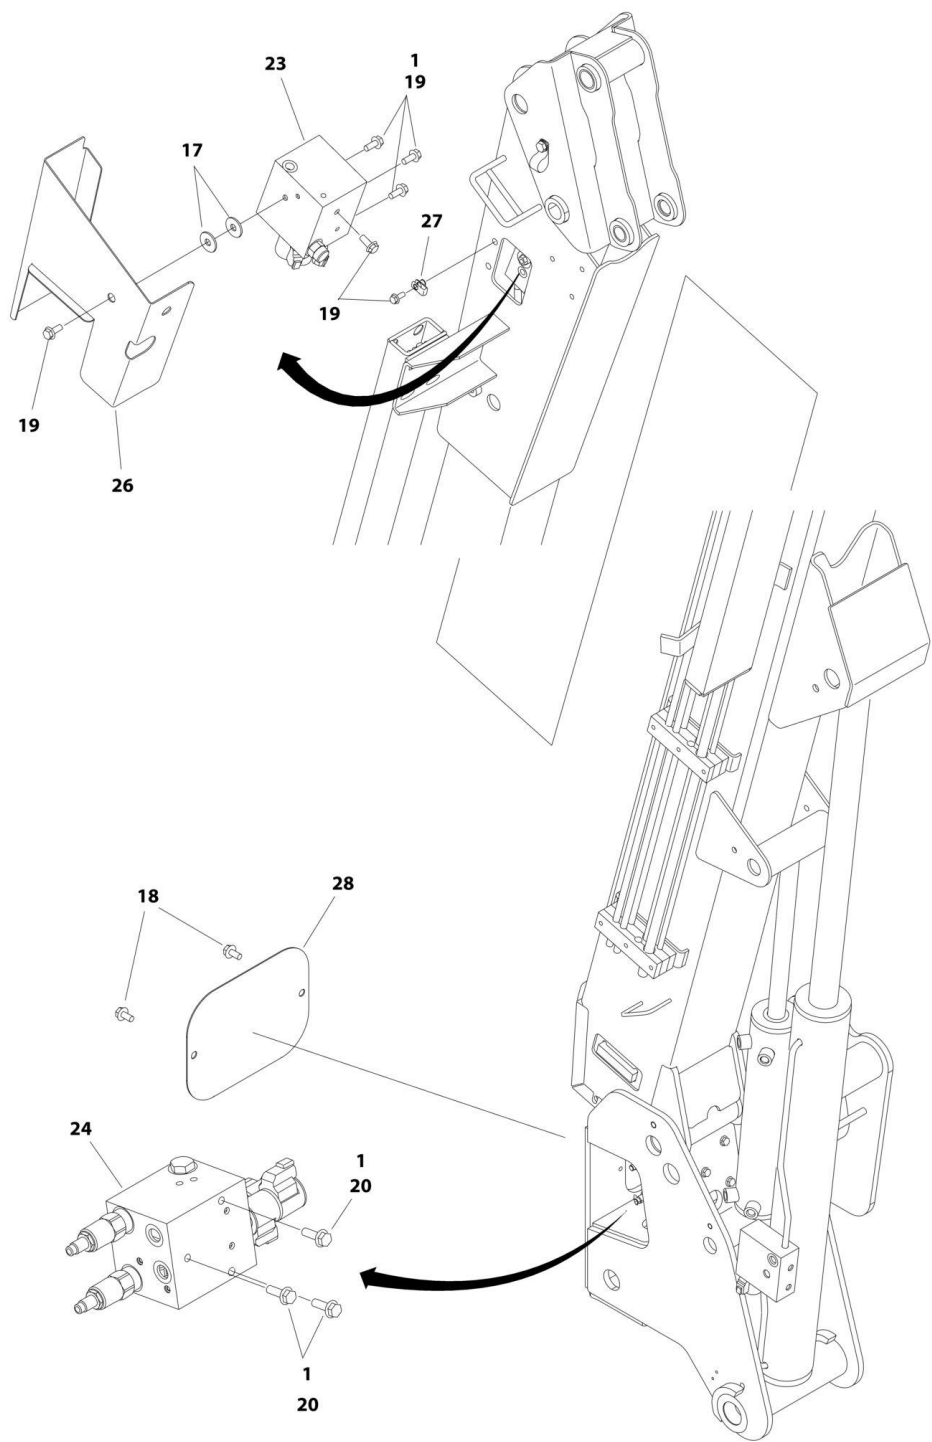

ART_1001167238_30F3

SECTION 4 - BOOM

FIGURE 4-12. CONTROL VALVES INSTALLATION - BOOM

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001167238	Ref	CONTROL VALVES INSTALLATION - BOOM	I
1	0100011	AR	Compound, Locking	
17	4812002	2	Washer M10	
18	5250808	2	Bolt M8 x 16	
19	5250810	14	Bolt M8 x 20	
20	5250812	3	Bolt M8 x 25	
23	1001116228	1	Fly Boom Valve Assembly (See Separate Breakdown in this Section)	
24	1001136244	1	Boom Upright Valve Assembly (See Separate Breakdown in this Section)	
26	1001116835	1	Shield	
27	1001118274	1	Nut M8	
28	1001118595	1	Cover	

SECTION 4 - BOOM

FIGURE 4-13. FLY BOOM VALVE ASSEMBLY


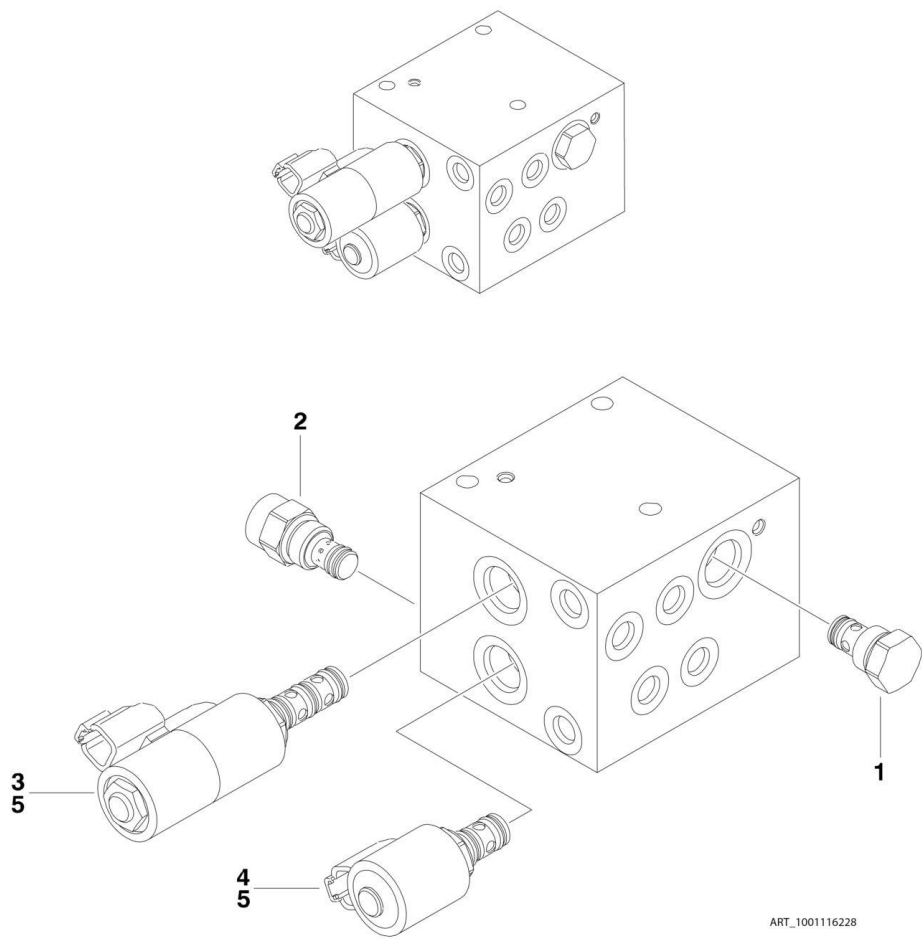


FIGURE 4-13. FLY BOOM VALVE ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001116228	Ref	FLY BOOM VALVE ASSEMBLY	D
1	7012955	1	Cartridge, Check Valve	
1	7012967	1	Seal Kit - 7012955 Cartridge	
2	7023970	1	Cartridge, Flow Regulator	
2	7012953	1	Seal Kit - 7023970 Cartridge	
3	7017452	1	Cartridge, Solenoid Valve (without Coil) (Rotate)	
3	7017402	1	Seal Kit - 7017452 Cartridge	
4	7012941	1	Cartridge, Solenoid Valve (without Coil) (Jib)	
4	7010543	1	Seal Kit - 7012941 Cartridge	
5	70002386	3	Coil	

SECTION 4 - BOOM

FIGURE 4-14. BOOM UPRIGHT VALVE ASSEMBLY

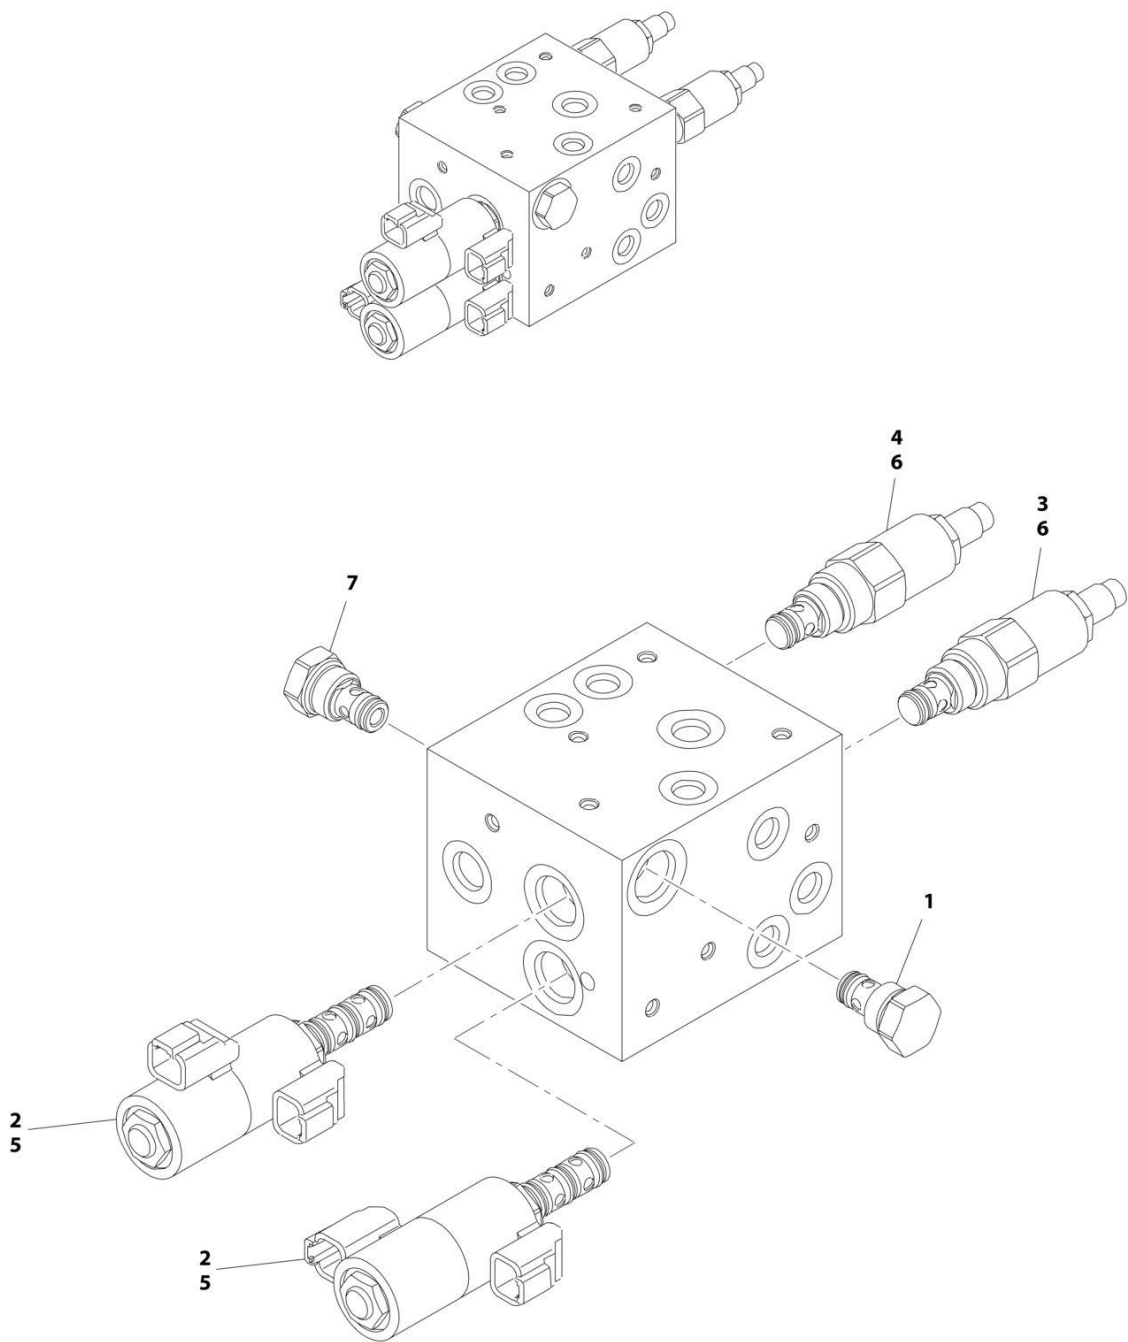

ART_1001136244


FIGURE 4-14. BOOM UPRIGHT VALVE ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001136244	Ref	BOOM UPRIGHT VALVE ASSEMBLY	C
1	7012955	2	Cartridge, Check Valve	
1	7012967	2	Seal Kit - 7012955 Cartridge	
2	7017452	2	Cartridge, Solenoid Valve (without Coil) (Telescope/Platform Level)	
2	7017402	2	Seal Kit - 7017452 Cartridge	
3	7017427	1	Cartridge, Relief	
3	7012998	1	Seal Kit - 7017427 Cartridge	
4	70002954	1	Cartridge, Relief	
4	7012998	1	Seal Kit - 70002954 Cartridge	
5	70002963	4	Coil	
6	See Note	2	Orifice (Note: Not Available for Purchase)	
7	7017498	1	Piston, Pilot	

SECTION 5 - PLATFORM

SECTION 5 - PLATFORM

FIGURE 5-1. PLATFORM ASSEMBLY - 30IN X 4FT (76CM X 1.22M) - GATE ENTRY

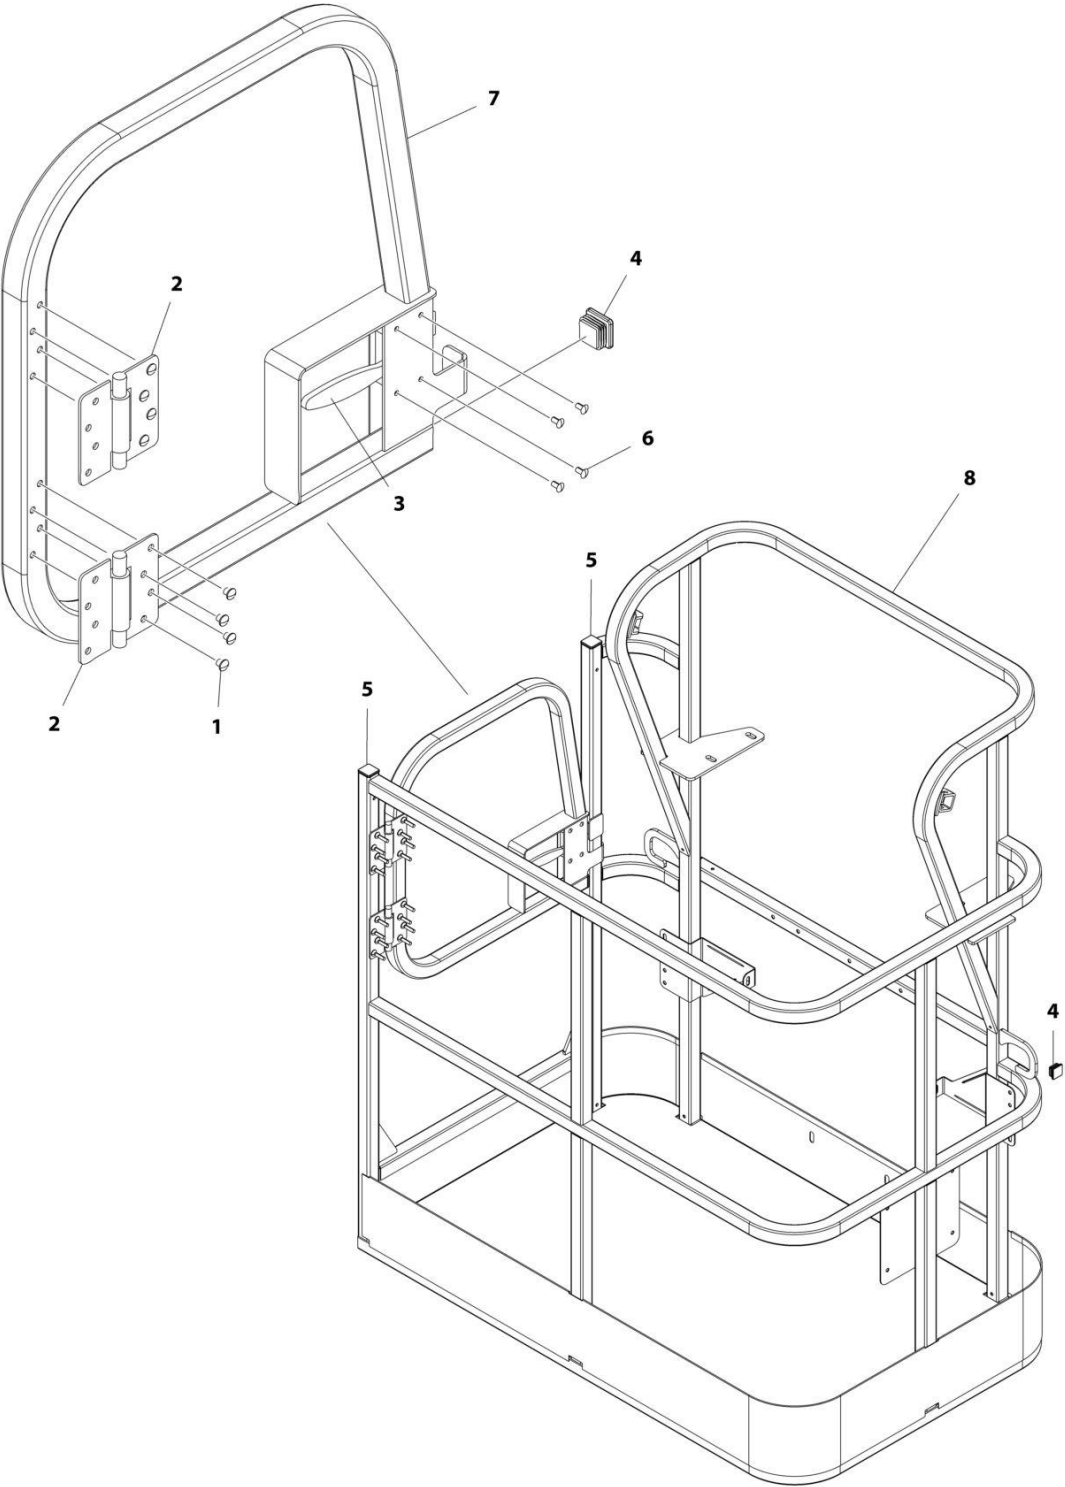

ART_1001186387


SECTION 5 - PLATFORM

FIGURE 5-1. PLATFORM ASSEMBLY - 30IN X 4FT (76CM X 1.22M) - GATE ENTRY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001186387	Ref	PLATFORM ASSEMBLY	C
		Ref	Note: Platform and Mesh must be ordered separately for Platforms with Mesh. See SPECIAL OPTIONS SECTION for Mesh Installations.	
		Ref	Note: Replacement Decals Must be Ordered Separately - See DECALS SECTION.	
1	2080040	16	Fastener, Huck	
2	2600281	2	Hinge, Self-Closing	
3	2940074	1	Latch	
4	3520072	3	Plug	
5	3520198	2	Plug	
6	3820020	4	Rivet	
7	1001144629	1	Gate	
8	See Note	1	Platform (Note: Not Available - Purchase Platform Assembly)	

SECTION 5 - PLATFORM

FIGURE 5-2. PLATFORM ASSEMBLY - 30IN X 5FT (76CM X 1.52M) - GATE ENTRY

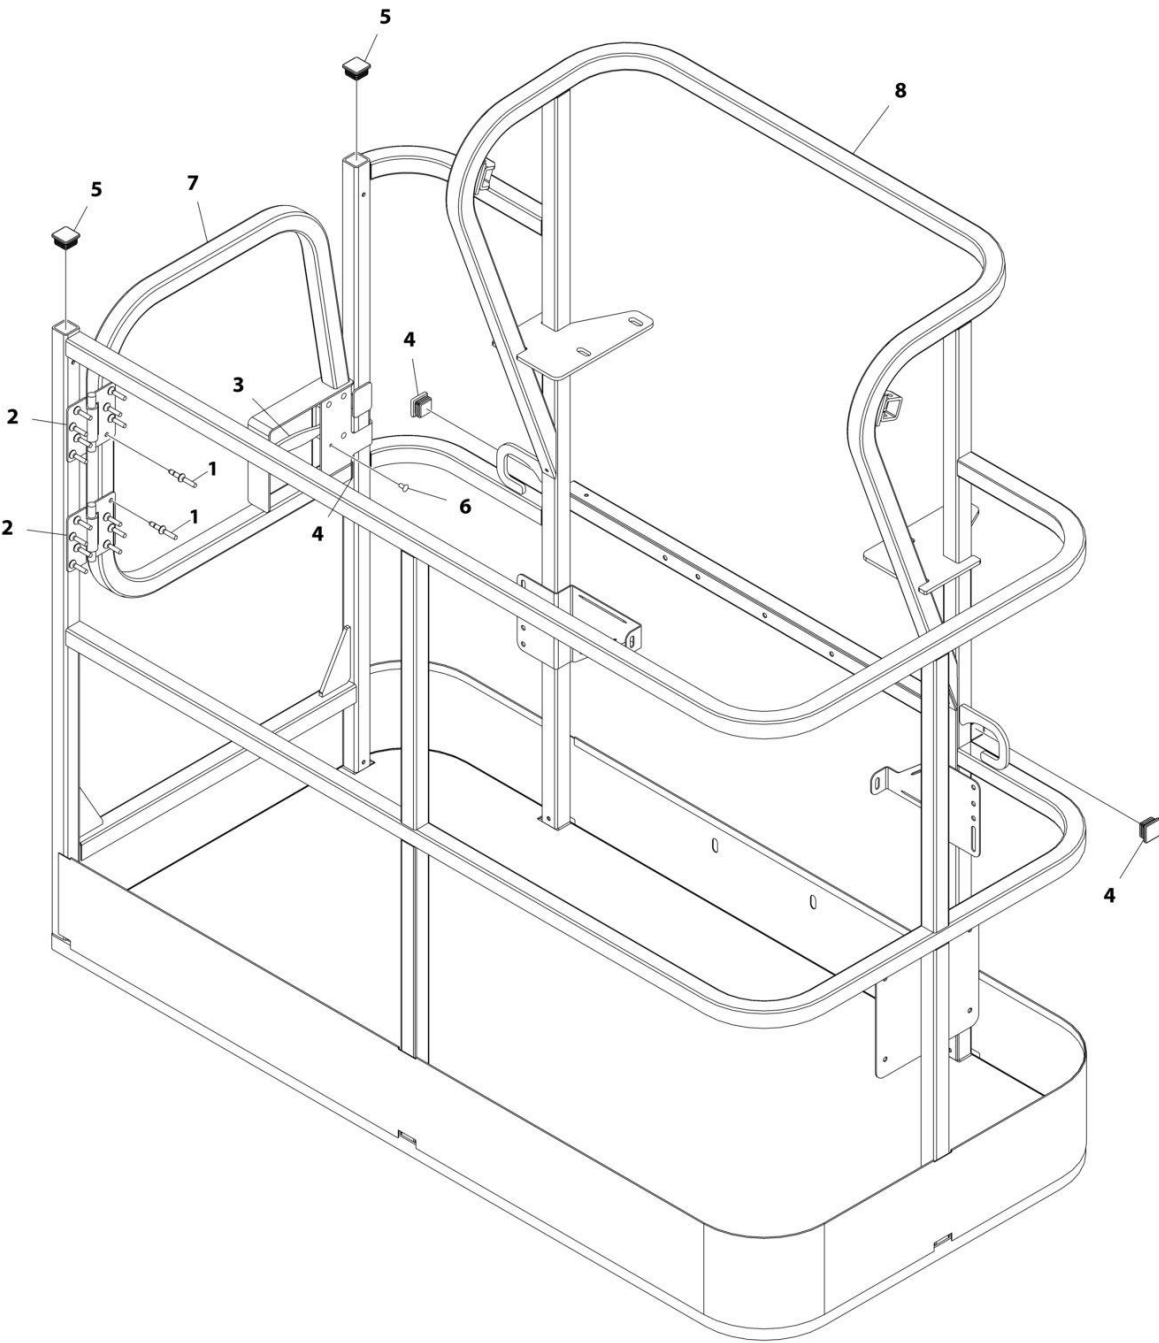

ART_1001186386


SECTION 5 - PLATFORM

FIGURE 5-2. PLATFORM ASSEMBLY - 30IN X 5FT (76CM X 1.52M) - GATE ENTRY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001186386	Ref	PLATFORM ASSEMBLY	C
		Ref	Note: Platform and Mesh must be ordered separately for Platforms with Mesh. See SPECIAL OPTIONS SECTION for Mesh Installations.	
		Ref	Note: Replacement Decals Must be Ordered Separately - See DECALS SECTION.	
1	2080040	16	Fastener, Huck	
2	2600281	2	Hinge, Self-Closing	
3	2940074	1	Latch	
4	3520072	3	Plug	
5	3520198	2	Plug	
6	3820020	4	Rivet	
7	1001144629	1	Gate	
8	See Note	NSS	Platform (Note: Not Available - Purchase Platform Assembly)	

SECTION 5 - PLATFORM

FIGURE 5-3. PLATFORM ASSEMBLY - 30IN X 4FT (76CM X 1.22M) - DROP BAR ENTRY

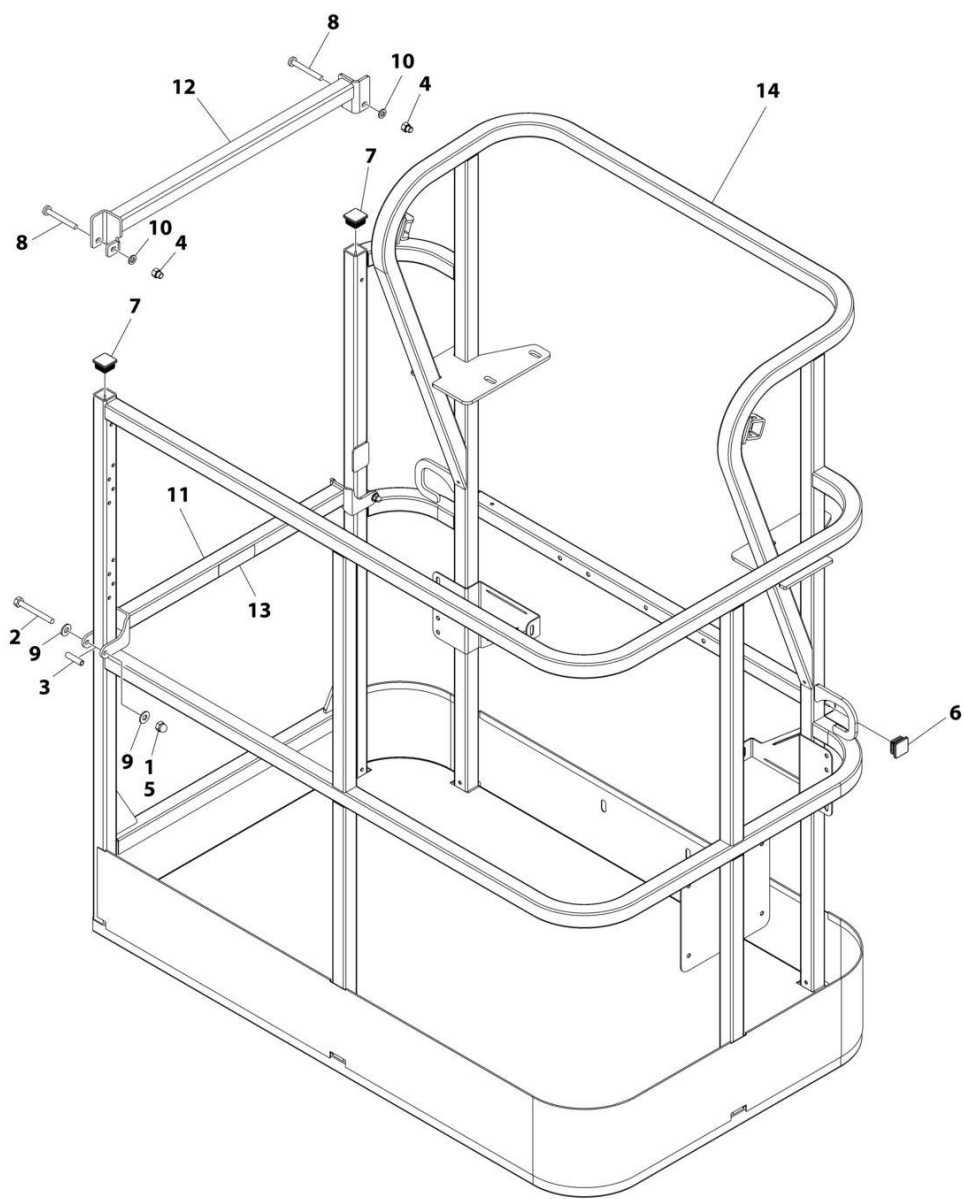

ART_1001186375


SECTION 5 - PLATFORM

FIGURE 5-3. PLATFORM ASSEMBLY - 30IN X 4FT (76CM X 1.22M) - DROP BAR ENTRY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001186375	Ref	PLATFORM ASSEMBLY	B
		Ref	Note: Platform and Mesh must be ordered separately for Platforms with Mesh. See SPECIAL OPTIONS SECTION for Mesh Installations.	
		Ref	Note: Replacement Decals Must be Ordered Separately - See DECALS SECTION.	
1	0100011	AR	Compound, Locking	
2	0641418	2	Bolt 1/4 x 2-1/4	
3	0961845	2	Bushing	
4	3290606	2	Nut M6	
5	3300151	2	Nut 1/4	
6	3520072	2	Plug	
7	3520198	2	Plug	
8	4010618	2	Screw M6 x 50	
9	4711400	4	Washer 1/4	
10	4811700	2	Washer M6	
11	1001138494	1	Bar, Drop	
12	1001138514	1	Rail - Top	
13	1001140429	1	Decal - Drop Bar	
14	See Note	1	Platform (Note: Not Available - Purchase Platform Assembly)	

SECTION 5 - PLATFORM

FIGURE 5-4. PLATFORM ASSEMBLY - 30IN X 5FT (76CM X 1.52M) - DROP BAR ENTRY

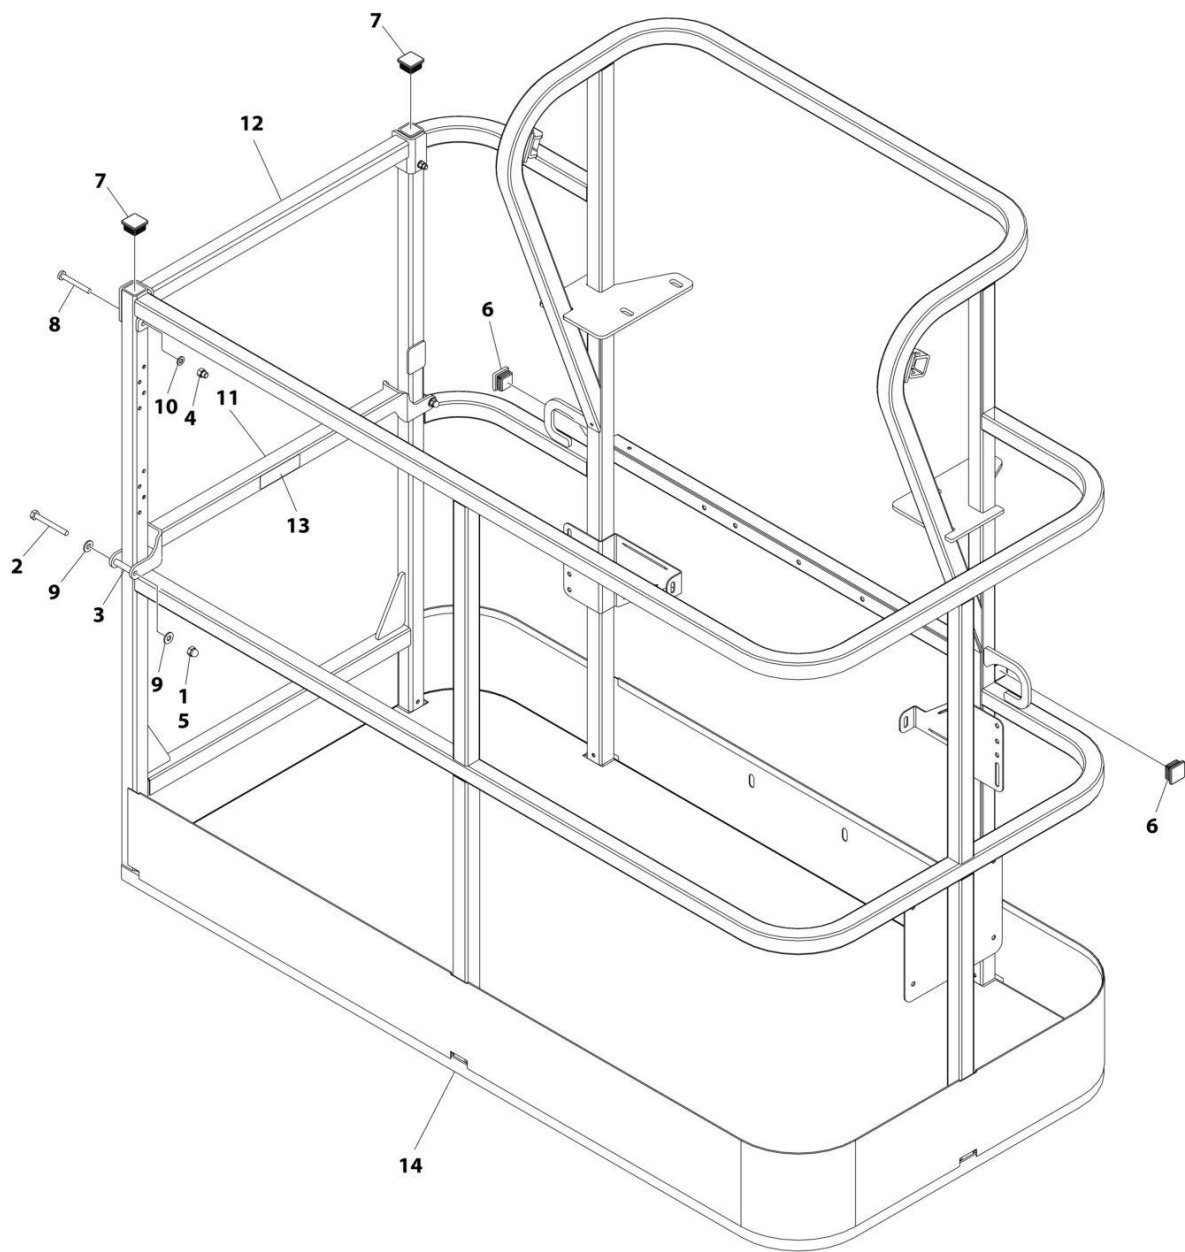

ART_1001186377


SECTION 5 - PLATFORM

FIGURE 5-4. PLATFORM ASSEMBLY - 30IN X 5FT (76CM X 1.52M) - DROP BAR ENTRY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001186377	Ref	PLATFORM ASSEMBLY	C
		Ref	Note: Platform and Mesh must be ordered separately for Platforms with Mesh. See SPECIAL OPTIONS SECTION for Mesh Installations.	
		Ref	Note: Replacement Decals Must be Ordered Separately - See DECALS SECTION.	
1	0100011	AR	Compound, Locking	
2	0641420	2	Bolt 1/4 x 2-1/2	
3	0961845	2	Bushing	
4	3290606	2	Nut M6	
5	3300151	2	Nut 1/4	
6	3520072	2	Plug	
7	3520198	2	Plug	
8	4010618	2	Screw M6 x 50	
9	4711400	4	Washer 1/4	
10	4811700	2	Washer M6	
11	1001138494	1	Bar, Drop	
12	1001138514	1	Rail (Top)	
13	1001140429	1	Decal - Drop Bar	
14	See Note	NSS	Platform (Note: Not Available - Purchase Platform Assembly)	

SECTION 5 - PLATFORM

FIGURE 5-5. PLATFORM ASSEMBLY - 30IN X 3FT (76CM X 91.5CM) - WITH DROP BAR

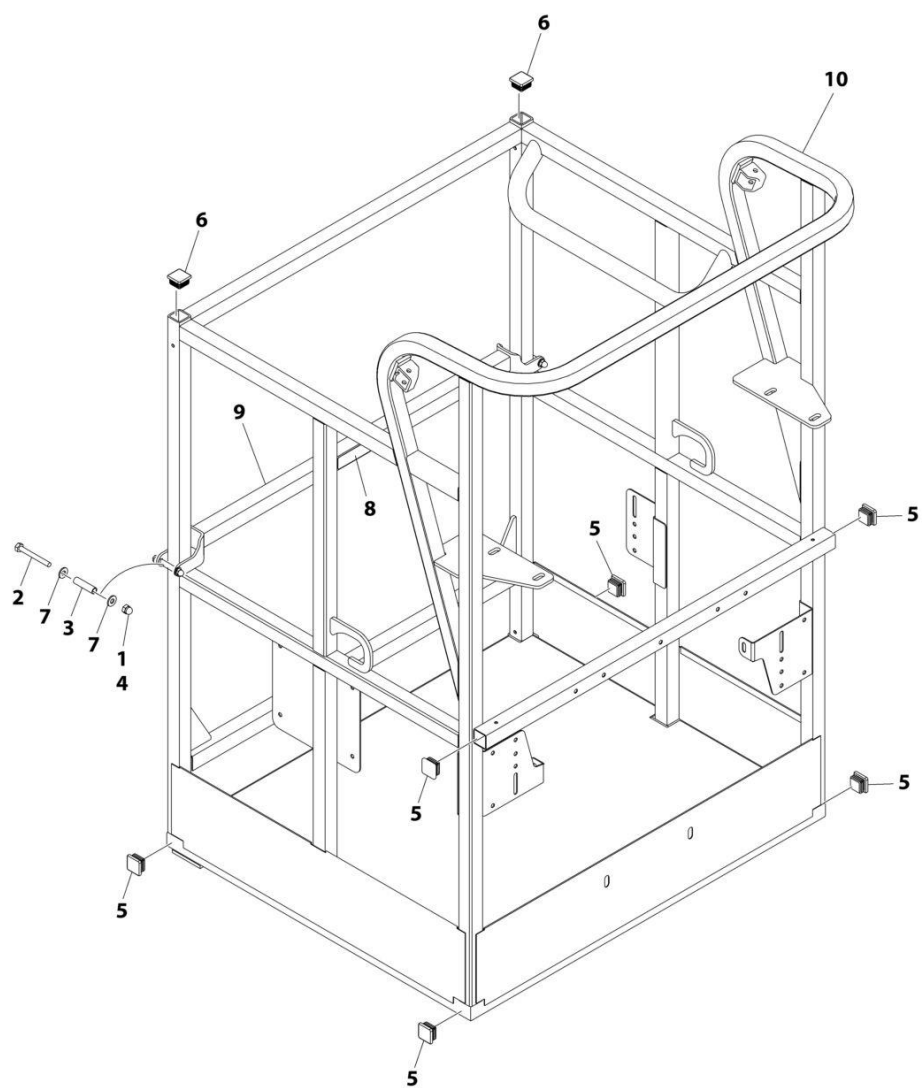

ART_1001228215


SECTION 5 - PLATFORM

FIGURE 5-5. PLATFORM ASSEMBLY - 30IN X 3FT (76CM X 91.5CM) - WITH DROP BAR

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001228215	Ref	PLATFORM ASSEMBLY	A
	See Note	Ref	Note: Platform and Mesh must be ordered separately for Platforms with Mesh. See SPECIAL OPTIONS SECTION for Mesh Installations.	
	See Note	Ref	Note: Replacement Decals Must be Ordered Separately - See DECAL SECTION.	
1	0100011	AR	Compound, Locking	
2	0641418	2	Bolt 1/4 x 2-1/4	
3	0961845	2	Bushing	
4	3300151	2	Nut 1/4	
5	3520072	6	Cap, Plug	
6	3520198	2	Cap, Plug	
7	4711400	4	Washer 1/4	
8	1001140429	1	Decal - Drop Bar	
9	1001226872	1	Bar, Drop	
10	See Note	NSS	Platform (Note: Not Available - Purchase Platform Assembly)	

SECTION 5 - PLATFORM

FIGURE 5-6. TRAY INSTALLATION

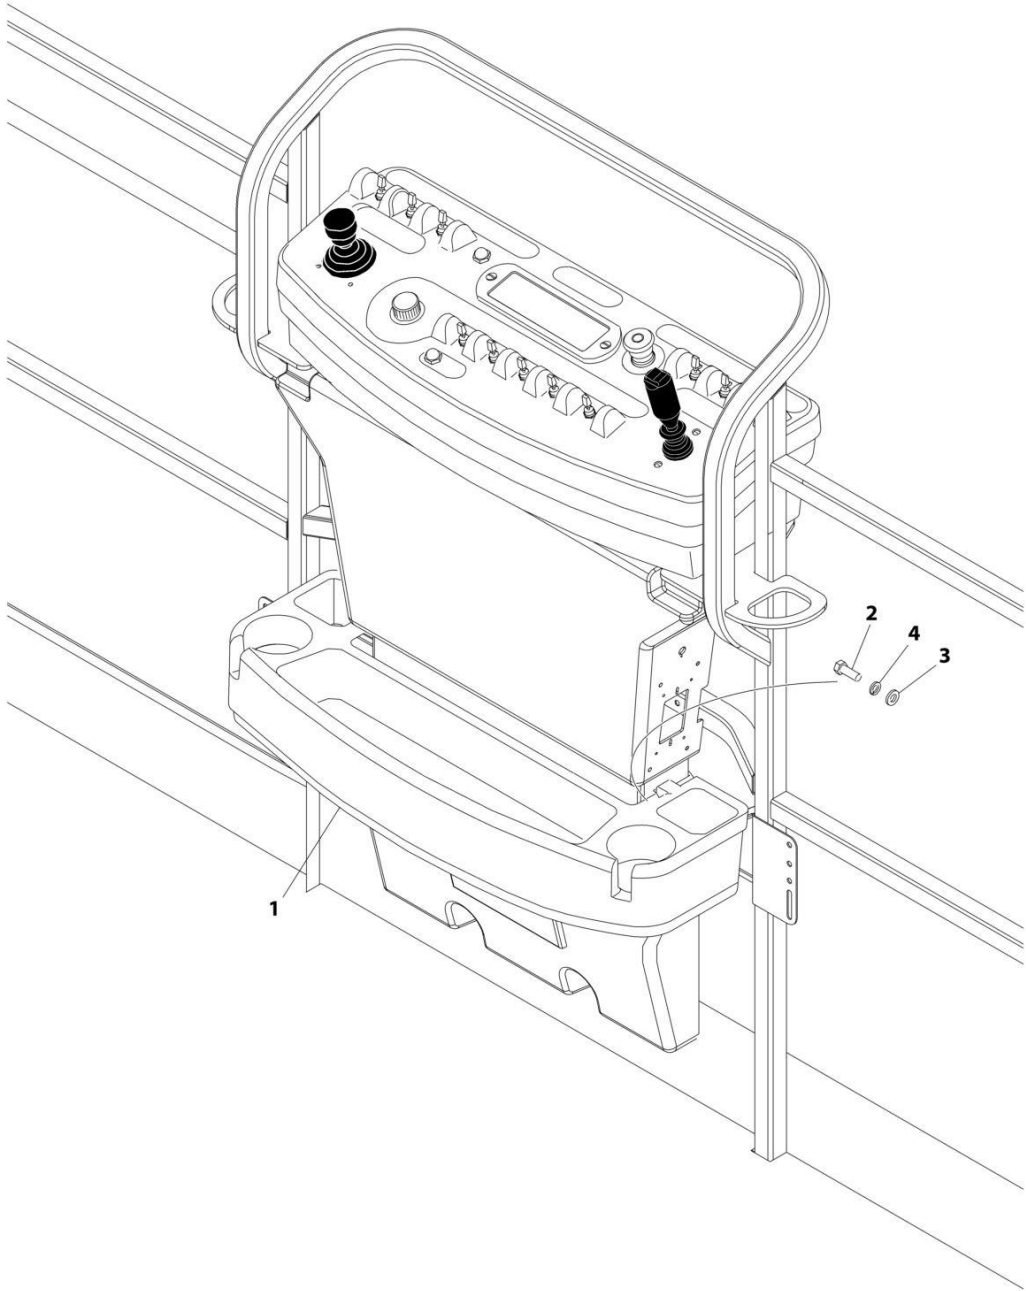


ART_1580012

FIGURE 5-6. TRAY INSTALLATION

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1580012	Ref	TRAY ASSEMBLY	C
1	See Note	NSS	Tray, Storage (Center) (Note: Purchase p/n 1580012)	
2	0641406	2	Bolt 1/4 x 3/4	
3	4751400	2	Washer 1/4	
4	4761400	2	Washer 1/4	

SECTION 5 - PLATFORM

FIGURE 5-7. CONSOLE AND FOOTSWITCH INSTALLATION

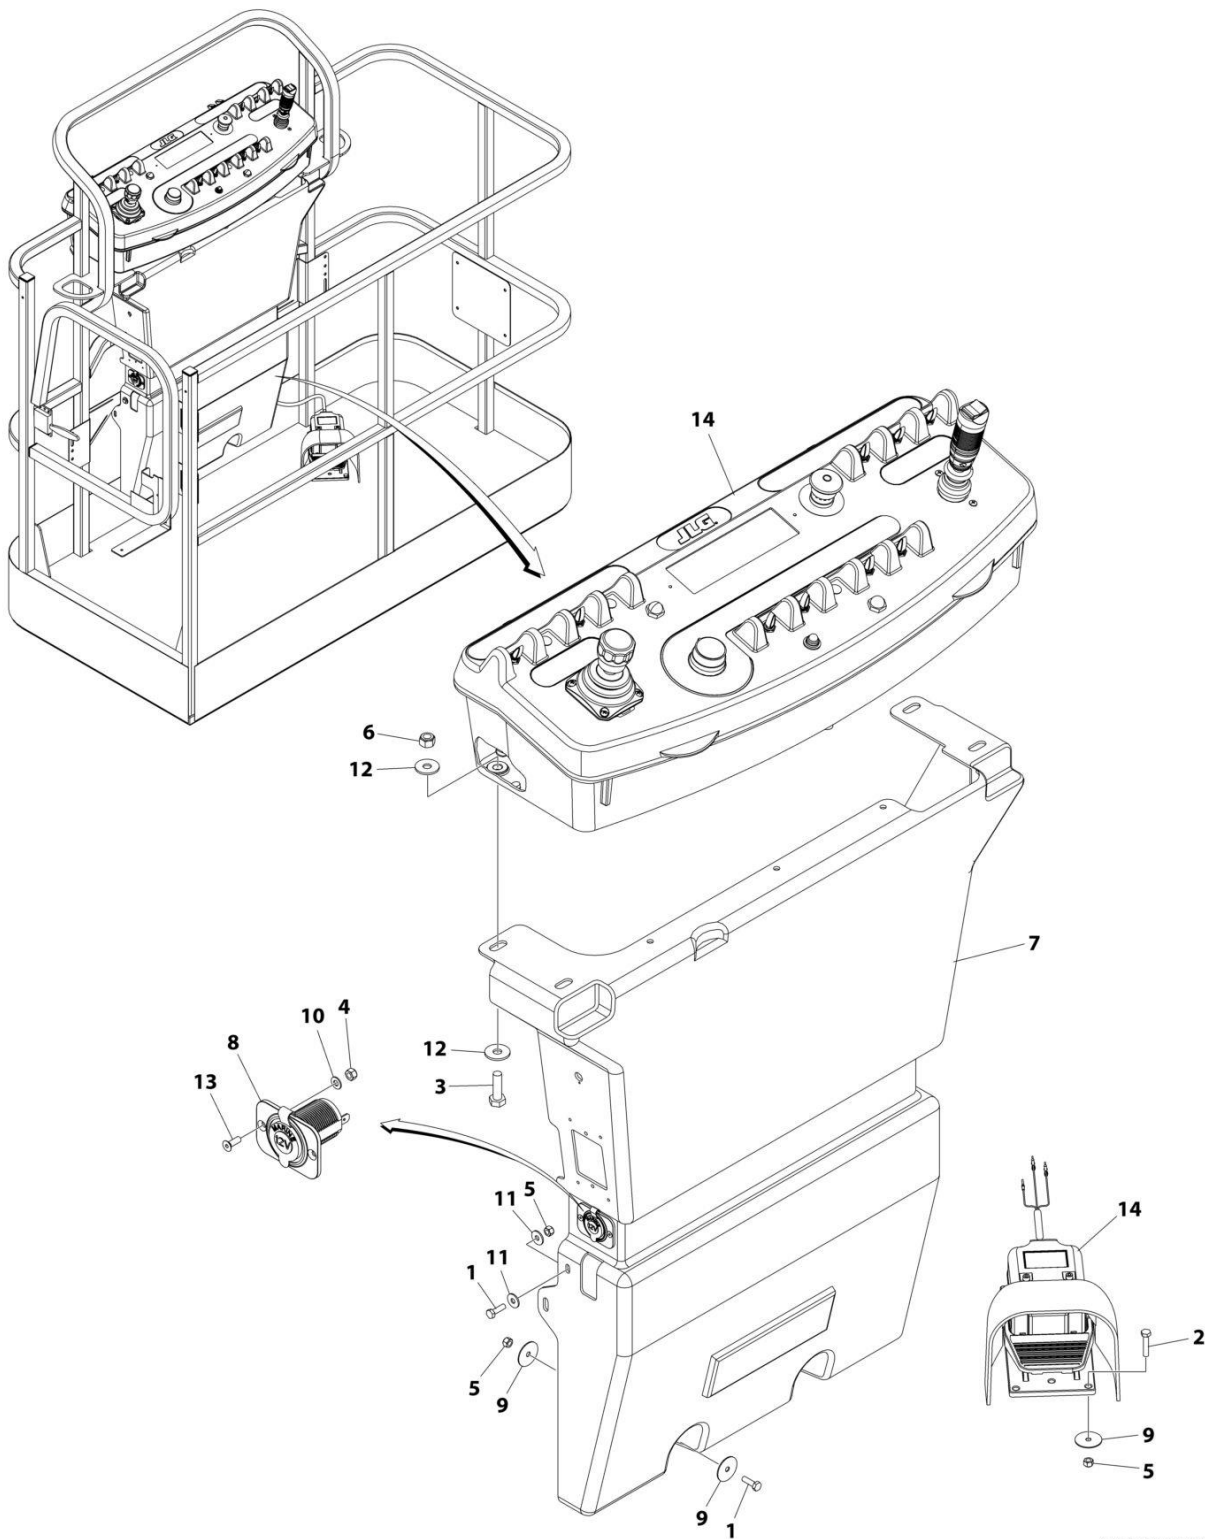

ART_1001247059


SECTION 5 - PLATFORM

FIGURE 5-7. CONSOLE AND FOOTSWITCH INSTALLATION

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001247059	Ref	CONSOLE AND FOOTSWITCH INSTALLATION	B
1	0700610	4	Bolt M6 x 20	
2	0760614	4	Bolt M6 x 30	
3	0761015	4	Bolt M10 x 35	
4	3290405	2	Nut M4	
5	3290605	8	Nut M6	
6	3291005	4	Nut M10	
7	3380434	1	Panel, Decal Mount	
8	4461012	1	Terminal, Receptacle	
9	4740362	8	Washer 1/4	
10	4811400	2	Washer M4	
11	4811702	4	Washer M6	
12	4812002	8	Washer M10	
13	1001097244	2	Screw M4 x 12	
14	1001247060	1	Console and Footswitch Assembly (See Separate Breakdown in this Section)	

SECTION 5 - PLATFORM

FIGURE 5-8. CONSOLE AND FOOTSWITCH ASSEMBLY

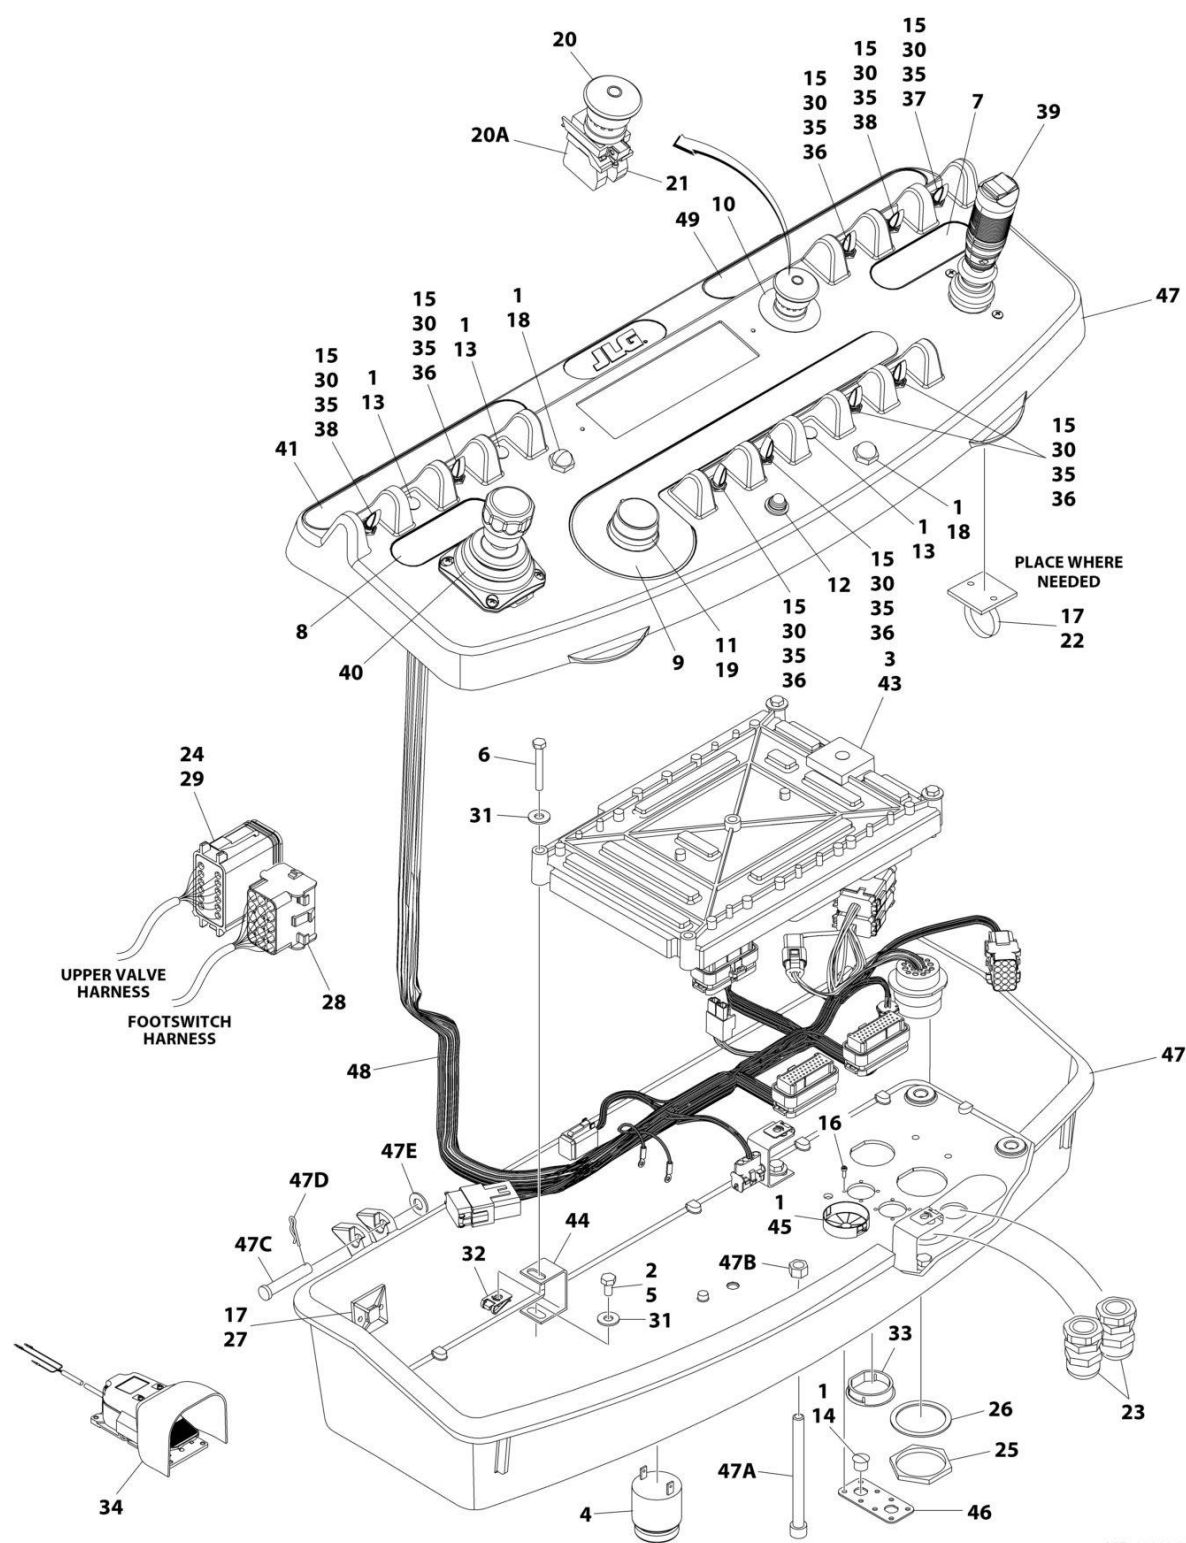

ART_1001247060

FIGURE 5-8. CONSOLE AND FOOTSWITCH ASSEMBLY


ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001247060	Ref	CONSOLE AND FOOTSWITCH ASSEMBLY	B
1	0100009	AR	Sealant	
2	0100035	AR	Compound, Locking	
3	0100048	AR	Grease, Dielectric	
4	0140011	1	Alarm	
5	0641404	4	Bolt 1/4 x 1/2	
6	0700617	4	Bolt M6 x 45	
7	1702565	1	Decal (Drive and Steer)	
8	1702566	1	Decal (Lift and Swing)	
9	1702567	1	Decal (Function Speed)	
10	1704260	1	Decal (EMS)	
11	2560136	1	Handle, Knob	
12	2920028	1	Lamp, Indicator	
13	3520028	3	Plug, Hole	
14	3520054	1	Plug, Hole	
15	3790012	9	O-Ring	
16	3900349	8	Capscrew M2.5	
17	4240032	AR	Tie-Strap (Not Shown)	
18	4360387	2	Switch, Pushbutton	
19	4360407	1	Controller, Speed	
19	4460224	1	Receptacle, Female - 6 Position	
19	4460226	6	Socket, Female	
19	See Note	NSS	Gasket "Top Hat" (Included with Switch) (Note: Not Available - Purchase Complete Controller.)	
19	70003784	1	Seal	
20	4360475	1	Switch, Emergency Stop	
20	7020175	1	Cap, Red	
20A	7020176	1	Contact Block	
21	4360476	1	Block, Contact	
22	4460234	3	Base, Mounting	
23	4460428	2	Connector, Strain Relief	
24	4460466	7	Seal, Plug	
25	4460470	1	Nut	
26	4460471	1	Washer	
27	4460488	2	Base, Mounting	
28	4460708	1	Receptacle, Female 15 Position	
29	4460933	1	Plug, Male - 12 Position	
30	4740397	9	Spacer	
31	4751400	8	Washer 1/4	
32	8305919	4	Retainer M6	
33	1001110434	1	Plug, Hole	
34	1001117174	1	Footswitch Assembly (Not Shown - See Separate Breakdown in this Section)	
35	1001155044	9	Nut 15/32	
36	1001155045	6	Switch, Toggle	
37	1001159256	1	Switch, Toggle	
38	1001161710	2	Switch, Toggle	
39	1001166538	NLA	Drive/Steer Controller Assembly (Use p/n 1001212415) (See Separate Breakdown in this Section)	
40	1001166539	NLA	Lift/Swing Controller Assembly (Use p/n 1001129555) (See	

SECTION 5 - PLATFORM

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
			Separate Breakdown in this Section)	
41	1001169092	1	Decal (Horn)	
42	1001169422	1	Platform to Boom Valves Harness Assembly (Not Shown - See Separate Breakdown in ELECTRICAL SECTION)	
43	1001169594	1	Module, Platform (Note: Re-calibration Required when Replaced)	
44	1001172760	4	Bracket, Support	
45	1001185281	1	Plug, Hole	
46	1001213882	1	Mount	
47	1001215228	1	Box, Console	
47A	0630568	1	Capscrew 3/8 x 4-1/2	
47B	3311601	1	Nut 3/8	
47C	3430616	2	Pin	
47D	3470003	2	Pin, Cotter	
47E	4711600	2	Washer 3/8	
48	1001245668	1	Platform Console Harness Assembly (See Separate Breakdown in ELECTRICAL Section)	
49	1001247540	1	Decal - Stop and Start	

SECTION 5 - PLATFORM

FIGURE 5-9. LIGHT PANEL INSTALLATION

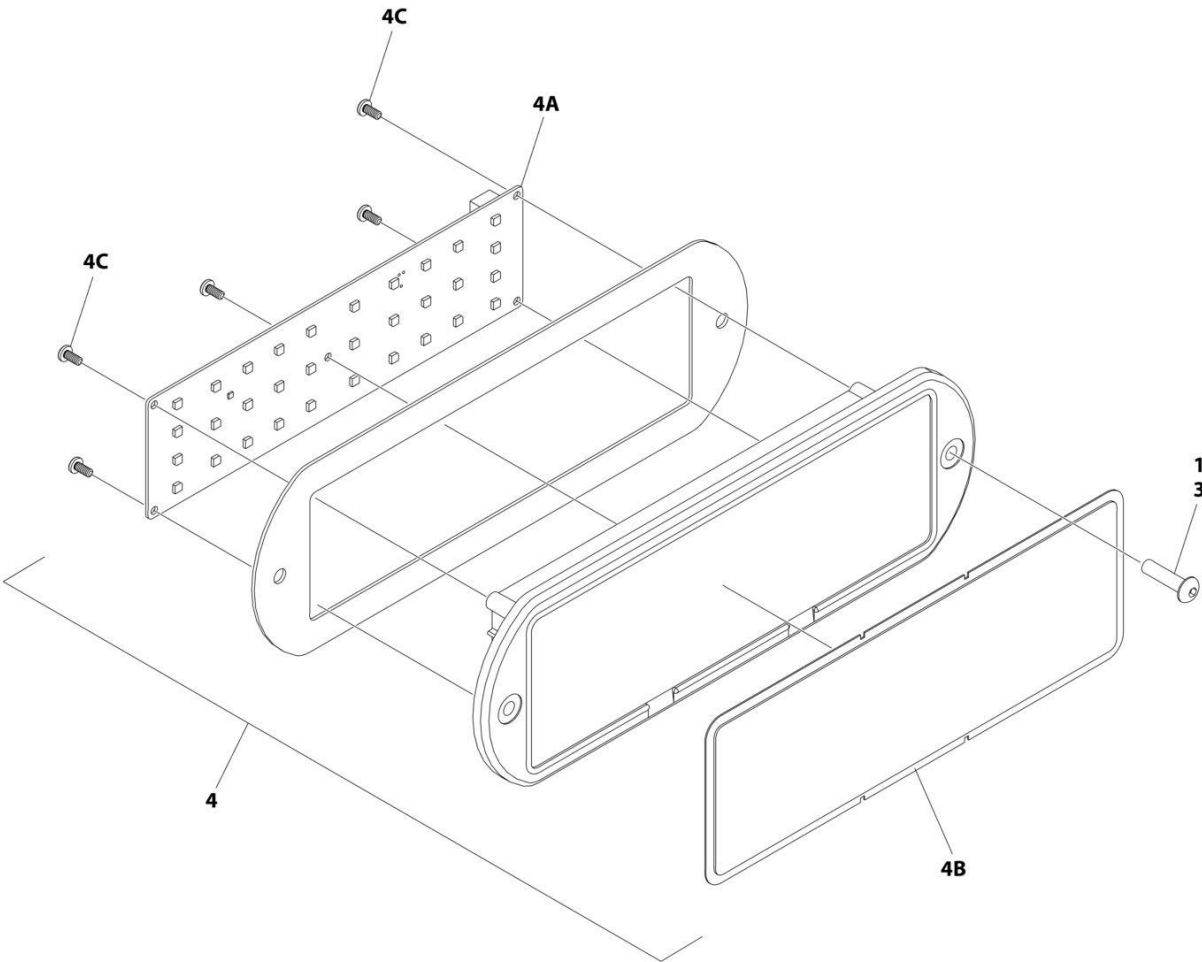

ART_1001245178_2OF2


SECTION 5 - PLATFORM

FIGURE 5-9. LIGHT PANEL INSTALLATION

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001245178	Ref	LIGHT PANEL INSTALLATION - PLATFORM CONSOLE	B
1	0100035	AR	Compound, Locking	F
3	0630518	1	Screw #10 x 3/4	
5	1001245207	1	Light Panel Assembly	
4A	1001238732	1	Panel, LED Light	
4B	1001245161	1	Lens, I-Con	
4C		Ref	Screw	

SECTION 5 - PLATFORM

FIGURE 5-10. DRIVE/STEER CONTROLLER ASSEMBLY

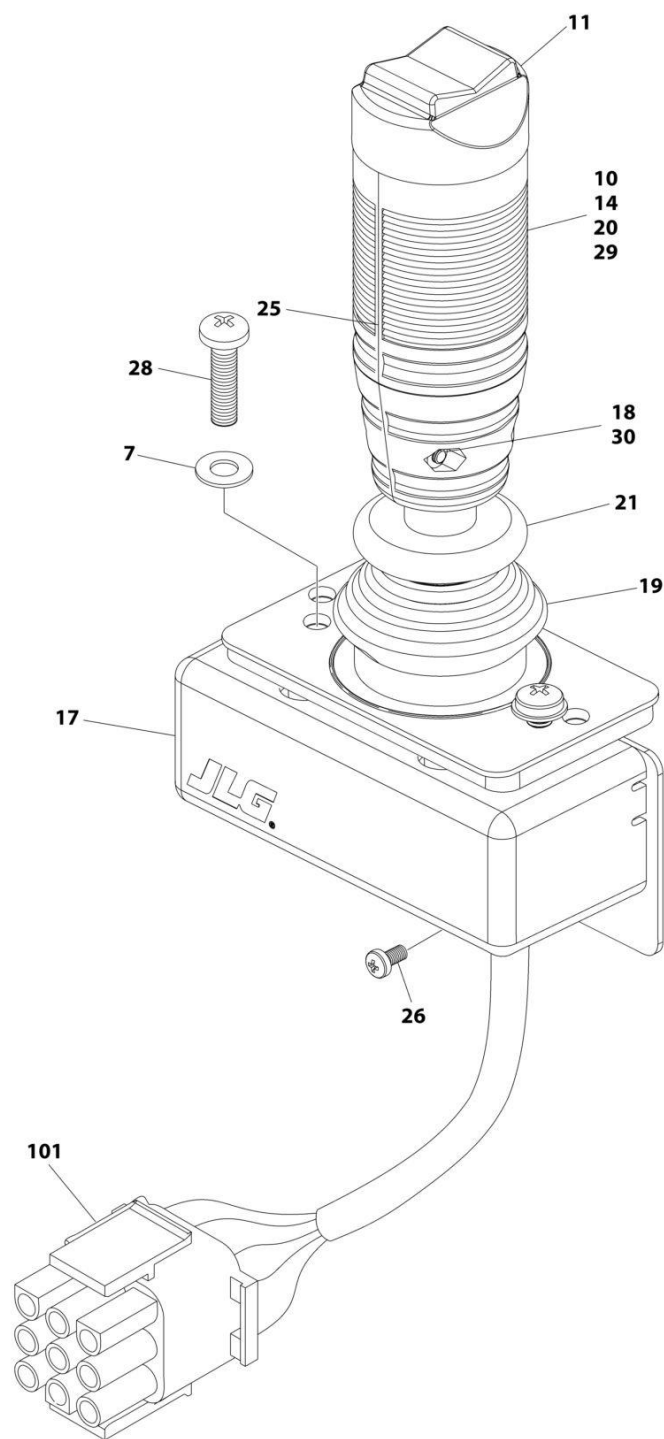

ART_1001166538


SECTION 5 - PLATFORM

FIGURE 5-10. DRIVE/STEER CONTROLLER ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001166538	Ref	CONTROLLER ASSEMBLY - DRIVE AND STEER	G
		Ref	Note: For Replacement, Use p/n 1001212415.	
7	70004738	2	Washer	
10	70004739	1	Roller	
11	70004740	1	Boot, Switch	
14	70004741	2	Half, Handle	
17	70004742	1	Enclosure	
18	70004743	4	Nut	
19	70004744	NLA	Boot, Controller (Use p/n 70005230 Boot/Base Assembly)	
20	70004745	NLA	Tube, Locking (Use p/n 70005230 Boot/Base Assembly)	
21	70004746	NLA	Disc, Locking (Use p/n 70005230 Boot/Base Assembly)	
25	70004747	2	Seal, Rope	
26	70004748	1	Screw M3 x 6	
28	70004749	2	Screw M5 x 20	
29	70004750	1	Pin, Dowel	
30	70004751	4	Screw M3 x 16	
101	4460265	1	Connector - 9 Position	
101	4460226	7	Socket, Female	

SECTION 5 - PLATFORM

FIGURE 5-11. LIFT/SWING CONTROLLER ASSEMBLY

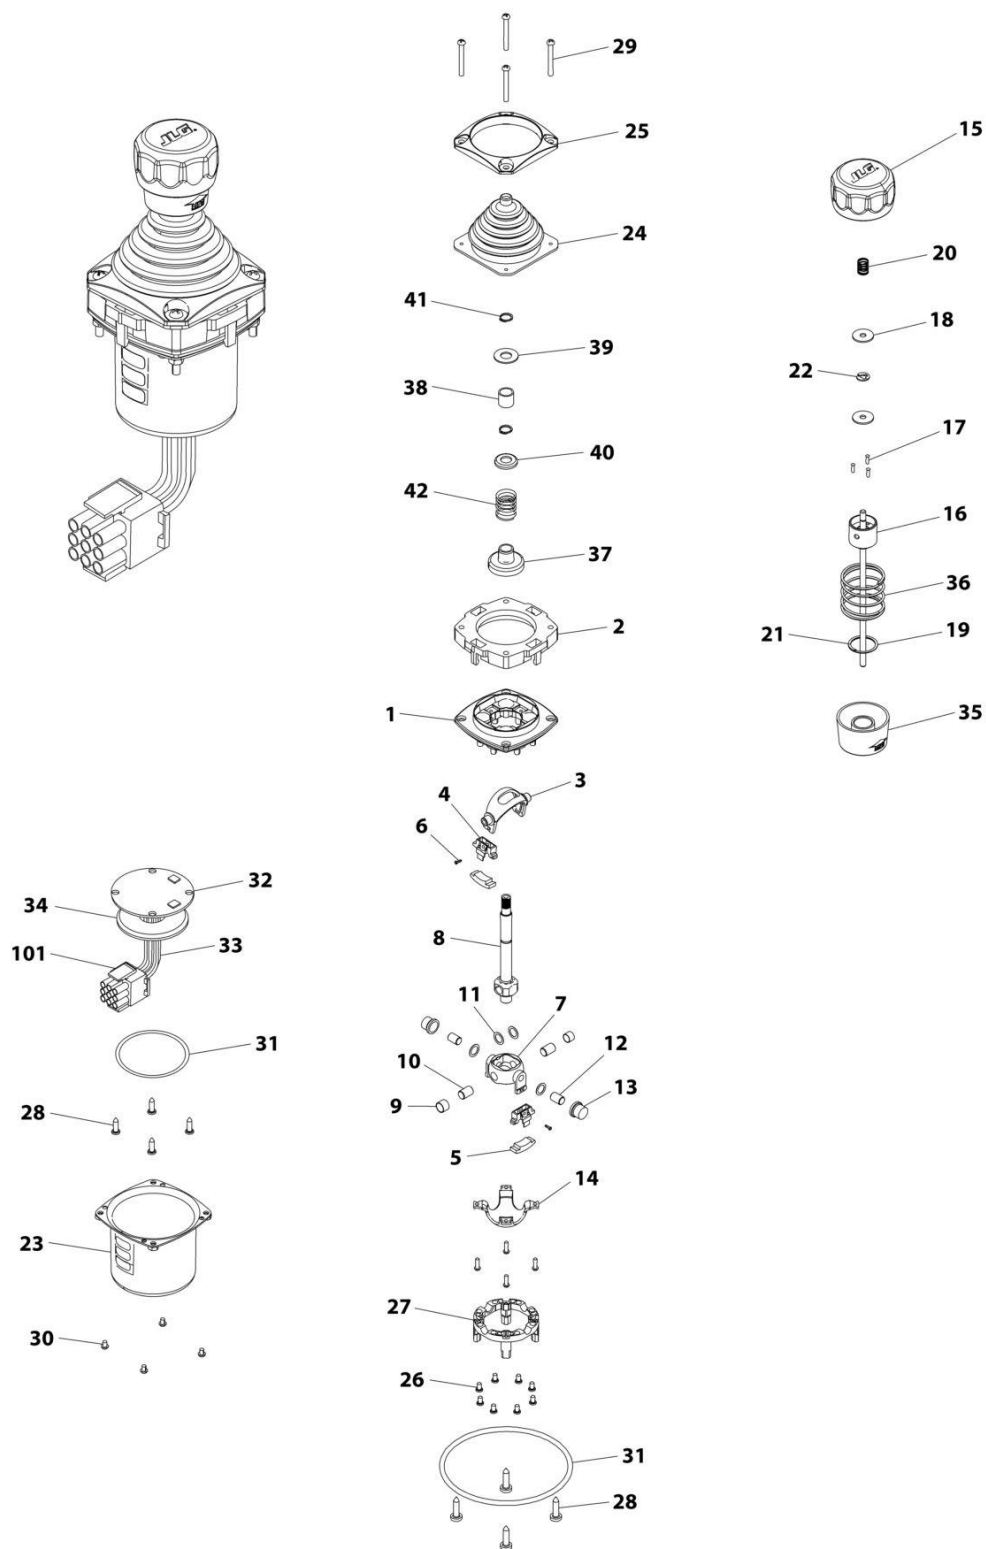

ART_1001166539

SECTION 5 - PLATFORM

FIGURE 5-11. LIFT/SWING CONTROLLER ASSEMBLY


ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001166539	Ref	CONTROLLER ASSEMBLY	D
		Ref	Note: Original Equipment Controller May Have Been Replaced with Service Replacement Controller. Visually Identify Controller Before Ordering Parts.	
		Ref	Note: For Replacement, Use p/n 1001129555	
1	See Note	NSS	Main Cast Body (Note: Not Available - Purchase Complete Assembly)	
2	70004752	1	Adapter	
3	See Note	NSS	Pivot Arm, Plastic (Note: Not Available - Purchase Complete Assembly)	
4	See Note	NSS	Holder, Magnet (Note: Not Available - Purchase Complete Assembly)	
5	See Note	NSS	Arc, Magnet (Note: Not Available - Purchase Complete Assembly)	
6	See Note	NSS	Screw (Note: Not Available for Purchase)	
7	See Note	NSS	Pivot Arm, Cast (Note: Not Available - Purchase Complete Assembly)	
8	See Note	NSS	Shaft, Main (Note: Not Available - Purchase Complete Assembly)	
9	See Note	NSS	Bearing (Note: Not Available - Purchase Complete Assembly)	
10	See Note	NSS	Pin (Note: Not Available - Purchase Complete Assembly)	
11	See Note	NSS	Shim (Note: Not Available - Purchase Complete Assembly)	
12	See Note	NSS	Pin (Note: Not Available - Purchase Complete Assembly)	
13	See Note	NSS	Bearing (Note: Not Available - Purchase Complete Assembly)	
14	See Note	NSS	Dome, Centering (Note: Not Available - Purchase Complete Assembly)	
15	70004753	1	Cap	
16	70004754	1	Insert, Cap	
17	70004755	3	Pin	
18	70004756	2	Washer	
19	70004757	1	Pin, Centering	
20	70004758	1	Spring	
21	70004759	1	Ring, Retaining	
22	70004760	1	E-Ring	
23	70004761	1	Can, Enclosure	
24	70004762	1	Boot	
25	70004763	1	Bezel	
26	See Note	NSS	Screw (Note: Not Available for Purchase)	
27	See Note	NSS	Base Mounting (Note: Not Available - Purchase Complete Assembly)	
28	See Note	NSS	Screw (Note: Not Available for Purchase)	
29	70004764	4	Screw	
30	70004765	4	Screw	
31	70004766	1	O-Ring	
32	See Note	NSS	Plate (Note: Not Available - Purchase Complete Assembly)	
33	See Note	NSS	Harness (Note: Not Available - Purchase Complete Assembly)	
34	70004767	1	Grommet, Rubber	
35	70004768	1	Housing	
36	70004769	1	Spring	
37	70004770	1	Stopper	
38	70004771	1	Spacer	
39	70004772	1	Washer	
40	70004773	1	Disc	

SECTION 5 - PLATFORM

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
41	70004774	2	Ring, Retaining	
42	70004775	1	Spring	
101	4460265	1	Connector - 9 Position	
101	4460226	6	Socket, Female	

SECTION 5 - PLATFORM

FIGURE 5-12. FOOTSWITCH ASSEMBLY

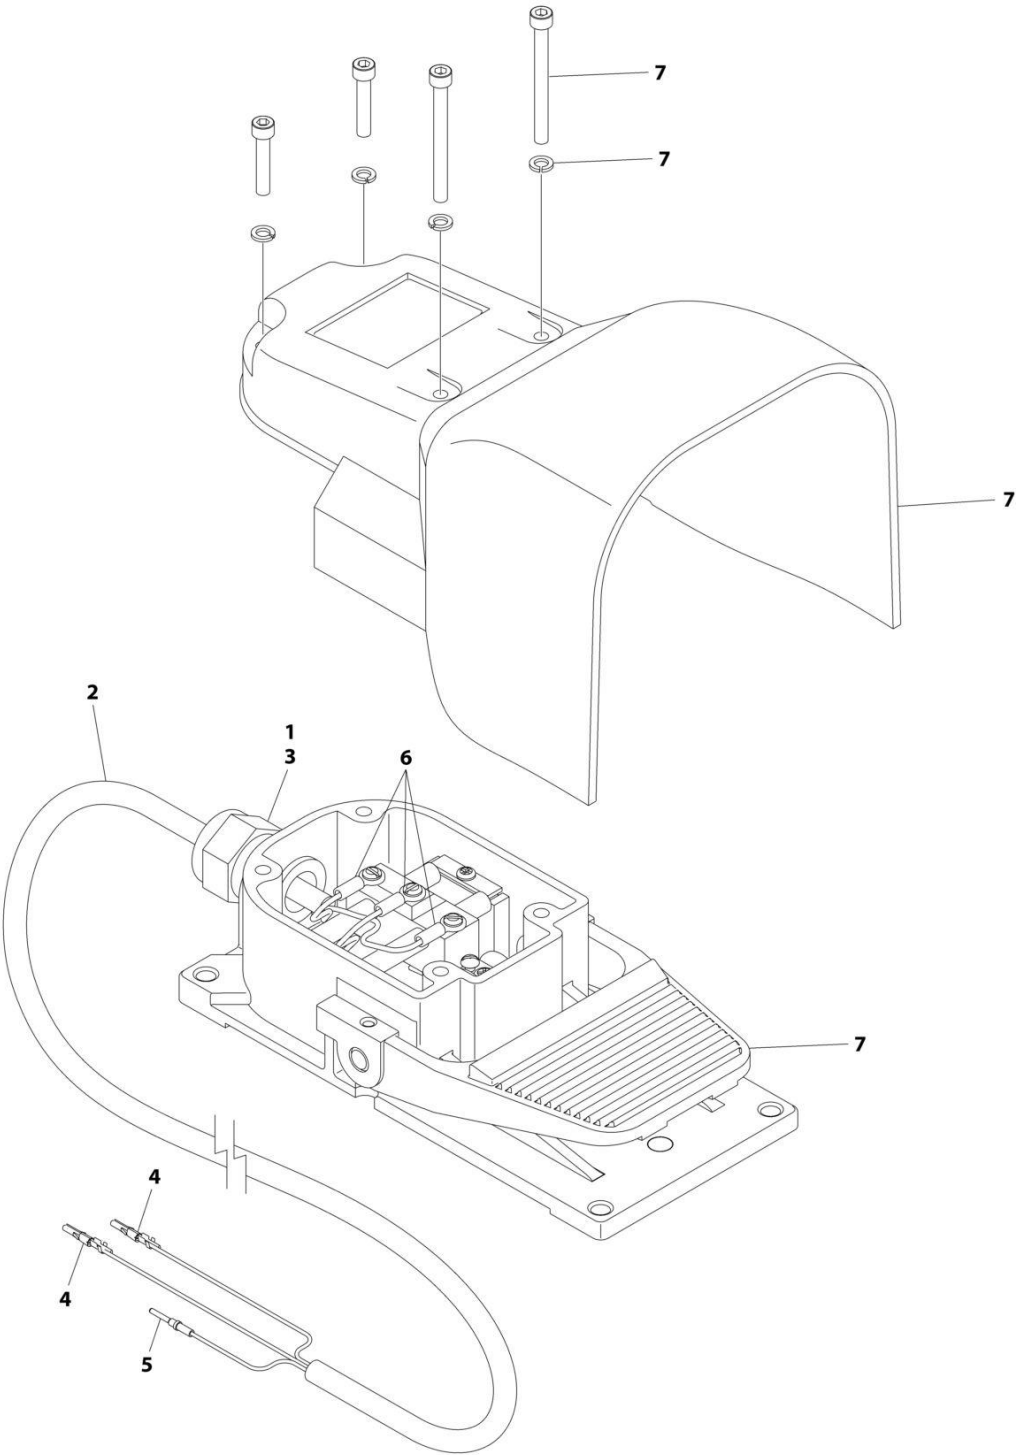


ART_1001117174

FIGURE 5-12. FOOTSWITCH ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001117174	Ref	FOOTSWITCH ASSEMBLY	B
1	0100020	AR	Sealant	
2	1060918	7.5 ft/ 2.3m	Cable, Electrical - 18/3	
3	4460071	1	Connector, Strain Relief	
4	4460226	2	Socket, Female	
5	4460464	1	Pin, Male	
6	1001098122	3	Terminal	
7	1001117172	1	Footswitch	
7	70002902	1	Switch, 20Amp	
7	70002903	1	Gasket	
7	70002905	1	Cover	
7	70002904	1	Kit, Replacement Bolt	

SECTION 5 - PLATFORM

FIGURE 5-13. SKYGUARD SYSTEM INSTALLATION

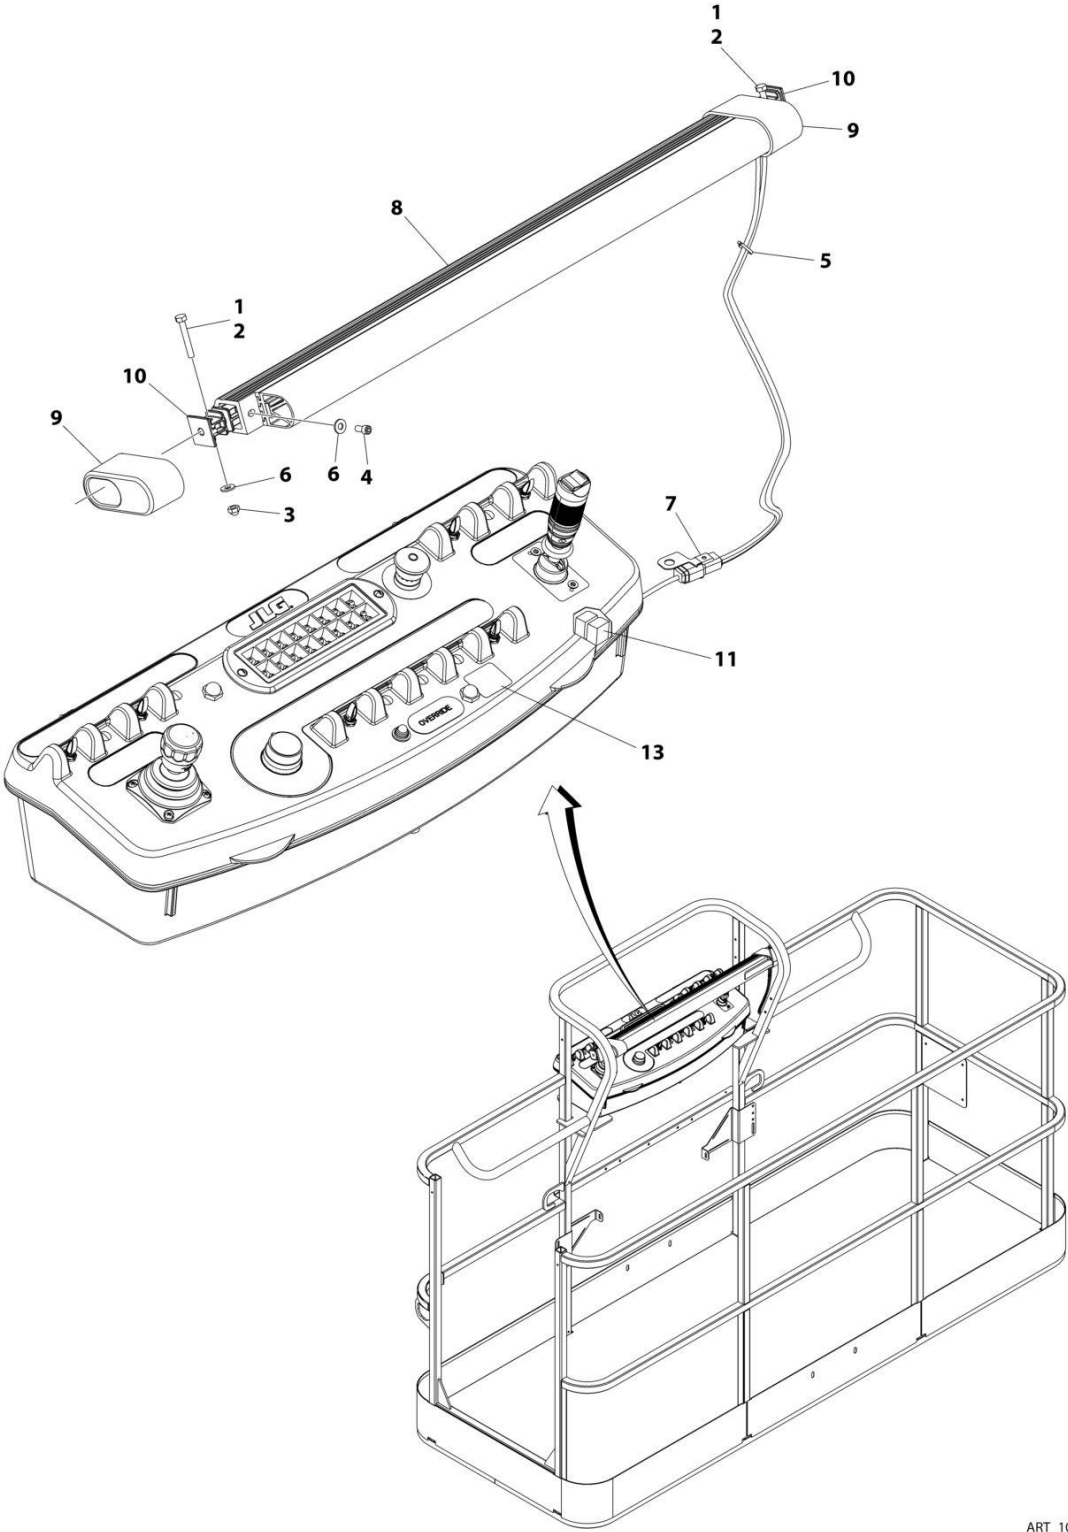


ART_1001238495

FIGURE 5-13. SKYGUARD SYSTEM INSTALLATION

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001238495	Ref	SKYGUARD BAR INSTALLATION	A
1	0100011	AR	Compound, Locking	
2	0641414	2	Bolt 1/4 x 1-3/4	
3	3300430	2	Nut 1/4	
4	3931408	2	Capscrew 1/4 x 1/2	
5	4240033	8	Tie-Strap	
6	4711400	6	Washer 1/4	
7	1001120328	1	Mount	
8	1001137673	1	SkyGuard Switch Assembly	
9	1001186517	2	Cover, Platform Sensor	
10	1001209664	2	Support, Block	
11	1001186431	2	Relay	
12	1001225580	1	Interface Harness Assembly (Not Shown - Located Inside Console Box) (See Separate Breakdown in ELECTRICAL Section)	
13	1001144433	1	Decal - No Weight SkyGuard	

SECTION 5 - PLATFORM

FIGURE 5-14. SKYEYE INSTALLATION

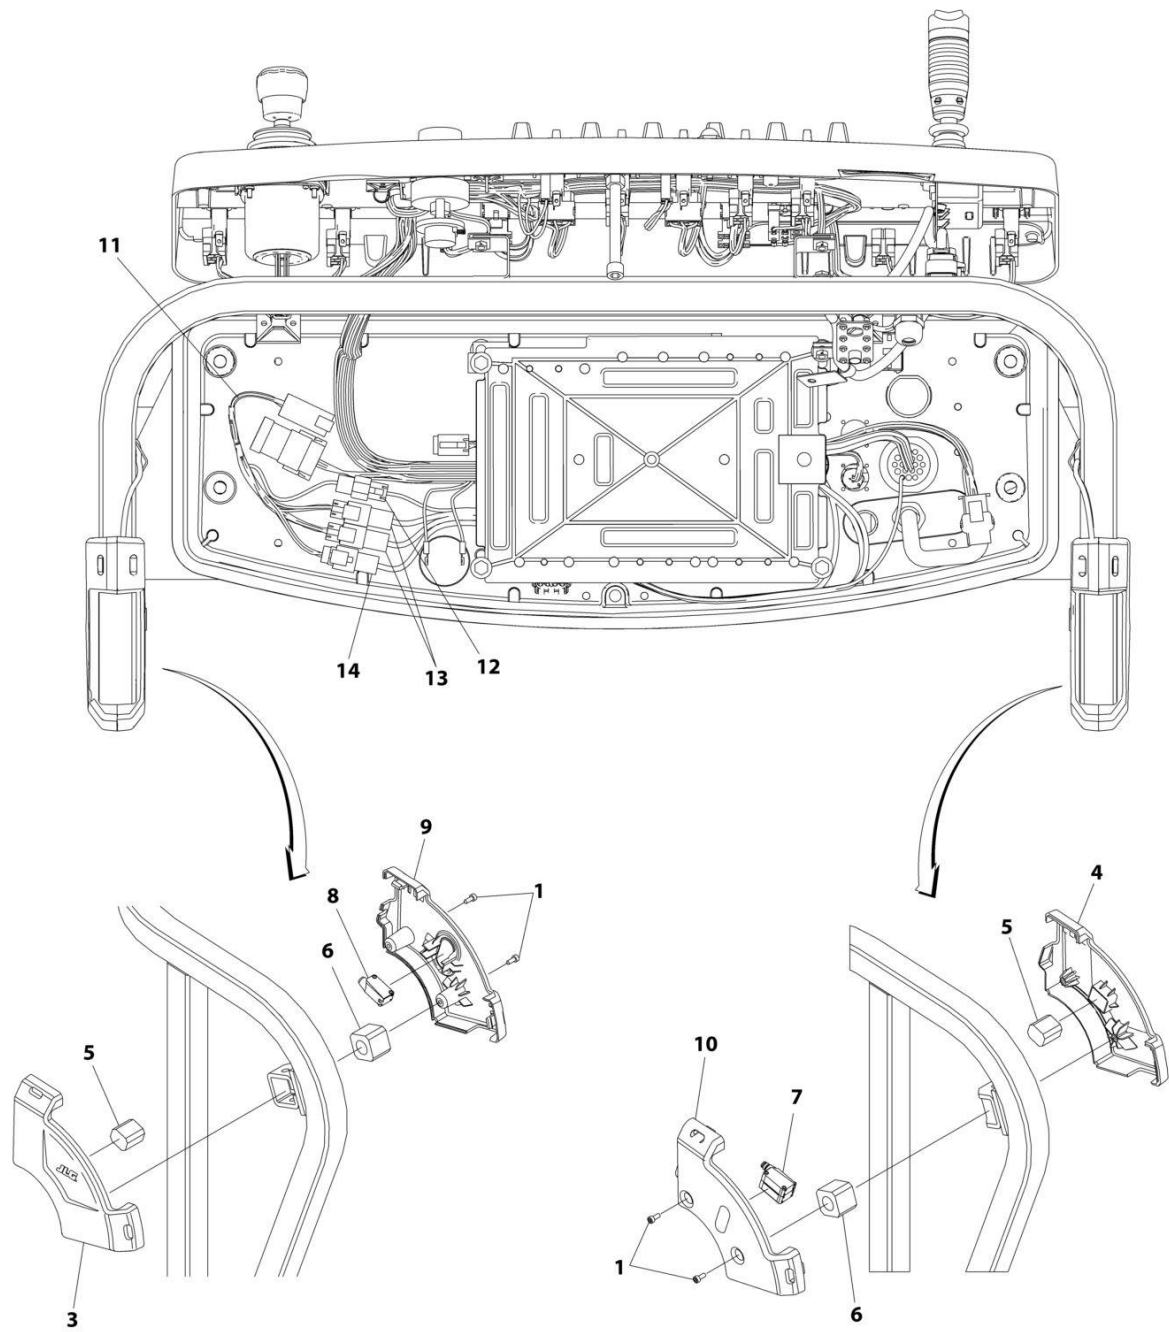


ART_1001229341

FIGURE 5-14. SKYEYE INSTALLATION

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001229341	Ref	SKYEYE INSTALLATION	A
1	4031505	4	Bolt M4 x 10	
2	4240033	AR	Tie-Strap (Not Shown)	
3	1001227633	1	Housing, LH Outer	
4	1001227634	1	Housing, RH Outer	
5	1001227985	2	Shim	
6	1001227987	2	Shim	
7	1001228224	2	Sensor, Receiver	
8	1001228225	1	Sensor, Emitter	
9	1001232164	1	Housing, LH Inner	
10	1001232165	1	Housing, RH Inner	
11	1001237865	1	Harness, Skyeye Intermediate (See Separate Breakdown in ELECTRICAL Section)	
12	1001238319	1	Harness, Skyeye Drain Jumper	
12	1001187674	1	Plug, Male - 2 Position	
12	4460942	1	Terminal	
12	4460466	1	Plug, Terminal	
12	4460508	1	Pin, Male	
13	1001237863	2	Harness, Skyeye Receiver (See Separate Breakdown in ELECTRICAL Section)	
14	1001237864	1	Harness, Skyeye Emitter (See Separate Breakdown in ELECTRICAL Section)	

SECTION 5 - PLATFORM

FIGURE 5-15. SKYLINE INSTALLATION

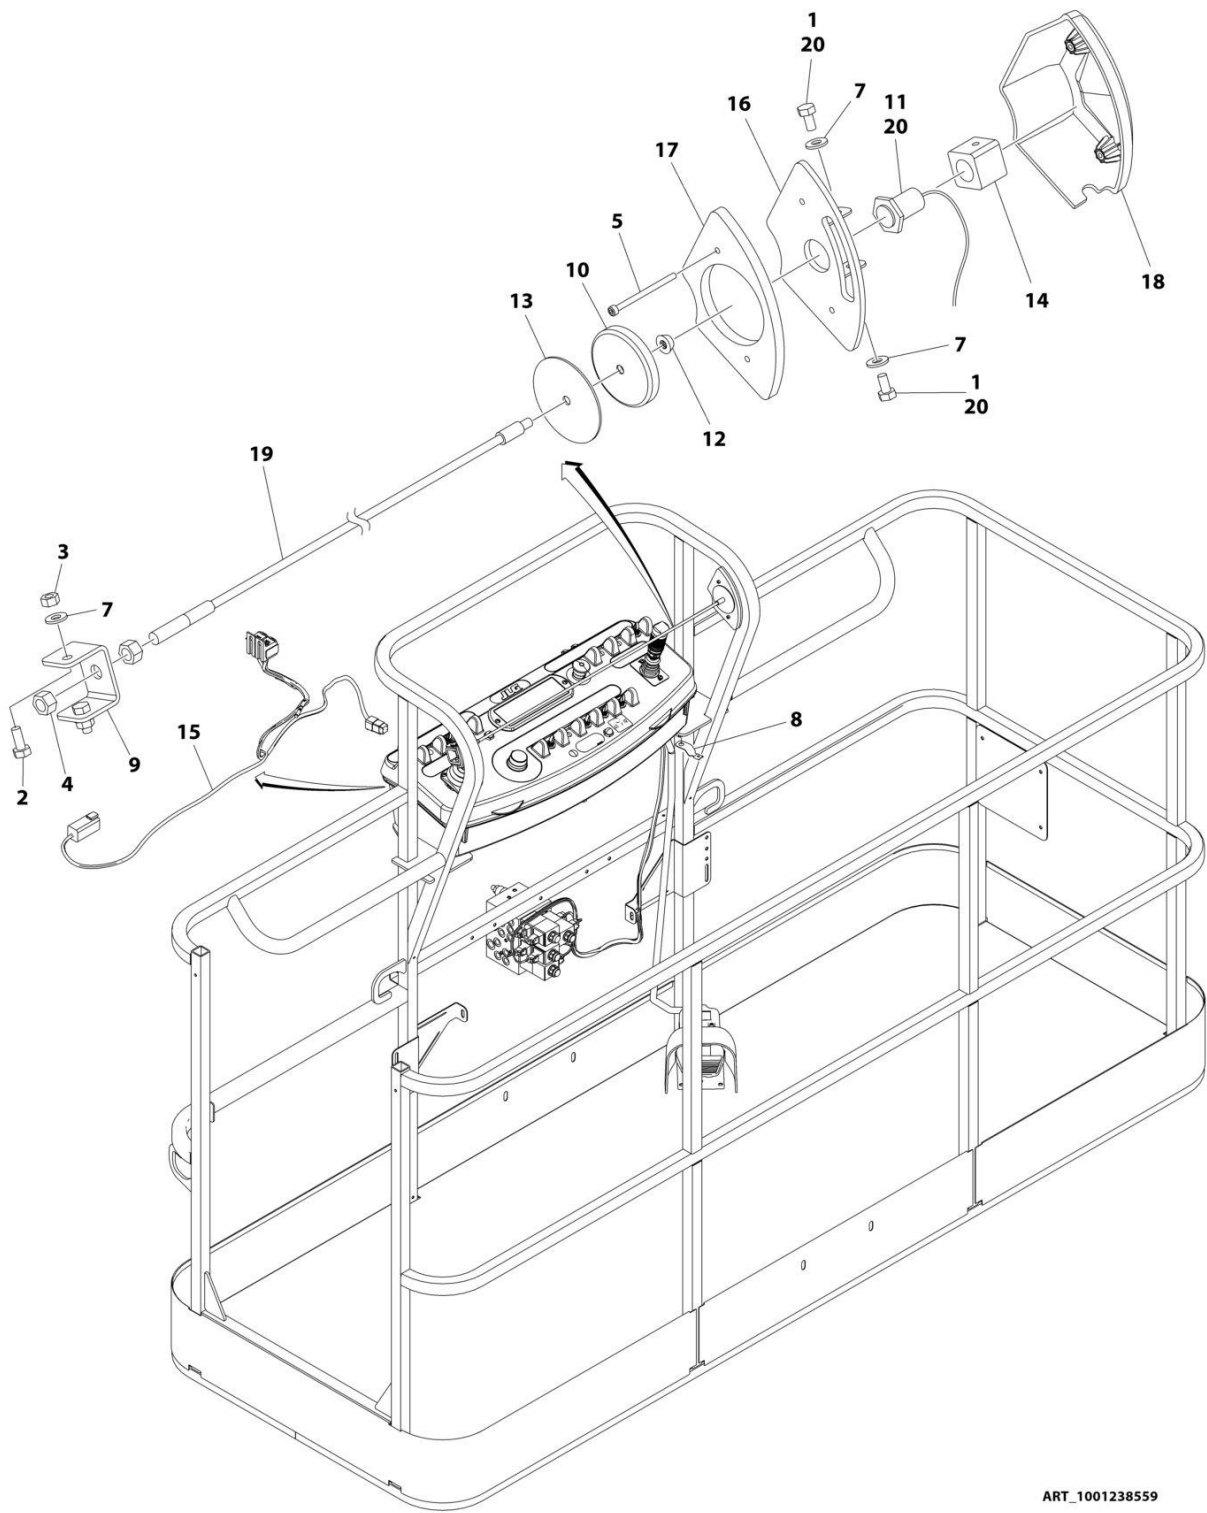


ART_1001238559

FIGURE 5-15. SKYLINE INSTALLATION

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001238559	Ref	SKYLINE INSTALLATION	B
1	0641404	2	Bolt 1/4 x 1/2	
2	0641405	2	Bolt 1/4 x 5/8	
3	3311405	2	Nut 1/4	
4	3311601	2	Nut 3/8	
5	4031516	2	Capscrew M4 x 60	
6	4240033	AR	Tie-Strap (Not Shown)	
7	4711400	4	Washer 1/4	
8	1001120328	1	Mount	
9	1001232642	1	Bracket	
10	1001232650	1	Magnet	
11	1001232667	1	Sensor, Proximity	
12	1001235011	1	Nut	
13	1001235013	1	Washer	
14	1001236552	1	Block	
15	1001238418	1	Harness, Skyline (See Separate Breakdown in ELECTRICAL Section)	
16	1001238472	1	Mount	
17	1001238477	1	Housing, LH	
18	1001241965	1	Housing, RH	
19	1001238824	1	Rope	
20	0100011	AR	Compound, Locking	

SECTION 5 - PLATFORM

FIGURE 5-16. PIPE RACK INSTALLATION (AUSTRALIAN SPECS)

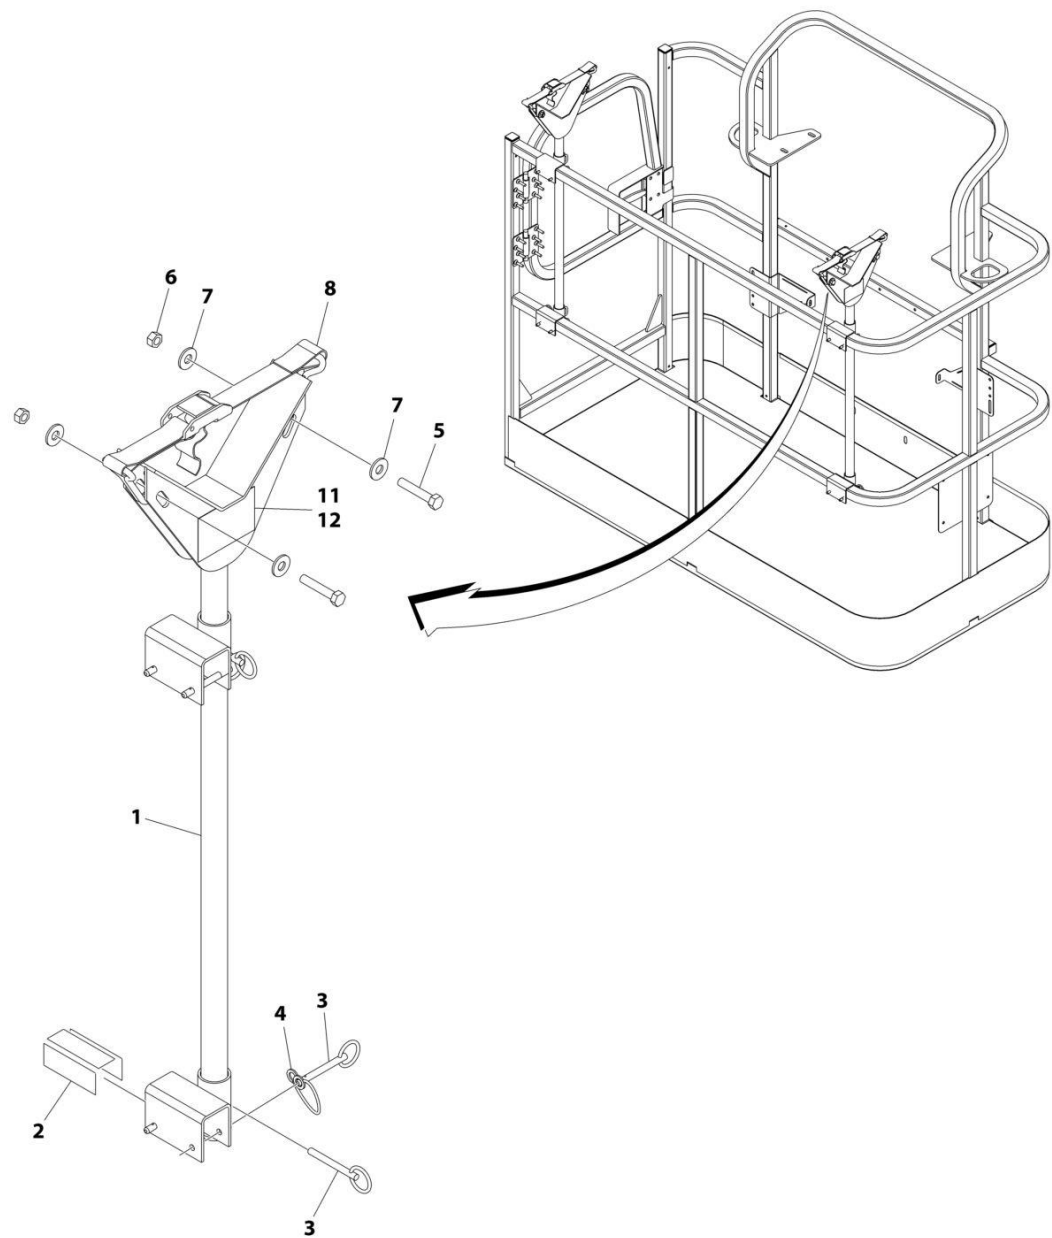

ART_0274661_C


SECTION 5 - PLATFORM

FIGURE 5-16. PIPE RACK INSTALLATION (AUSTRALIAN SPECS)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	0274661	Ref	PIPE RACK INSTALLATION	C
1	4845582	2	Rack, Pipe	
2	4420062	AR	Tape	
3	3422661	10	Pin	
4	1060379	4	Lanyard	
5	0641514	4	Bolt 5/16 x 1-3/4	
6	3311505	4	Nut 5/16	
7	4751500	8	Washer 5/16	
8	0480100	2	Tie-Down	
12	1001252947	2	Decal - Capacity (2) (660-1000LBSS/299-454KG Zones)	

SECTION 5 - PLATFORM

FIGURE 5-17. FALL ARREST INSTALLATION (BOLT - ON EXTERNAL) 4FFT/1.22M PLATFORM)

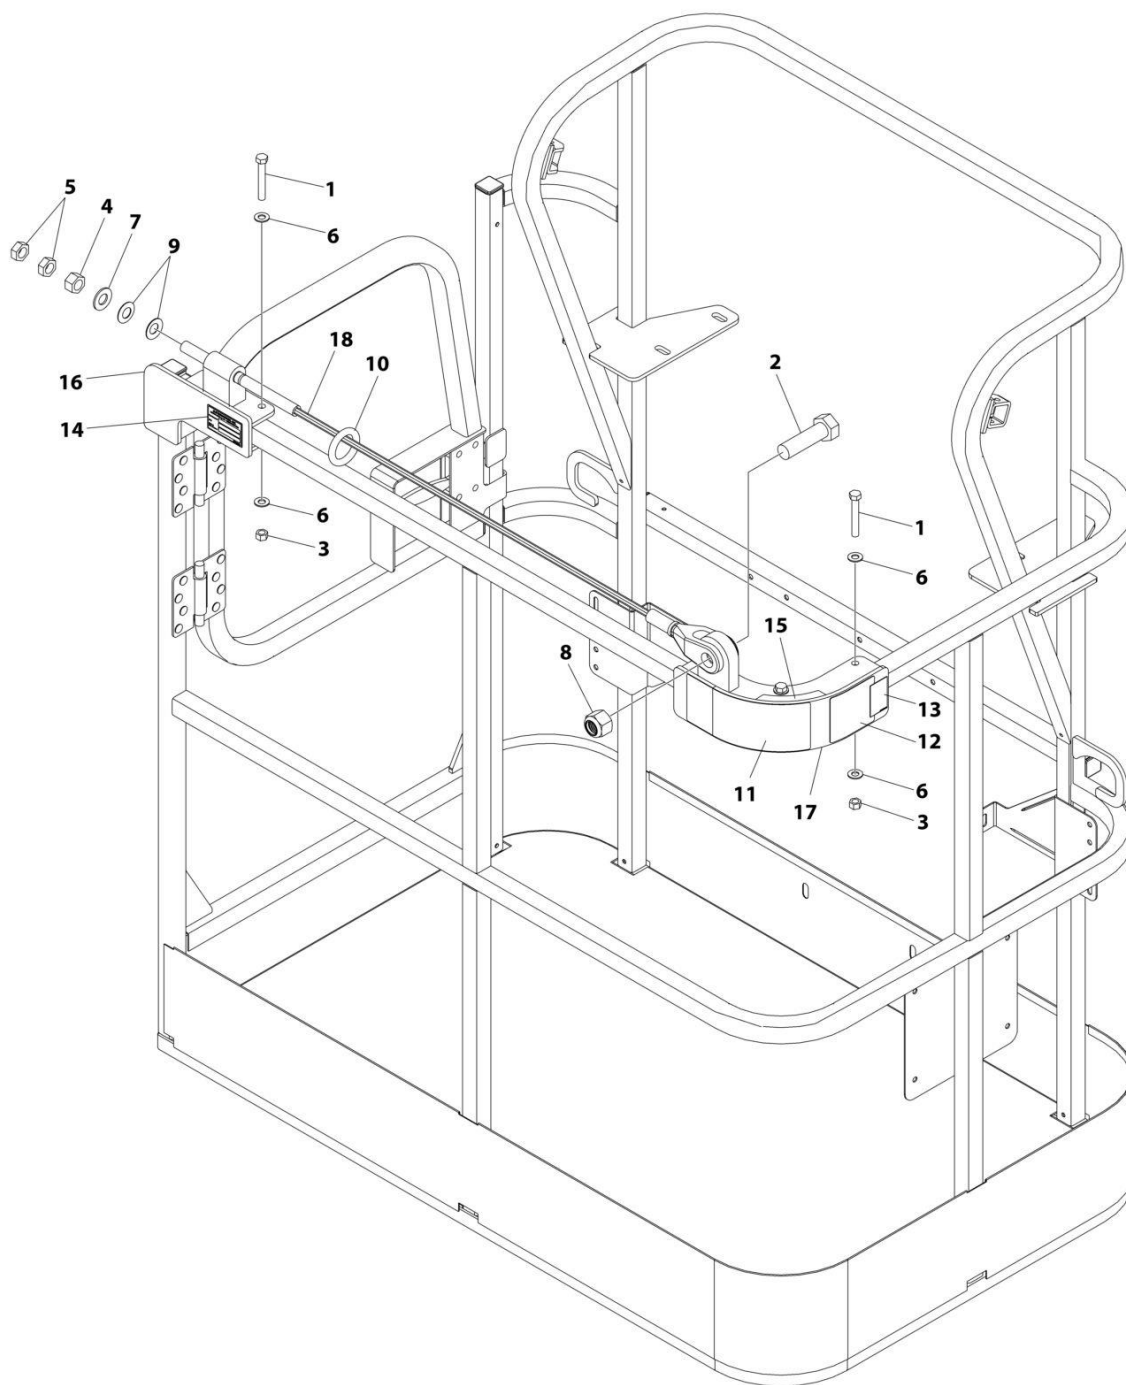

ART_1001261338


SECTION 5 - PLATFORM

FIGURE 5-17. FALL ARREST INSTALLATION (BOLT - ON EXTERNAL) 4FFT/1.22M PLATFORM)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001261338	Ref	FALL ARREST INSTALLATION	A
1	0681620	6	Bolt 3/8 x 2-1/2	
2	0682424	1	Bolt 7/8 x 3	
3	3271605	6	Nut 3/8	
4	3272001	1	Nut 5/8	
5	3312002	2	Nut 5/8	
6	4711600	12	Washer 3/8	
7	4712000	1	Washer 5/8	
8	88521214	1	Nut 7/8	
9	1001236891	2	Washer	
10	1001236895	1	Ring	
11	1001238263	1	Decal - Warning Falling Hazard	
12	1001248140	1	Decal - Bolt Fall Arrest Re-Cert	
13	1001248141	1	Decal - Incrption	
14	See Note	NSS	Nameplate - Manufacturers Serial Number (Note: Not Available for Purchase)	
15	1001252629	1	Decal - Weight	
16	1001257271	1	Bracket (RH)	
17	1001257274	1	Bracket (LH)	
18	1001261335	1	Rope	

SECTION 5 - PLATFORM

FIGURE 5-18. FALL ARREST INSTALLATION (BOLT-ON EXTERNAL) (5FT/1.52M PLATFORM)

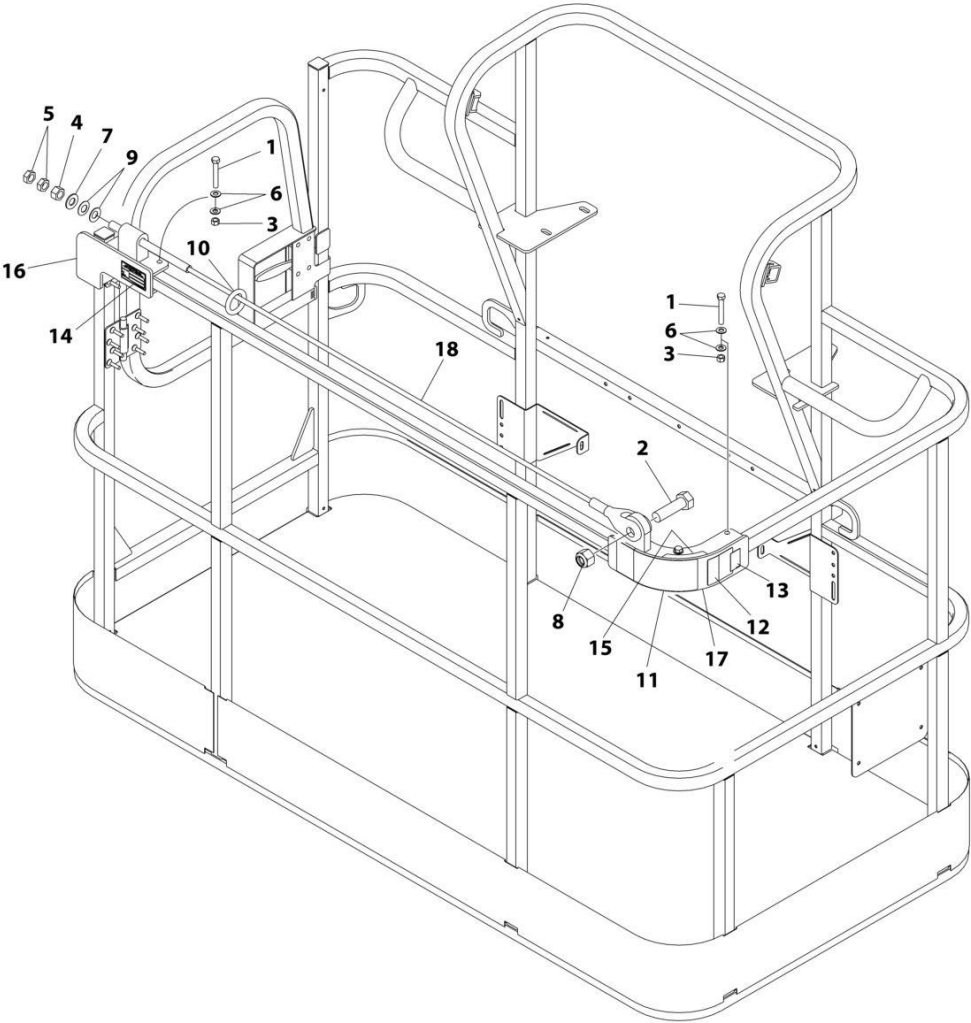

ART_1001257275

SECTION 5 - PLATFORM


FIGURE 5-18. FALL ARREST INSTALLATION (BOLT-ON EXTERNAL) (5FT/1.52M PLATFORM)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001257275	Ref	FALL ARREST INSTALLATION (BOLT - ON) 6FT/1.82M PLATFORM	A
1	0681620	6	Bolt 3/8 x 2-1/2	
2	0682424	1	Bolt 7/8 x 3	
3	3271605	6	Nut 3/8	
4	3272001	1	Nut 5/8	
5	3312002	2	Nut 5/8	
6	4711600	12	Washer 3/8	
7	4712000	1	Washer 5/8	
8	88521214	1	Nut 7/8	
9	1001236891	2	Washer	
10	1001236895	1	Ring	
11	1001238263	1	Decal - Warning Falling Hazard	
12	1001248140	1	Decal - Bolt Fall Arrest Re-Cert	
13	1001248141	1	Decal - Incription	
14	See Note	NSS	Nameplate - Manufacturers Serial Number (Note: Not Available for Purchase)	
15	1001252629	1	Decal - Weight	
16	1001257271	1	Bracket (RH)	
17	1001257274	1	Bracket (LH)	
18	1001258005	1	Rope	

SECTION 6 - CYLINDER

SECTION 6 - CYLINDER

FIGURE 6-1. AXLE LOCKOUT CYLINDER ASSEMBLY

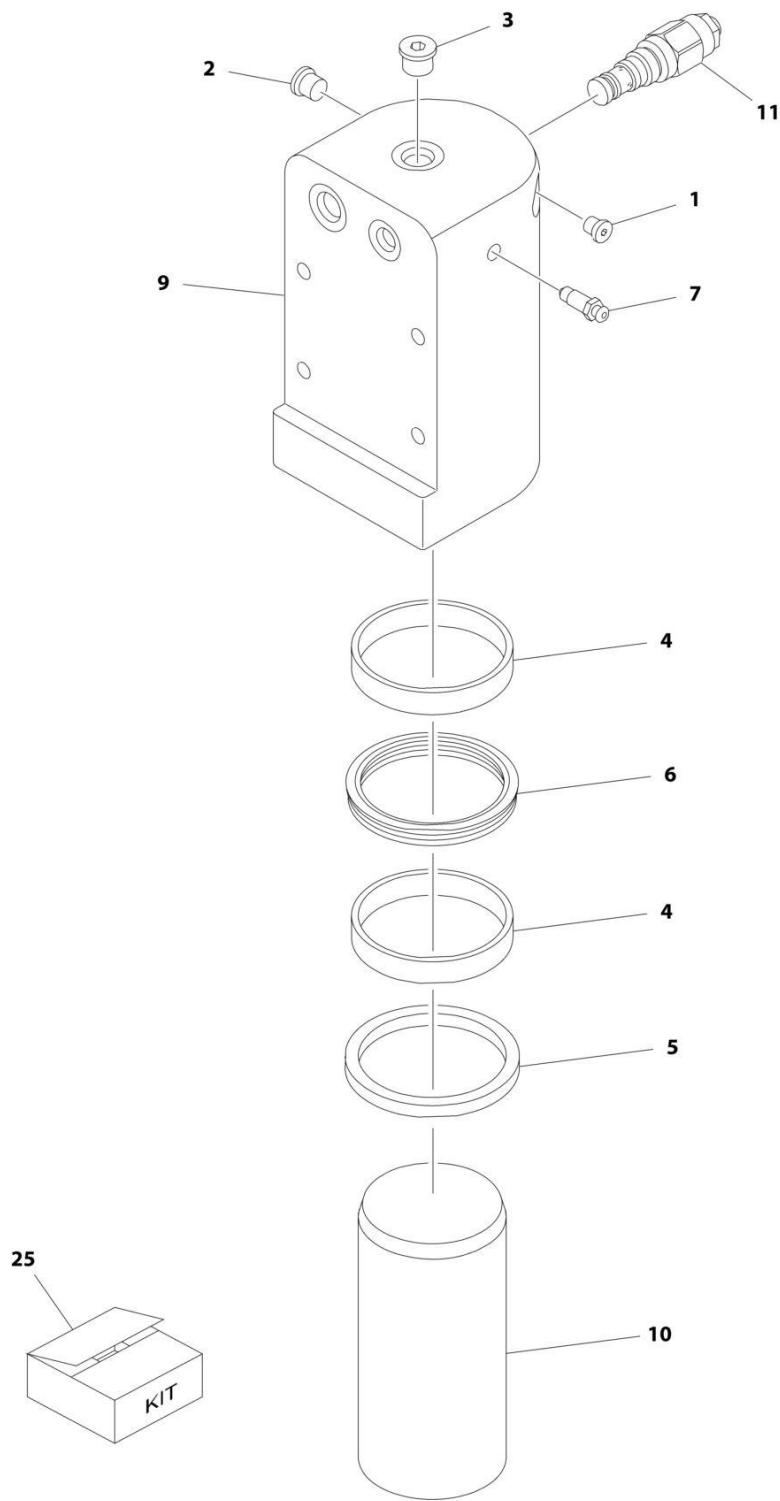

ART_1001116361


SECTION 6 - CYLINDER

FIGURE 6-1. AXLE LOCKOUT CYLINDER ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001116361	Ref	AXLE LOCKOUT CYLINDER ASSEMBLY	G
1	2220881	1	Plug, O-Ring	
2	2220883	1	Plug, O-Ring	
3	2220885	1	Plug, O-Ring	
4	See Note	NSS	Ring, Wear (Note: Use Item 25)	
5	See Note	NSS	Wiper (Note: Use Item 25)	
6	See Note	NSS	Seal, Rod (Note: Use Item 25)	
7	4640858	1	Bleeder	
9	1001117365	1	Barrel	
10	1001117366	1	Rod	
11	1001117372	1	Cartridge, Valve	
11	70002842	1	Seal Kit - 1001117372 Valve	
25	1001116378	1	Seal Kit (Includes Items 4-6)	

SECTION 6 - CYLINDER

FIGURE 6-2. LEVEL (PLATFORM SLAVE) CYLINDER ASSEMBLY

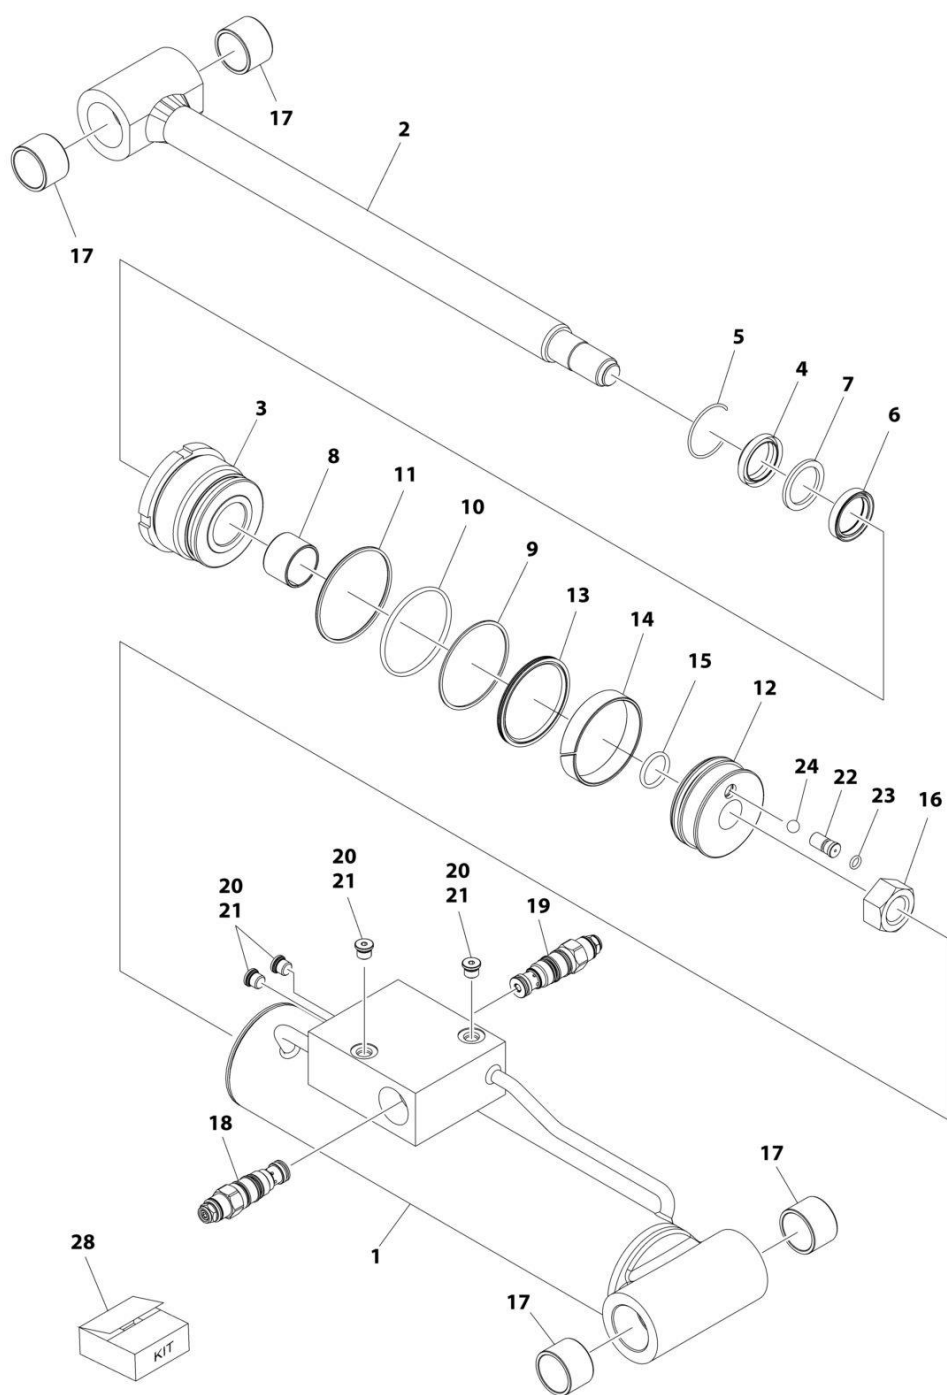

ART_1001225990


SECTION 6 - CYLINDER

FIGURE 6-2. LEVEL (PLATFORM SLAVE) CYLINDER ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001225990	Ref	LEVEL (PLATFORM SLAVE) CYLINDER ASSEMBLY	A
		Ref	Note: Original Cylinder may have been replaced with Service Replacement. Identify PN Stamped on Cylinder Before Ordering Parts.	
1	70003131	1	Barrel	
2	70003132	1	Rod	
3	70003085	1	Head	
4	See Note	NSS	Wiper (Note: Use Item 28)	
5	70002366	1	Ring, Retaining	
6	See Note	NSS	Seal, Rod (Note: Use Item 28)	
7	See Note	NSS	Ring, Back-up (Note: Use Item 28)	
8	70005695	1	Bearing	
9	See Note	NSS	O-Ring (Note: Use Item 28)	
10	See Note	NSS	Ring, Back-up (Note: Use Item 28)	
11	See Note	NSS	O-Ring (Note: Use Item 28)	
12	70003133	1	Piston	
13	See Note	NSS	Seal, Piston (Note: Use Item 28)	
14	See Note	NSS	Ring, Wear (Note: Use Item 28)	
15	See Note	NSS	Ring, Wear (Note: Use Item 28)	
16	70002335	1	Nut	
17	0961951	4	Bushing, Garmax	
18	70002413	1	Cartridge, Valve	
18	2900770	1	Seal Kit - 70002413 Valve	
19	1001168210	1	Cartridge, Valve	
19	2900770	1	Seal Kit - 1001168210 Valve	
20	2220883	4	Plug	
21	See Note	NSS	O-Ring (Note: Not Available - Purchase Locally)	
22	70005973	1	Valve Seat	
23	70005974	1	O-Ring	
24	70006353	1	Steel Ball	
28	70003134	1	Seal Kit (Includes Items 4, 6, 7, 9, 10, 11, 13, 14 & 15)	
100		Ref	REPAIR TOOLS (NOT SHOWN)	
100	70003089	1	Press, Wiper	
100	70003090	1	Press, Bushing (Use with Rod Bearing)	
100	70003091	1	Tool, Bushing Removal (Use with Rod Bearing)	
100	70003092	1	Tool, Head Seal Protection	
100	70003081	1	Tool, Piston Seal Protection	
100	70003093	1	Press, Bushing (Use with Pin Mounting Bushings)	
100	70003094	1	Tool, Bushing Removal (Use with Pin Mounting Bushings)	

SECTION 6 - CYLINDER

FIGURE 6-3. LIFT (JIB) CYLINDER ASSEMBLY

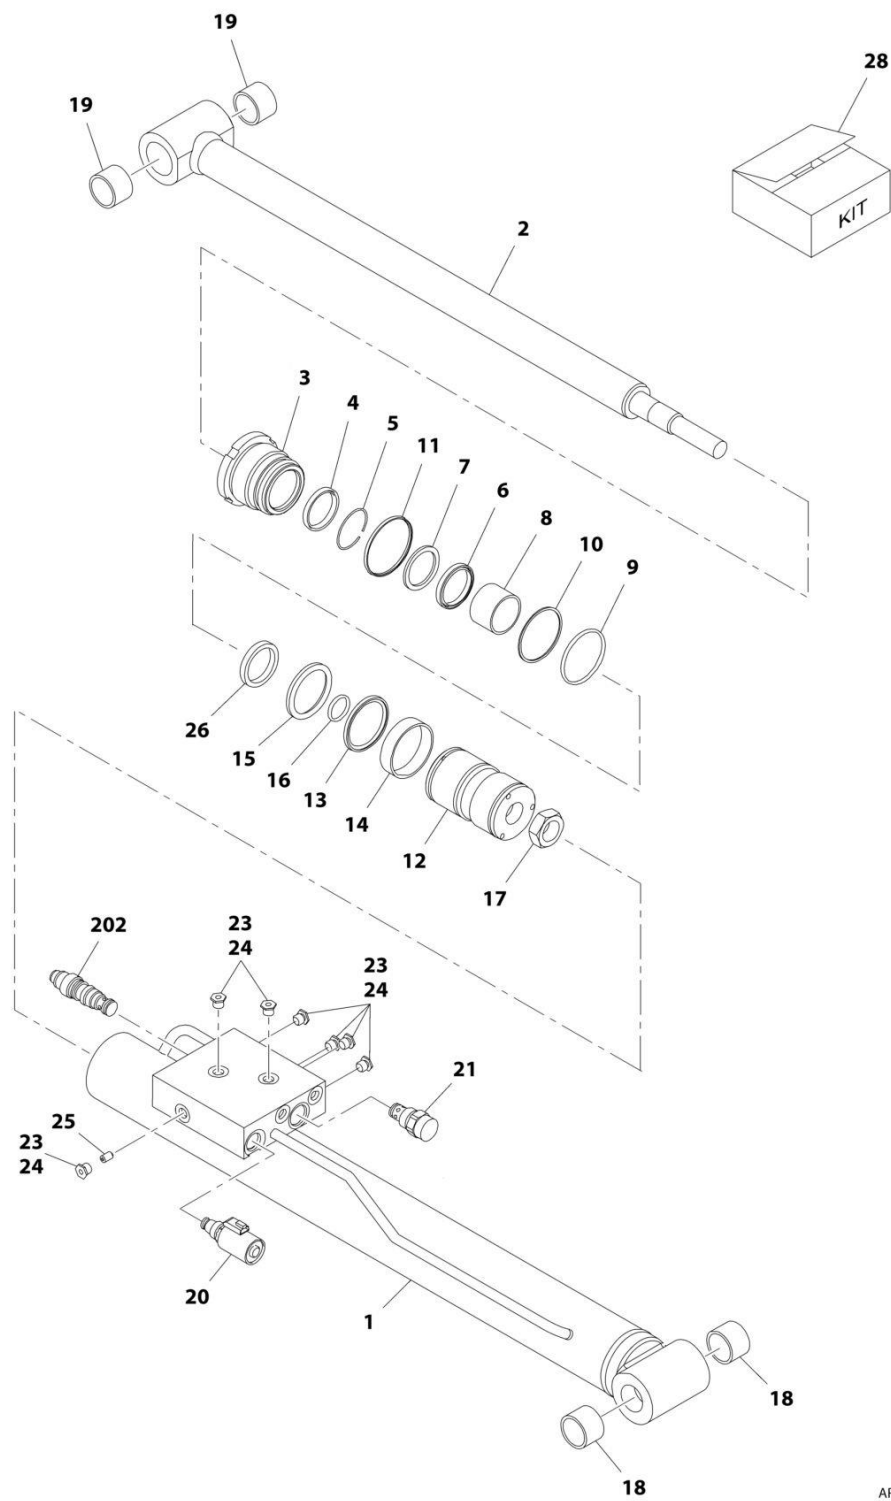

ART_1001123004


SECTION 6 - CYLINDER

FIGURE 6-3. LIFT (JIB) CYLINDER ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001123004	Ref	LIFT (JIB) CYLINDER ASSEMBLY	D
1	70003122	1	Barrel	
2	70002375	1	Rod	
3	70003123	1	Head	
4	See Note	NSS	Wiper (Note: Use Item 28)	
5	70002373	1	Ring, Retaining	
6	See Note	NSS	Seal, Rod (Note: Use Item 28)	
7	See Note	NSS	Ring, Back-up (Note: Use Item 28)	
8	70002372	1	Bearing	
9	See Note	NSS	O-Ring (Note: Use Item 28)	
10	See Note	NSS	Ring, Back-up (Note: Use Item 28)	
11	See Note	NSS	O-Ring (Note: Use Item 28)	
12	70003124	1	Piston	
13	70003125	1	Seal, Piston	
14	See Note	NSS	Ring, Wear (Note: Use Item 28)	
15	See Note	NSS	O-Ring (Note: Use Item 28)	
16	See Note	NSS	Ring, Piston (Note: Use Item 28)	
17	70002335	1	Nut	
18	70003118	2	Bushing	
19	0961951	2	Bushing, Garmax (was p/n 70003087)	
20	7024884	1	Cartridge, Solenoid Valve	
20	7012967	1	Seal Kit - 7024884 Valve	
20	70002386	1	Coil	
21	70003076	1	Cartridge, Check Valve	
21	7017496	1	Seal Kit - 70003076 Valve	
23	70023370	7	Plug	
24	See Note	7	O-Ring (Note: Not Available - Purchase Locally)	
25	70002334	1	Orifice	
26	70003453	1	Spacer	
28	70003125	1	Seal Kit (Includes Items 4, 6, 7, 9, 10, 11, 13, 14, 15 & 16)	
100		Ref	REPAIR TOOLS (NOT SHOWN)	
100	70003126	1	Press, Wiper	
100	70003127	1	Press, Bushing (Use with Rod Bearing)	
100	70003128	1	Tool, Bushing Removal (Use with Rod Bearing)	
100	70003129	1	Tool, Head Seal Protection	
100	70003130	1	Tool, Piston Seal Protection	
100	70003093	1	Press, Bushing (Use with Pin Mounting Bushings)	
100	70003094	1	Tool, Bushing Removal (Use with Pin Mounting Bushings)	
	1001199460	Ref	JIB LIFT CYLINDER ASSEMBLY	A
202	1001199306	1	Cartridge, Counter Balance Valve	
202	2900770	1	Seal Kit - 1001199306 Valve	

SECTION 6 - CYLINDER

FIGURE 6-4. LIFT (MAIN BOOM) CYLINDER ASSEMBLY

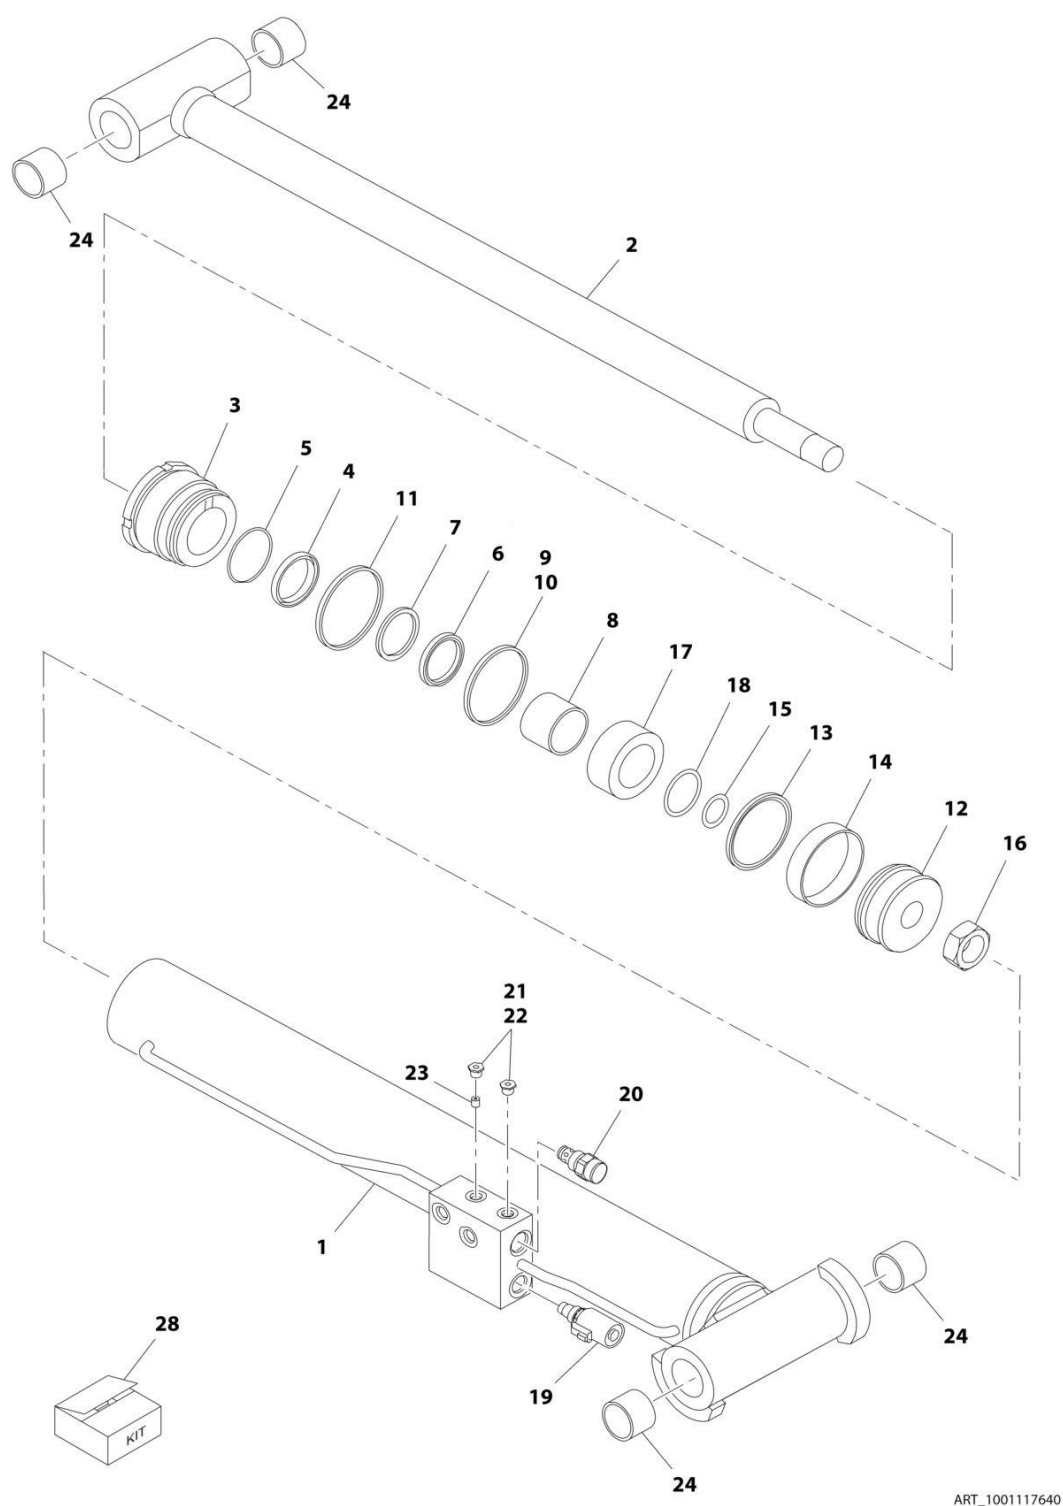

ART_1001117640


SECTION 6 - CYLINDER

FIGURE 6-4. LIFT (MAIN BOOM) CYLINDER ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001117640	Ref	MAIN BOOM LIFT CYLINDER ASSEMBLY	H
1	70003103	1	Barrel	
2	70003104	1	Rod	
3	70003105	1	Head	
4	See Note	NSS	Wiper (Note: Use Item 28)	
5	70002412	1	Ring, Retaining	
6	See Note	NSS	Seal, Rod (Note: Use Item 28)	
7	See Note	NSS	Ring, Back-up (Note: Use Item 28)	
8	70022565	1	Bearing	
9	See Note	NSS	O-Ring (Note: Use Item 28)	
10	See Note	NSS	Ring, Back-up (Note: Use Item 28)	
11	See Note	NSS	O-Ring (Note: Use Item 28)	
12	70003106	1	Piston	
13	See Note	NSS	Seal, Piston (Note: Use Item 28)	
14	See Note	NSS	Ring, Wear (Note: Use Item 28)	
15	See Note	NSS	O-Ring (Note: Use Item 28)	
16	70002335	1	Nut	
17	70002344	1	Spacer	
18	See Note	NSS	O-Ring (Note: Use Item 28)	
19	7024884	1	Cartridge, Solenoid Valve	
19	7012967	1	Seal Kit - 7024884 Valve	
19	70002386	1	Coil	
20	70003076	1	Cartridge, Check Valve	
20	7017496	1	Seal Kit - 70003076 Valve	
21	70023370	7	Plug	
22	See Note	7	O-Ring (Note: Not Available - Purchase Locally)	
23	70002334	1	Orifice	
24	0961948	2	Bushing, Garmax (was p/n 70003107)	
28	70003108	1	Seal Kit (Includes Items 4, 6, 7, 9, 10, 11, 13, 14, 15 & 18)	
100		Ref	REPAIR TOOLS (NOT SHOWN)	
100	70003109	1	Press, Wiper	
100	70003110	1	Press, Bushing (Use with Rod Bearing)	
100	70003111	1	Tool, Bushing Removal (Use with Rod Bearing)	
100	70003112	1	Tool, Head Seal Protection	
100	70003113	1	Tool, Piston Seal Protection	
100	70003082	1	Press, Bushing (Use with Pin Mounting Bushings)	
100	70003083	1	Tool, Bushing Removal (Use with Pin Mounting Bushings)	

SECTION 6 - CYLINDER

FIGURE 6-5. LIFT (TOWER BOOM) CYLINDER ASSEMBLY

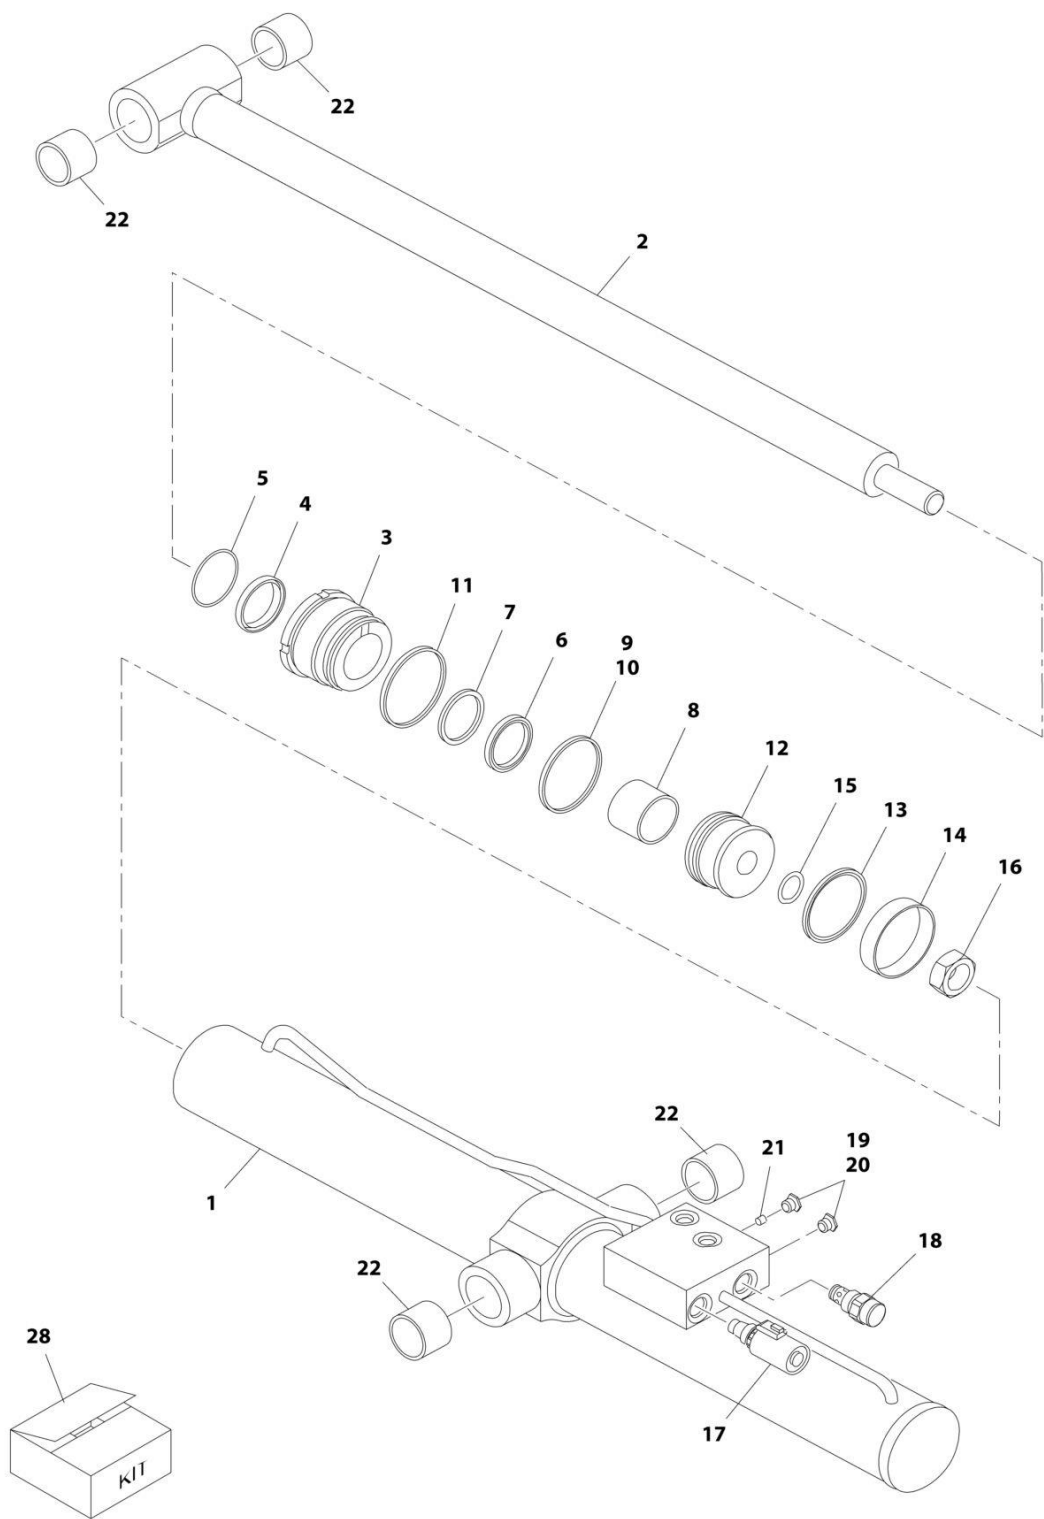

ART_1001122527


SECTION 6 - CYLINDER

FIGURE 6-5. LIFT (TOWER BOOM) CYLINDER ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001122527	Ref	LIFT (TOWER BOOM) CYLINDER ASSEMBLY	D
1	70003071	1	Barrel	
2	70003072	1	Rod	
3	70003073	1	Head	
4	See Note	NSS	Wiper (Note: Use Item 28)	
5	70002410	1	Ring, Retaining	
6	See Note	NSS	Seal, Rod (Note: Use Item 28)	
7	See Note	NSS	Ring, Back-up (Note: Use Item 28)	
8	70002337	1	Bearing	
9	See Note	NSS	O-Ring (Note: Use Item 28)	
10	See Note	NSS	Ring, Back-up (Note: Use Item 28)	
11	See Note	NSS	O-Ring (Note: Use Item 28)	
12	70003074	1	Piston	
13	See Note	NSS	Seal, Piston (Note: Use Item 28)	
14	See Note	NSS	Ring, Wear (Note: Use Item 28)	
15	See Note	NSS	O-Ring (Note: Use Item 28)	
16	70002335	1	Nut	
17	7024884	1	Cartridge, Solenoid Valve	
17	7012967	1	Seal Kit - 7024884 Valve	
17	70002386	1	Coil	
18	70003076	1	Cartridge, Check Valve	
18	7017496	1	Seal Kit - 70003076 Valve	
19	70023370	2	Plug	
20	See Note	2	O-Ring (Note: Not Available - Purchase Locally)	
21	70002334	1	Orifice	
22	0961948	4	Bushing, Garmax (was p/n 70003107)	
28	70003075	1	Seal Kit (Includes Items 4, 6, 7, 9, 10, 11, 13, 14 & 15)	
100		Ref	REPAIR TOOLS (NOT SHOWN)	
100	70003077	1	Press, Wiper	
100	70003078	1	Press, Bushing (Use with Rod Bearing)	
100	70003079	1	Tool, Bushing Removal (Use with Rod Bearing)	
100	70003080	1	Tool, Head Seal Protection	
100	70003081	1	Tool, Piston Seal Protection	
100	70003082	1	Press, Bushing (Use with Pin Mounting Bushings)	
100	70003083	1	Tool, Bushing Removal (Use with Pin Mounting Bushings)	

SECTION 6 - CYLINDER

FIGURE 6-6. MASTER CYLINDER ASSEMBLY

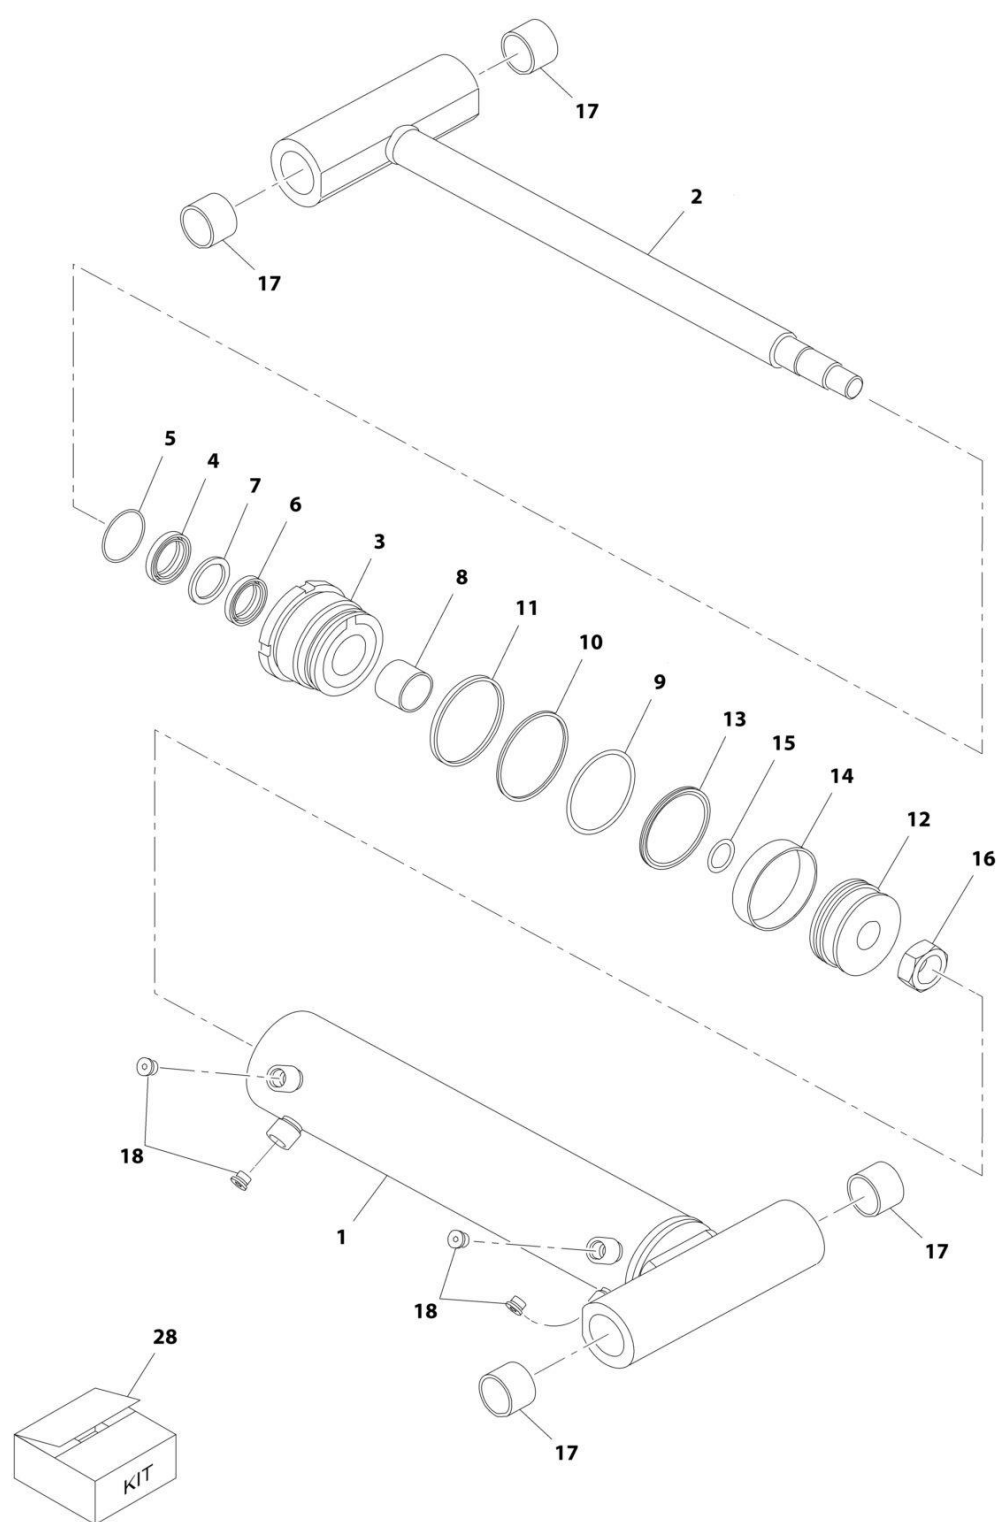

ART_1001120976


SECTION 6 - CYLINDER

FIGURE 6-6. MASTER CYLINDER ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001120976	Ref	MASTER CYLINDER ASSEMBLY	B
1	70003084	1	Barrel	
2	70002354	1	Rod	
3	70003085	1	Head	
4	See Note	NSS	Wiper (Note: Use Item 28)	
5	70002366	1	Ring, Retaining	
6	See Note	NSS	Seal, Rod (Note: Use Item 28)	
7	See Note	NSS	Ring, Back-up (Note: Use Item 28)	
8	70002352	1	Bearing	
9	See Note	NSS	O-Ring (Note: Use Item 28)	
10	See Note	NSS	Ring, Back-up (Note: Use Item 28)	
11	See Note	NSS	O-Ring (Note: Use Item 28)	
12	70003086	1	Piston	
13	See Note	NSS	Seal, Piston (Note: Use Item 28)	
14	See Note	NSS	Ring, Wear (Note: Use Item 28)	
15	See Note	NSS	O-Ring (Note: Use Item 28)	
16	70002335	1	Nut	
17	0961951	4	Bushing, Garmax (was p/n 70003087)	
18	70023371	4	Plug	
28	70003088	1	Seal Kit (Includes Items 4, 6, 7, 9, 10, 11, 13, 14 & 15)	
100		Ref	REPAIR TOOLS (NOT SHOWN)	
100	70003089	1	Press, Wiper	
100	70003090	1	Press, Bushing (Use with Rod Bearing)	
100	70003091	1	Tool, Bushing Removal (Use with Rod Bearing)	
100	70003092	1	Tool, Head Seal Protection	
100	70003081	1	Tool, Piston Seal Protection	
100	70003093	1	Press, Bushing (Use with Pin Mounting Bushings)	
100	70003094	1	Tool, Bushing Removal (Use with Pin Mounting Bushings)	

SECTION 6 - CYLINDER

FIGURE 6-7. STEER CYLINDER ASSEMBLY

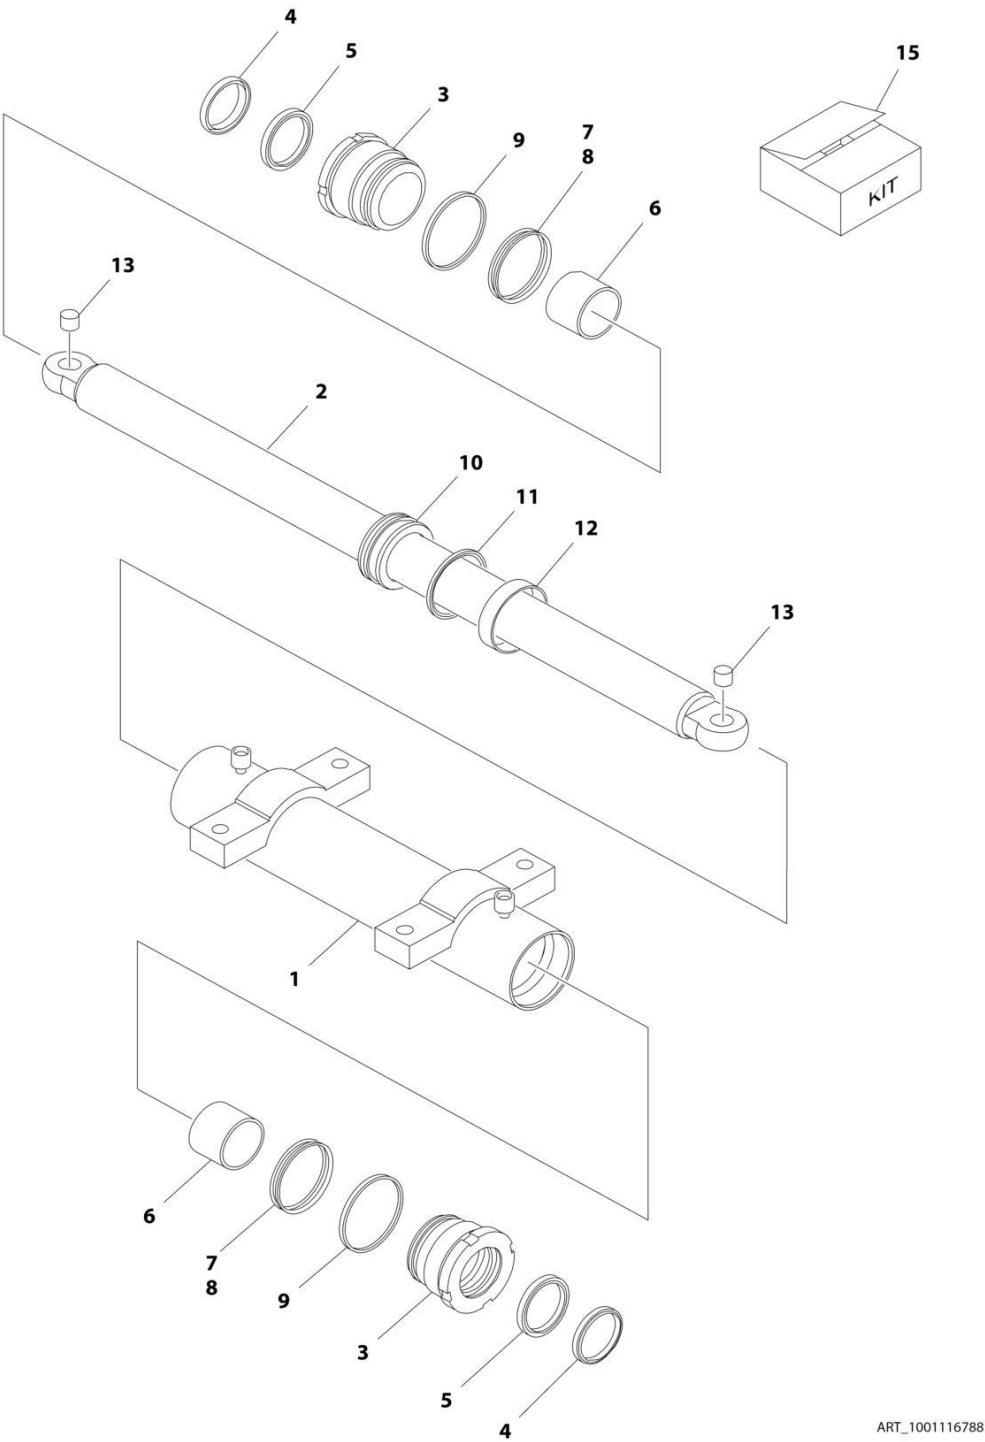

ART_1001116788


SECTION 6 - CYLINDER

FIGURE 6-7. STEER CYLINDER ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001116788	Ref	STEER CYLINDER ASSEMBLY	C
1	70003095	1	Barrel	
2	70003096	1	Rod	
3	70003098	2	Head	
4	See Note	NSS	Wiper (Note: Use Item 15)	
5	See Note	NSS	Seal, Rod (Note: Use Item 15)	
6	70002337	2	Bearing	
7	See Note	NSS	O-Ring (Note: Use Item 15)	
8	See Note	NSS	Ring, Back-up (Note: Use Item 15)	
9	See Note	NSS	O-Ring (Note: Use Item 15)	
10	70003097	1	Piston	
11	See Note	NSS	Seal, Piston (Note: Use Item 15)	
12	See Note	NSS	Ring, Wear (Note: Use Item 15)	
13	70002380	4	Bushing, Garmax	
15	70003099	1	Seal Kit (Includes Items 4, 5, 7, 8, 9, 11 & 12)	
100		Ref	REPAIR TOOLS (NOT SHOWN)	
100	70003077	1	Press, Wiper	
100	70003078	1	Press, Bushing (Use with Rod Bearing)	
100	70003079	1	Tool, Bushing Removal (Use with Rod Bearing)	
100	70003080	1	Tool, Head Seal Protection	
100	70003100	1	Tool, Piston Seal Protection	
100	70003101	1	Press, Bushing (Use with Pin Mounting Bushings)	
100	70003102	1	Tool, Bushing Removal (Use with Pin Mounting Bushings)	

SECTION 6 - CYLINDER

FIGURE 6-8. TELESCOPE CYLINDER ASSEMBLY

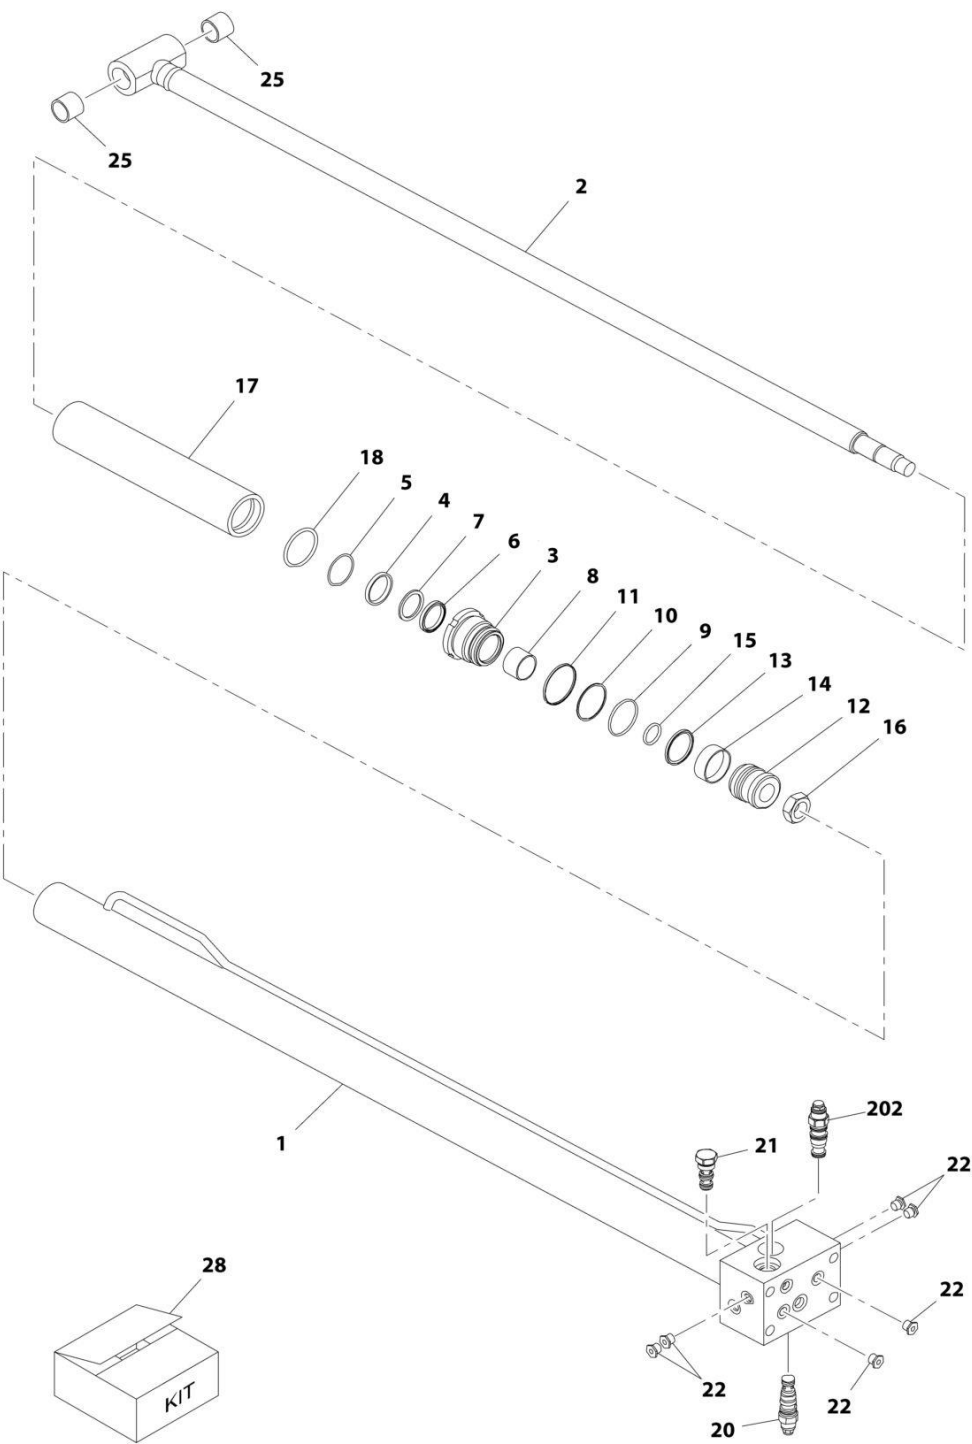

ART_1001120974

SECTION 6 - CYLINDER


FIGURE 6-8. TELESCOPE CYLINDER ASSEMBLY

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001120974	Ref	TELESCOPE CYLINDER ASSEMBLY	C
1	70003114	1	Barrel	
2	70003115	1	Rod	
3	70003116	1	Head	
4	See Note	NSS	Wiper (Note: Use Item 28)	
5	70002366	1	Ring, Retaining	
6	See Note	NSS	Seal, Rod (Note: Use Item 28)	
7	See Note	NSS	Ring, Back-up (Note: Use Item 28)	
8	70002352	1	Bearing	
9	See Note	NSS	O-Ring (Note: Use Item 28)	
10	See Note	NSS	Ring, Back-up (Note: Use Item 28)	
11	See Note	NSS	O-Ring (Note: Use Item 28)	
12	70003117	1	Piston	
13	See Note	NSS	Seal, Piston (Note: Use Item 28)	
14	See Note	NSS	Ring, Wear (Note: Use Item 28)	
15	See Note	NSS	O-Ring (Note: Use Item 28)	
16	70002335	1	Nut	
17	70002364	1	Spacer	
18	See Note	NSS	O-Ring (Note: Use Item 28)	
20	70002389	1	Cartridge, Counterbalance Valve	
20	2900770	1	Seal Kit - 70002389 Valve	
21	10837580	1	Cartridge, Load Shuttle Valve	
21	7010543	1	Seal Kit - 10837580 Valve	
22	70023370	6	Plug	
25	70003118	2	Bushing	
28	70003119	1	Seal Kit (Includes Items 4, 6, 7, 9, 10, 11, 13, 14, 15 & 18)	
100		Ref	REPAIR TOOLS (NOT SHOWN)	
100	70003089	1	Press, Wiper	
100	70003090	1	Press, Bushing (Use with Rod Bearing)	
100	70003091	1	Tool, Bushing Removal (Use with Rod Bearing)	
100	70003092	1	Tool, Head Seal Protection	
100	70003120	1	Press, Bushing (Use with Pin Mounting Bushings)	
100	70003121	1	Tool, Bushing Removal (Use with Pin Mounting Bushings)	
	1001199461	Ref	TELESCOPE CYLINDER ASSEMBLY	A
202	1001199306	1	Cartridge, Counter Balance Valve	
202	2900770	1	Seal Kit - 1001199306 Valve	

SECTION 7 - HYDRAULIC


SECTION 7 - HYDRAULIC

FIGURE 7-1. HYDRAULIC SYSTEM INSTALLATION - WITHOUT ARCTIC PACKAGE

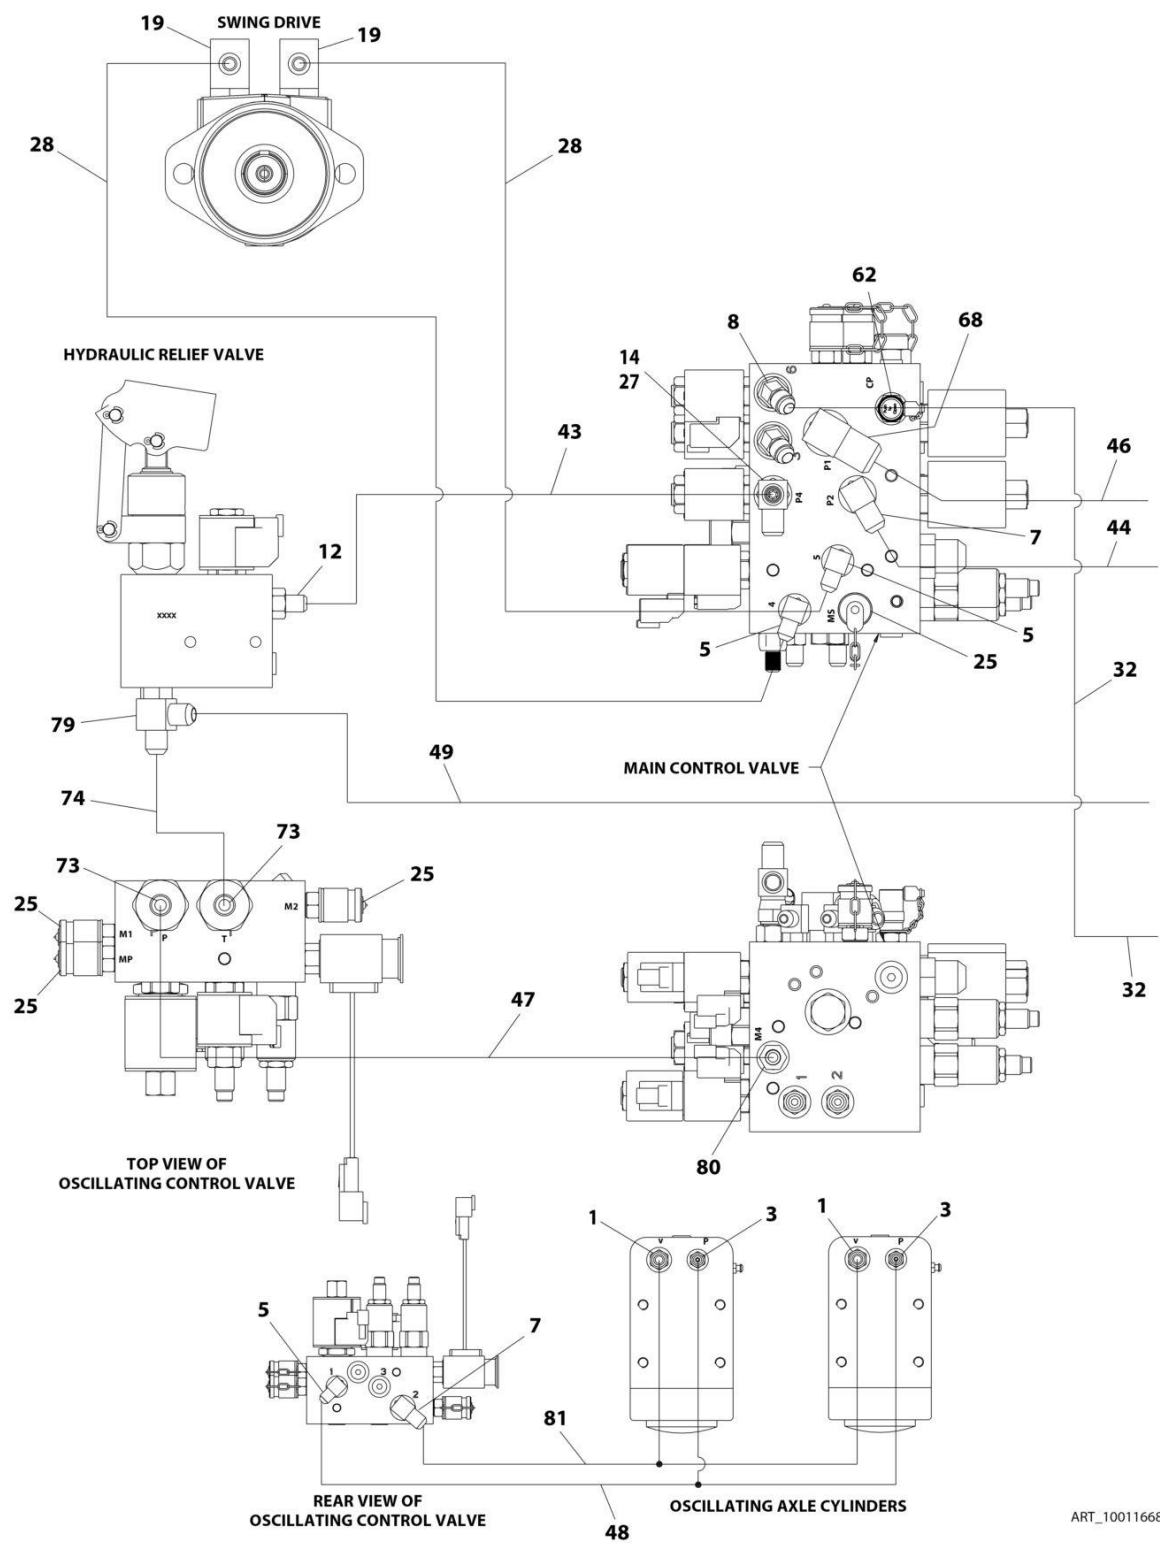


ART_1001166848_1OF4

SECTION 7 - HYDRAULIC

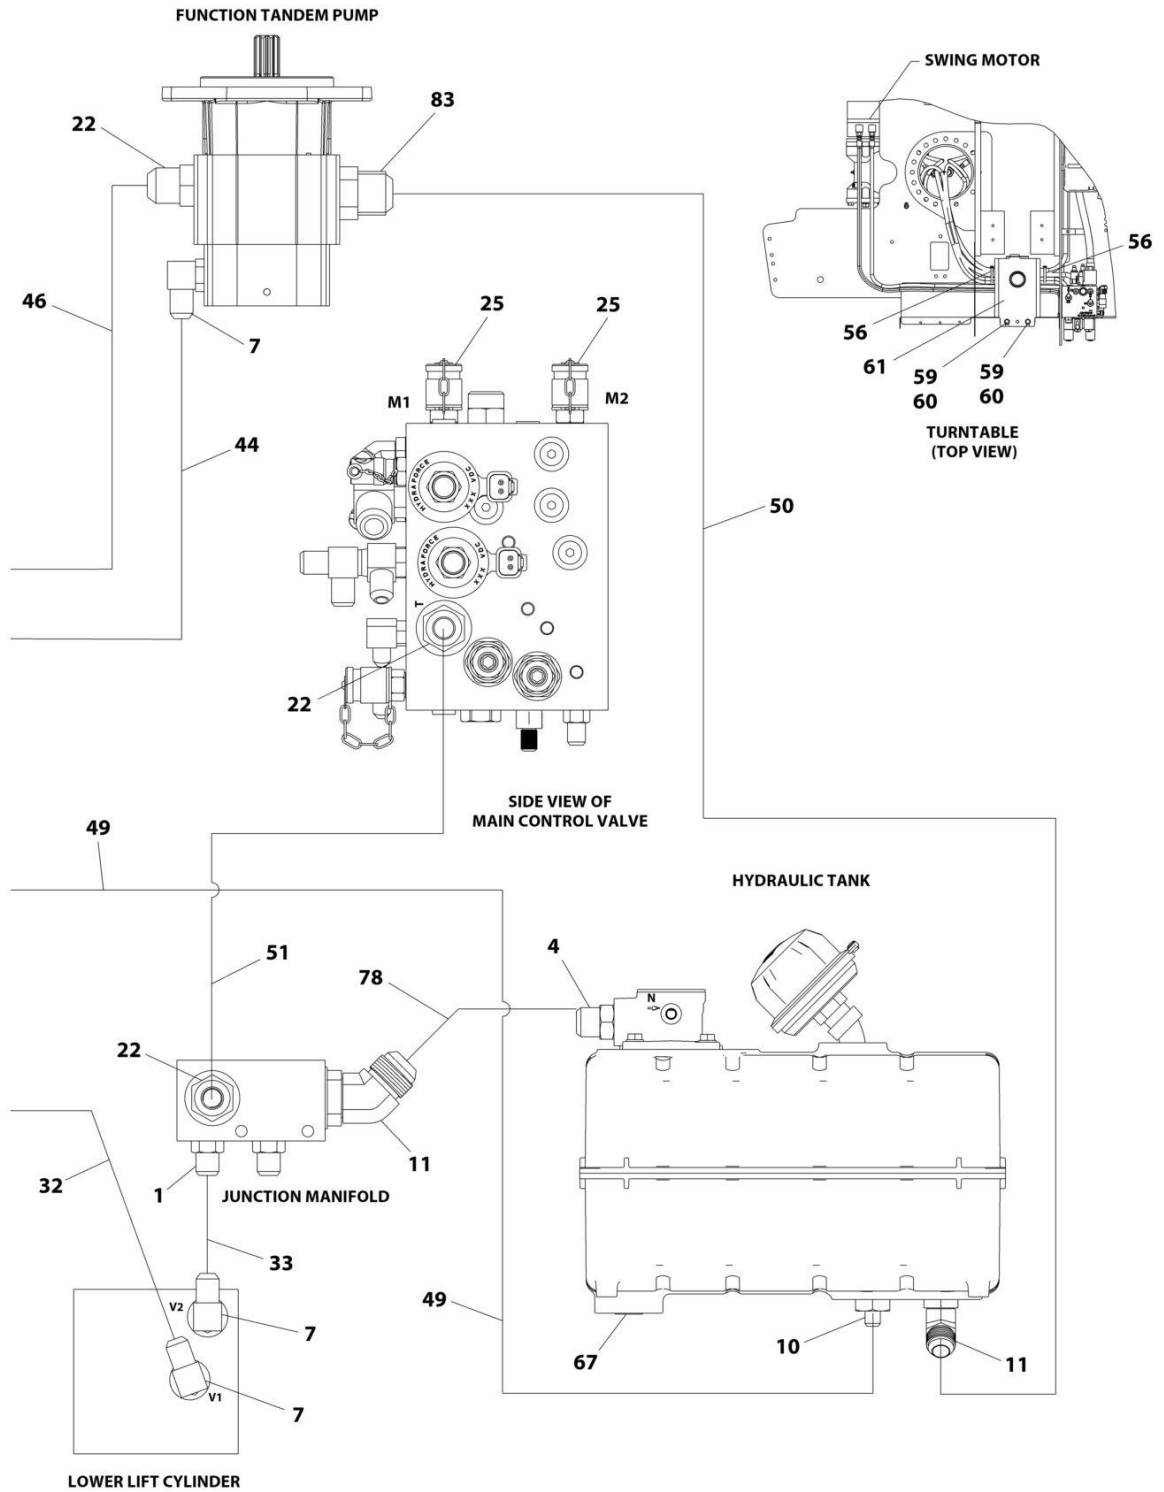


ART_1001166848_2OF4

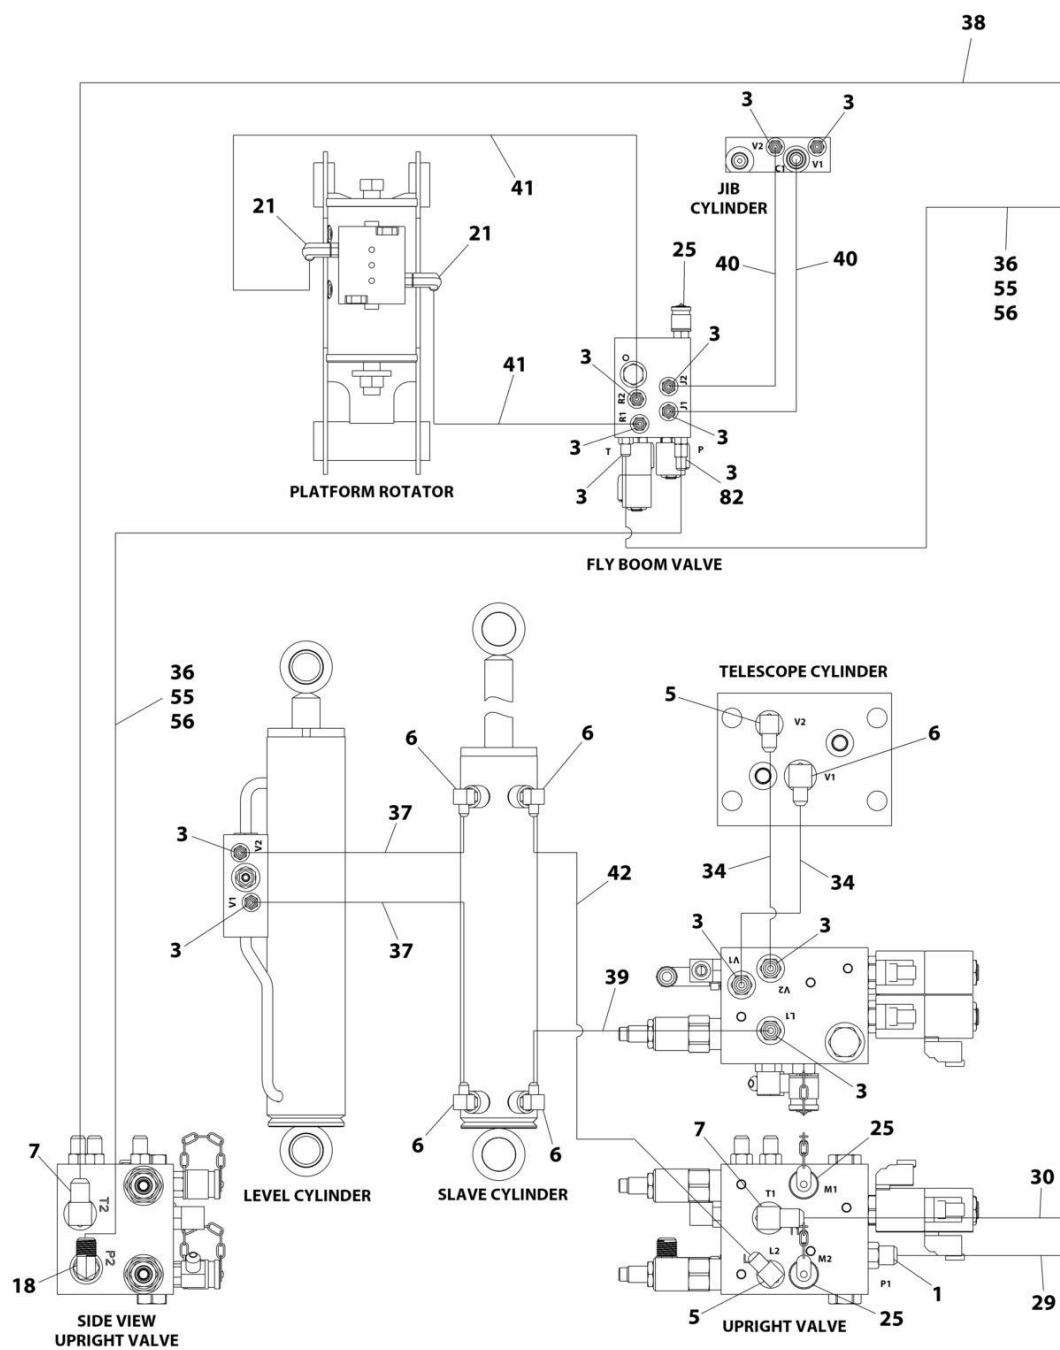

ART_1001166848_3OF4

SECTION 7 - HYDRAULIC

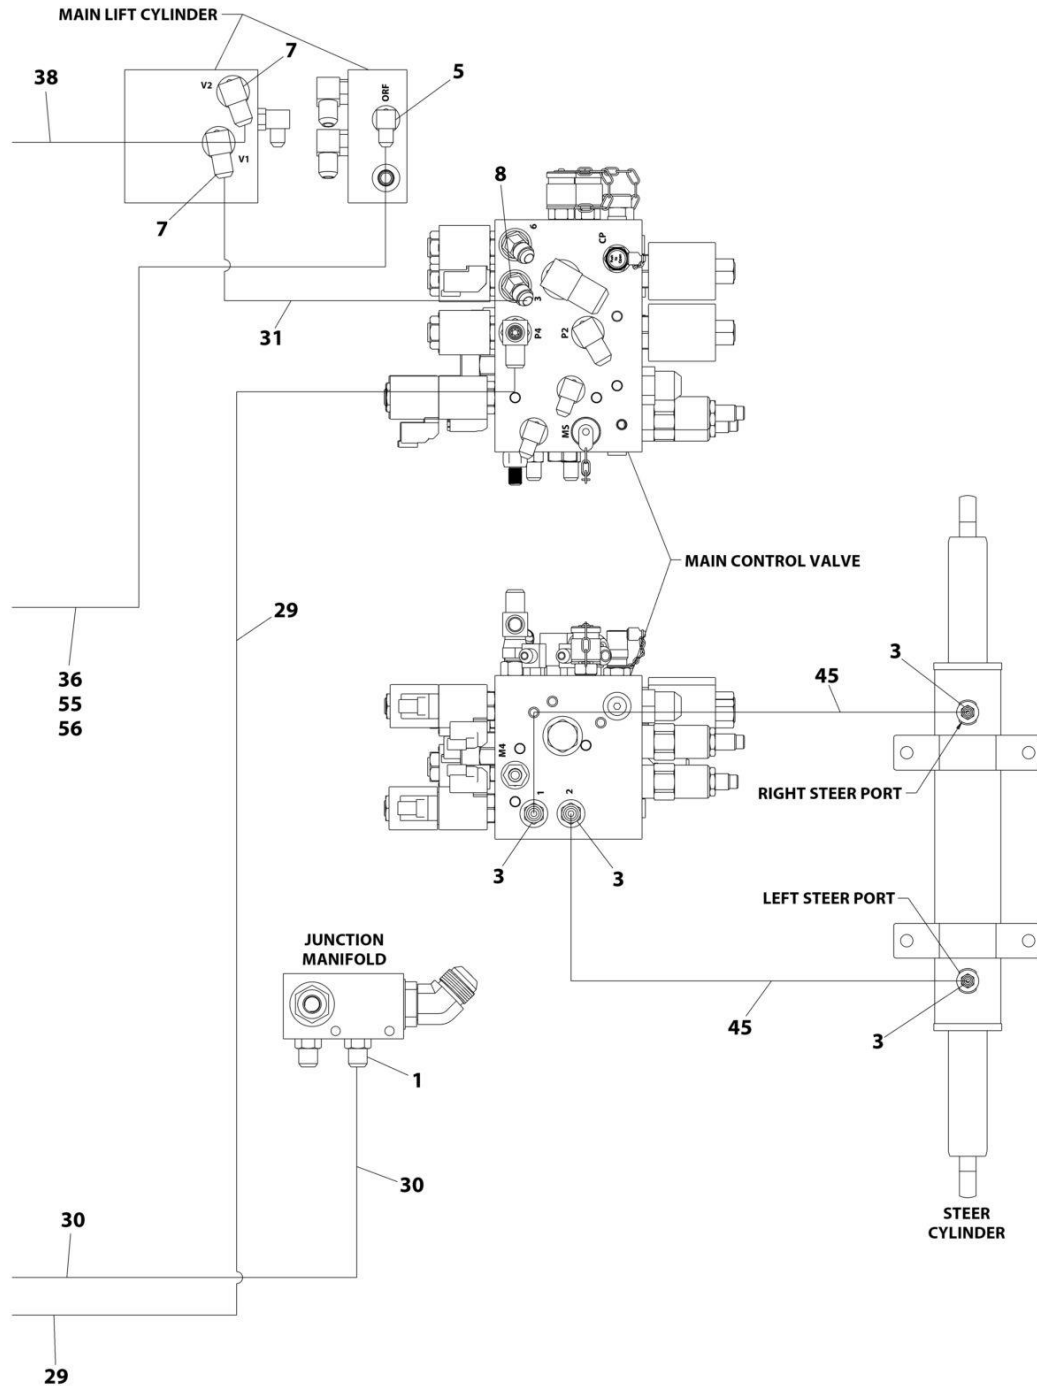

ART_1001166848_4OF4

SECTION 7 - HYDRAULIC

FIGURE 7-1. HYDRAULIC SYSTEM INSTALLATION - WITHOUT ARCTIC PACKAGE

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001166848	Ref	HYDRAULIC SYSTEM INSTALLATION - WITHOUT ARCTIC PACKAGE	M
1	2220371	5	Fitting, Straight JIC/ORB	
3	2220415	19	Fitting, Straight JIC/ORB	
4	2220451	1	Fitting, Straight JIC/ORB	
5	2220466	6	Fitting, 90 JIC/ORB	
6	2220472	5	Fitting, 90 JIC/ORB	
7	2220473	9	Fitting, 90 JIC/ORB	
8	2220501	2	Fitting, 45 JIC/ORB	
10	2220577	1	Fitting, Straight JIC/ORB	
11	2220498	2	Fitting, 45 JIC/ORB	
12	2220582	1	Fitting, Straight JIC/ORB	
14	2220635	1	Fitting, Tee JIC/FSJIC/JIC	
18	2220819	1	Fitting, 90 JIC/ORB	
19	2220828	2	Fitting, 90 JIC/ORB	
21	2220940	2	Fitting, 90 JIC/ORB	
22	2220947	3	Fitting, Straight JIC/ORB	
25	2221086	9	Fitting, Test Port	
27	80233041	1	Fitting, Check	
28	1001119525	2	Hose	
29	1001119572	1	Hose	
30	1001119577	1	Hose	
31	1001119593	1	Hose	
32	1001119594	1	Hose	
33	1001119595	1	Hose	
34	1001119596	2	Hose	
35	1001119597	1	Hose	
36	1001119598	1	Hose	
37	1001119600	2	Hose	
38	1001119602	1	Hose	
39	1001119603	1	Hose	
40	1001119604	2	Hose	
41	1001119605	2	Hose	
42	1001121966	1	Hose	
43	1001127705	1	Hose	
44	1001167206	1	Hose	
45	1001167207	2	Hose	
46	1001167208	1	Hose	
47	1001167210	1	Hose	
48	1001168702	1	Hose	
49	1001172556	1	Hose	
50	1001172557	1	Hose	
51	1001172558	1	Hose	
55	4100066	1	Sleeve, Hose Wrap	
56	4240018	AR	Tie-Strap	
59	5250810	2	Bolt M8 X 20	
60	8310686	2	Retainer M8	
61	1001121221	1	Cover, Tray	
62	1001119455	1	Valve, Oil Sampling	
67	2220887	1	Plug ORB	


SECTION 7 - HYDRAULIC

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
68	2221042	1	Fitting, 90 JIC/ORB	
73	1001152155	2	Fitting, Straight JIC/ORB	
74	1001178795	1	Hose	
78	1001183675	1	Hose	
79	2220606	1	Fitting, Tee JIC/ORB/JIC	
80	1001189611	1	Valve, Check	
81	1001197509	1	Hose	
82	2220914	1	Orifice	
83	2220408	1	Fitting, Straight JIC/ORB	

SECTION 8 - ELECTRICAL

SECTION 8 - ELECTRICAL

FIGURE 8-1. AC BOX AT PLATFORM INSTALLATION - LOCALLY SUPPLIED COMPONENTS (ANSI EXPORT, AUSTRALIAN AND CHINA SPECS)

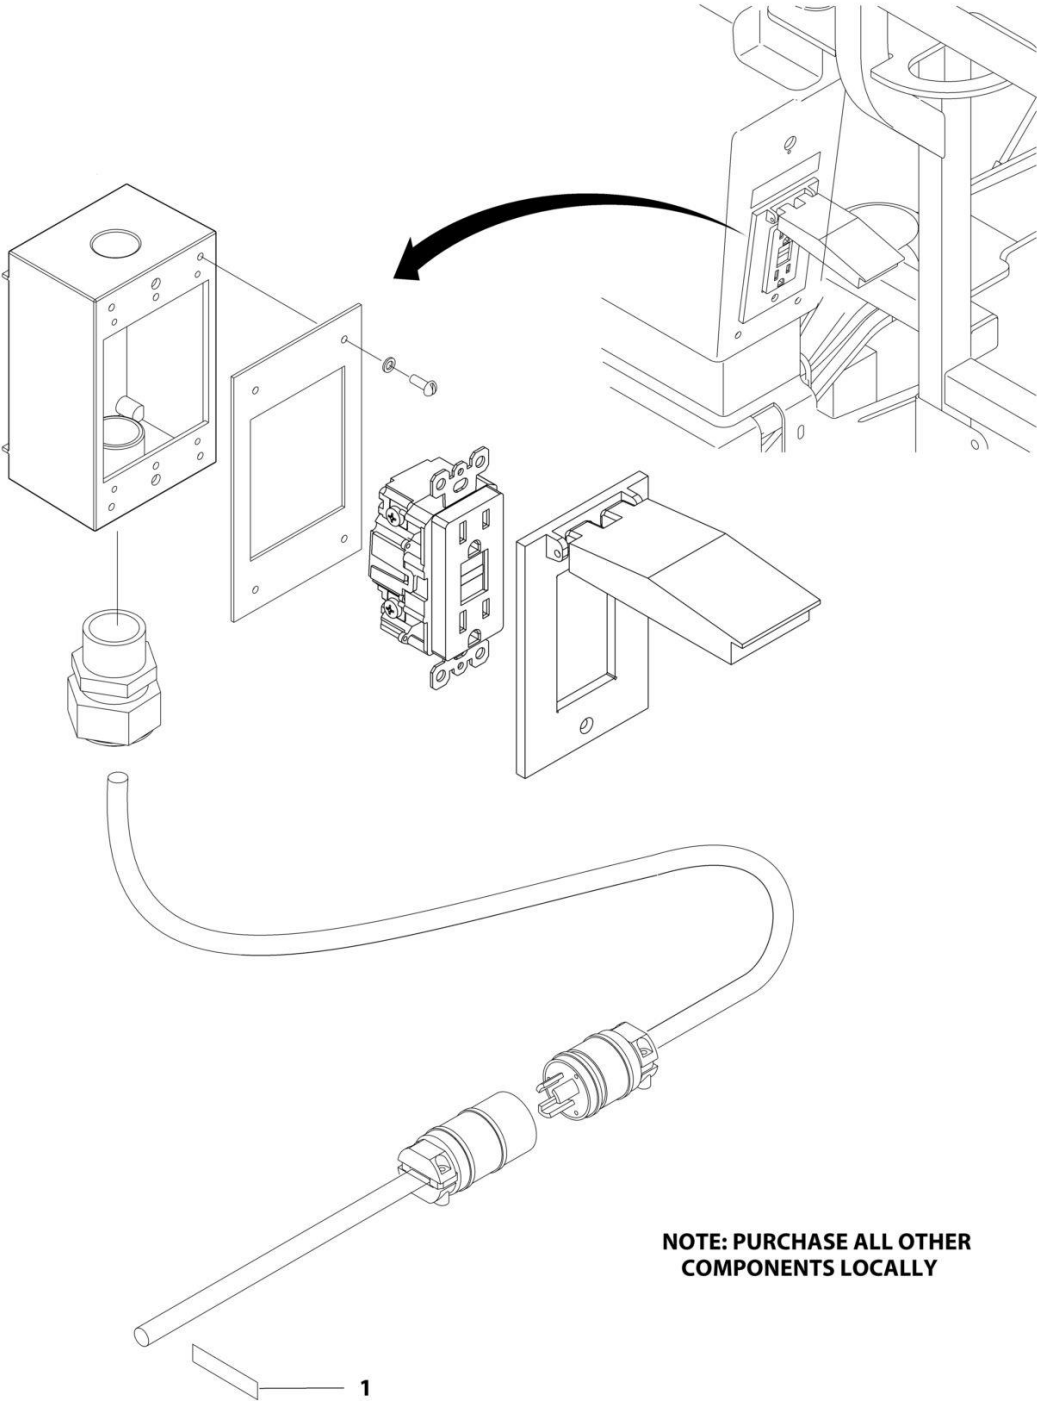

ART_1001119870


SECTION 8 - ELECTRICAL

FIGURE 8-1. AC BOX AT PLATFORM INSTALLATION - LOCALLY SUPPLIED COMPONENTS (ANSI EXPORT, AUSTRALIAN AND CHINA SPECS)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119870	Ref	AC BOX AT PLATFORM INSTALLATION - LOCALLY SUPPLIED COMPONENTS	A
1	3251243	1	Decal - 120V-60Hz	

SECTION 8 - ELECTRICAL

FIGURE 8-2. AC BOX AT PLATFORM INSTALLATION - LOCALLY SUPPLIED (CE SPEC)

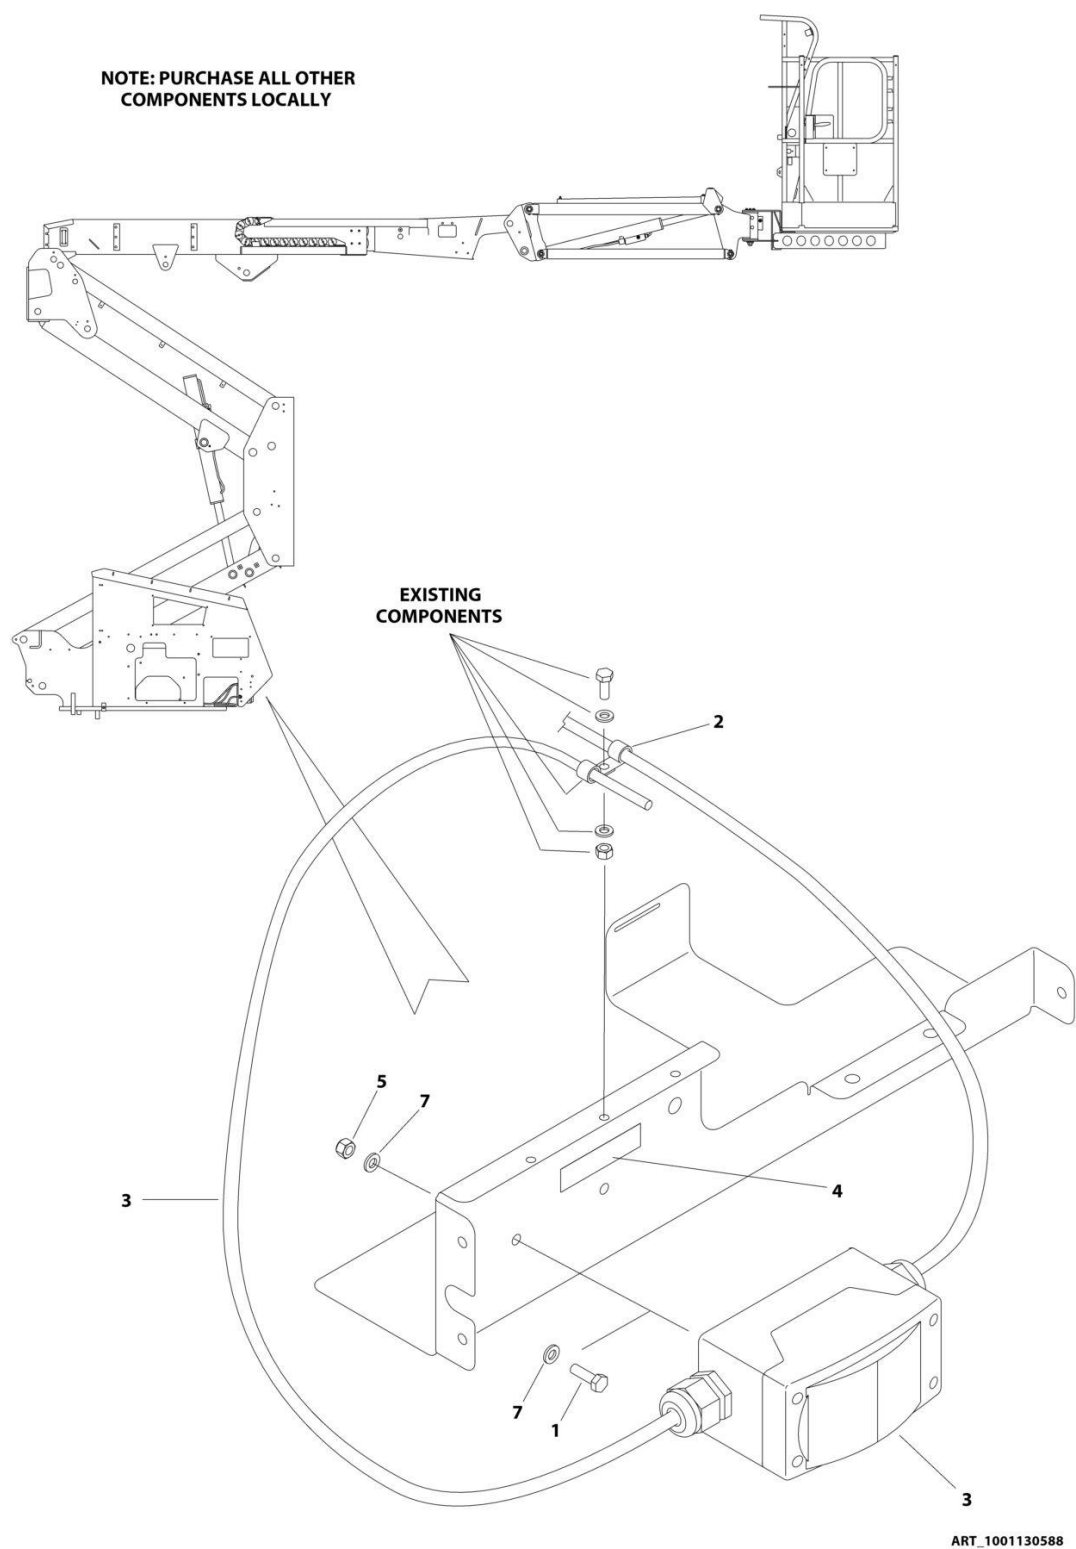


SECTION 8 - ELECTRICAL

FIGURE 8-2. AC BOX AT PLATFORM INSTALLATION - LOCALLY SUPPLIED (CE SPEC)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001130588	Ref	AC BOX AT PLATFORM INSTALLATION - LOCALLY SUPPLIED COMPONENTS	A
1	0760610	2	Bolt M6 x 20	
2	1320043	1	Clamp	
3	2902549	1	Breaker Box Kit (See Separate Breakdown in this Section)	
4	3252507	1	Decal - 220V - 50/60Hz	
5	3290605	2	Nut M6	
6	4460121	3	Cap, Wire (Not Shown - Located inside Receptacle Box)	
7	4811700	4	Washer M6	

SECTION 8 - ELECTRICAL

FIGURE 8-3. AC BOX AT PLATFORM INSTALLATION - 110V (ANSI, ANSI EXPORT, CSA, JAPANESE AND CHINA SPECS)

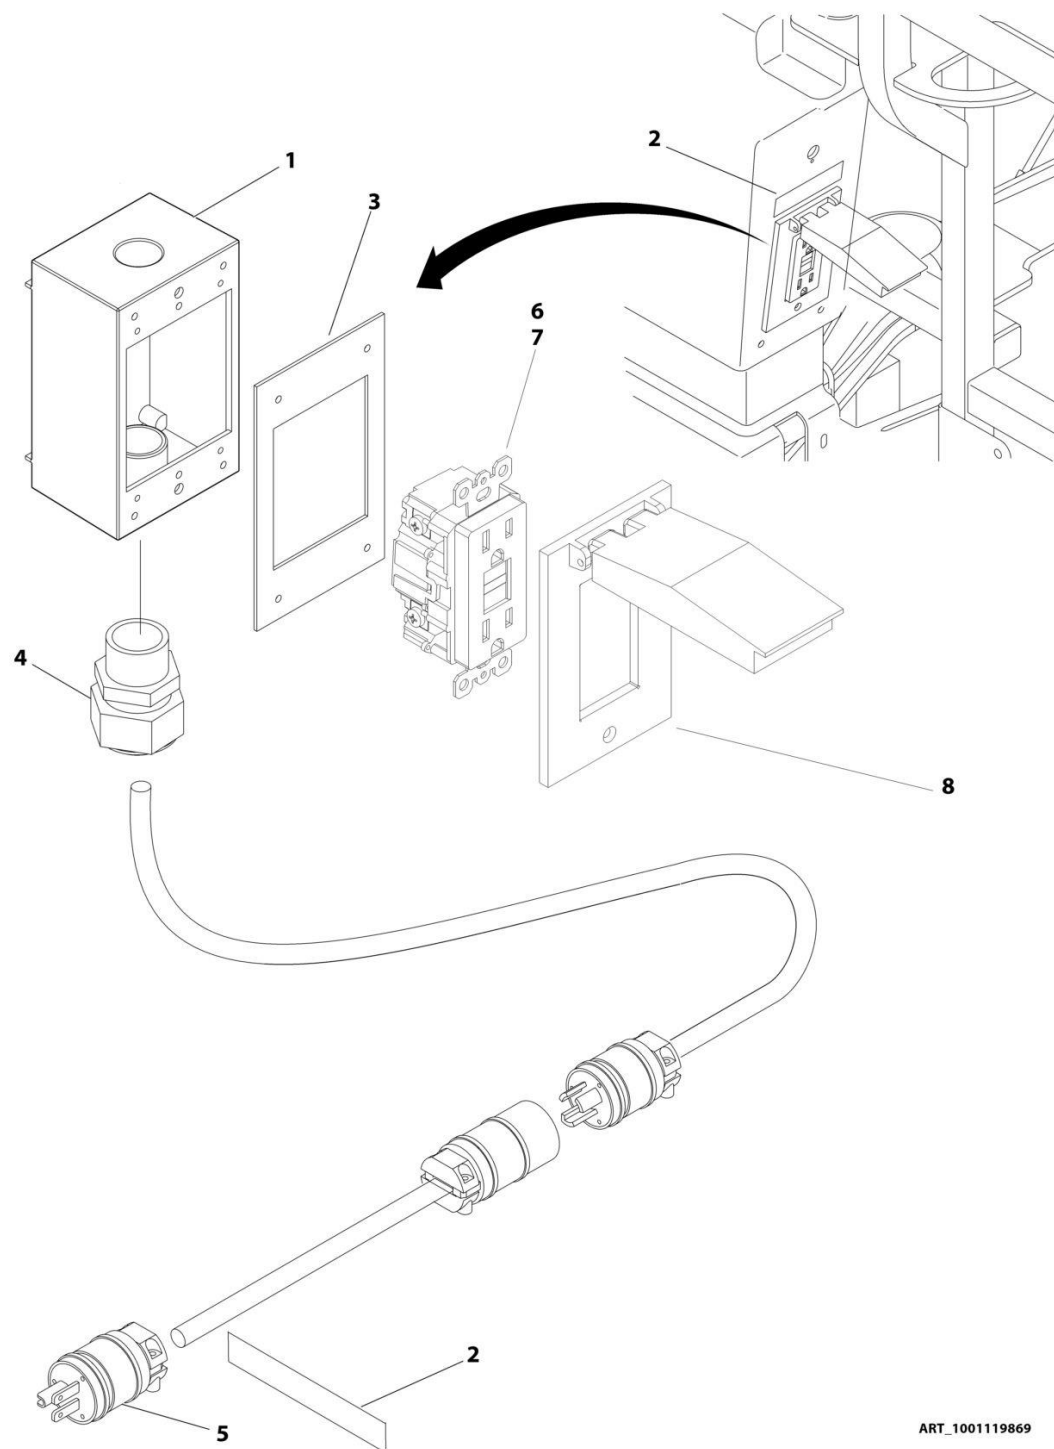

ART_1001119869


SECTION 8 - ELECTRICAL

FIGURE 8-3. AC BOX AT PLATFORM INSTALLATION - 110V (ANSI, ANSI EXPORT, CSA, JAPANESE AND CHINA SPECS)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119869	Ref	AC BOX AT PLATFORM INSTALLATION - 110V	A
1	0860038	1	Box, Switch	
2	3251243	2	Decal - 120V - 60Hz	
3	3960422	1	Gasket	
4	4460071	1	Connector, Strain Relief	
5	4460205	1	Plug, Male	
6	4460315	3	Terminal, Spade	
7	4460346	1	Receptacle	
8	1001110873	1	Shield, Cover	

SECTION 8 - ELECTRICAL

FIGURE 8-4. AC BOX AT PLATFORM INSTALLATION - 110V IEC YELLOW (CE SPEC)

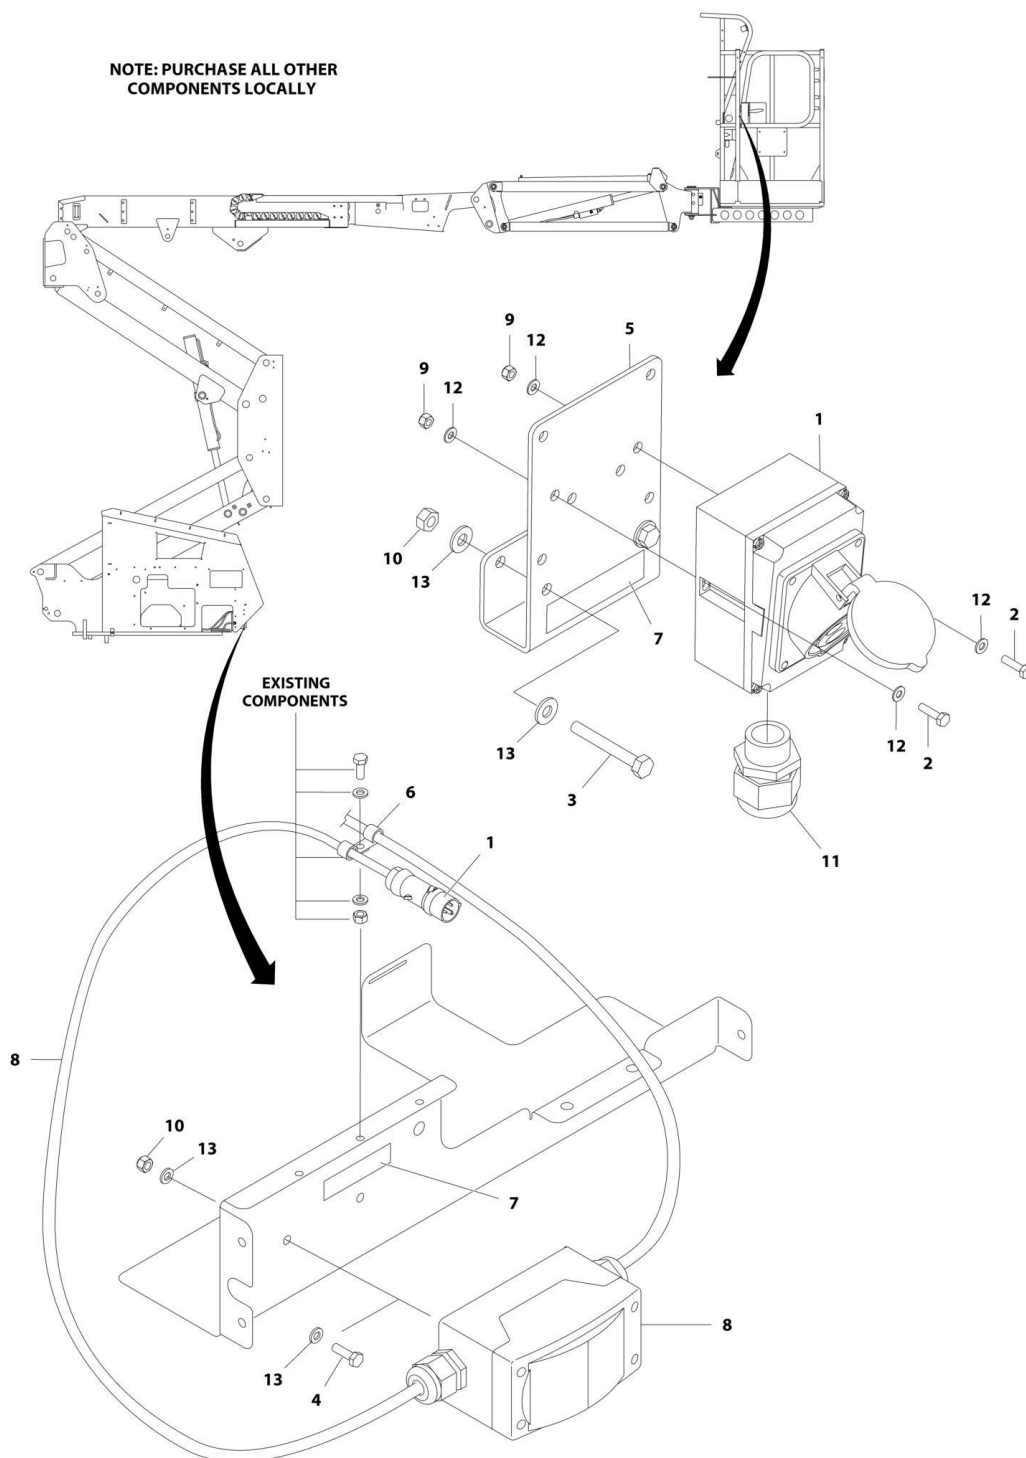

ART_1001119875


SECTION 8 - ELECTRICAL

FIGURE 8-4. AC BOX AT PLATFORM INSTALLATION - 110V IEC YELLOW (CE SPEC)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119875	Ref	AC BOX AT PLATFORM INSTALLATION - 110V IEC YELLOW	B
1	0275216	1	Receptacle Box Kit (See Separate Breakdown in this Section)	
2	0700408	2	Bolt M4 x 16	
3	0700618	2	Bolt M6 x 50	
4	0760610	2	Bolt M6 x 20	
5	1001193018	1	Bracket	
6	1320043	1	Clamp	
7	1705325	2	Decal - 120V - 50Hz	
8	2902549	1	Breaker Box Kit (See Separate Breakdown in this Section)	
9	3290405	2	Nut M4	
10	3290605	4	Nut M6	
11	4460968	1	Connector, Strain Relief	
12	4811400	4	Washer M4	
13	4811700	8	Washer M6	

SECTION 8 - ELECTRICAL

FIGURE 8-5. AC BOX AT PLATFORM INSTALLATION - 220V (CSA SPEC)

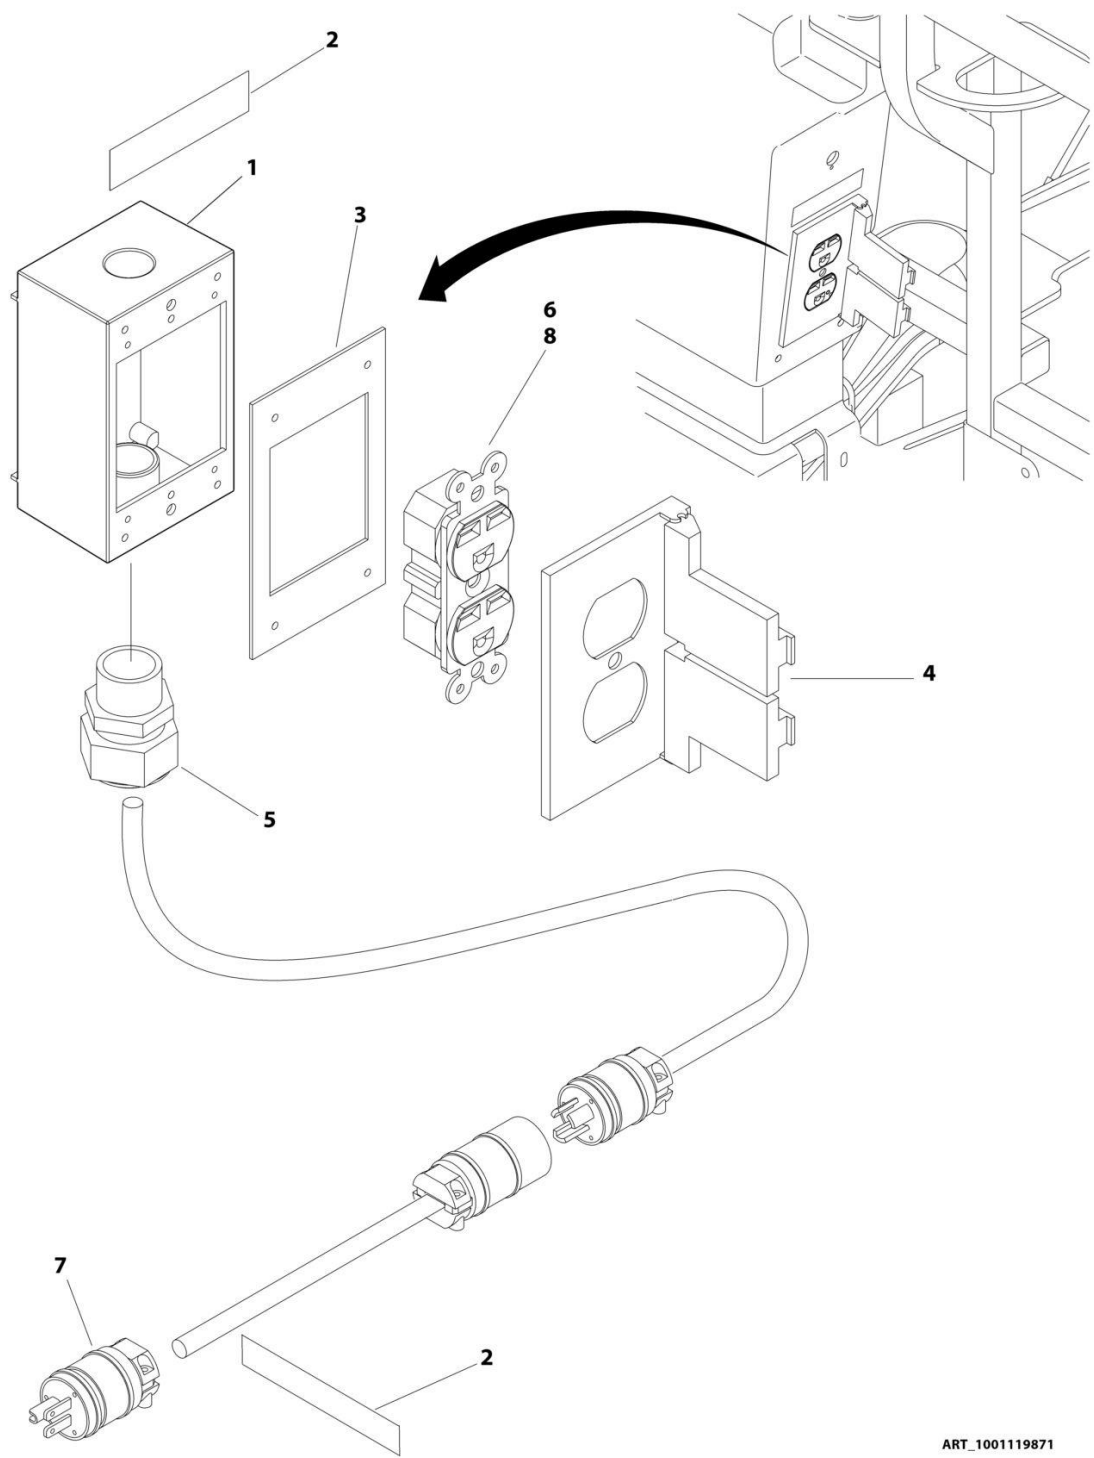

ART_1001119871


SECTION 8 - ELECTRICAL

FIGURE 8-5. AC BOX AT PLATFORM INSTALLATION - 220V (CSA SPEC)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119871	Ref	AC BOX AT PLATFORM INSTALLATION - 220V	A
1	0860038	1	Box, Switch	
2	3252507	2	Decal - 220V - 50/60Hz	
3	3960422	1	Gasket	
4	4060092	1	Shield, Weather	
5	4460071	1	Connector, Strain Relief	
6	4460125	1	Receptacle	
7	4460233	1	Plug, Male	
8	4460315	3	Terminal, Spade	

SECTION 8 - ELECTRICAL

FIGURE 8-6. AC BOX AT PLATFORM INSTALLATION - 220V IEC BLUE (CE SPEC)

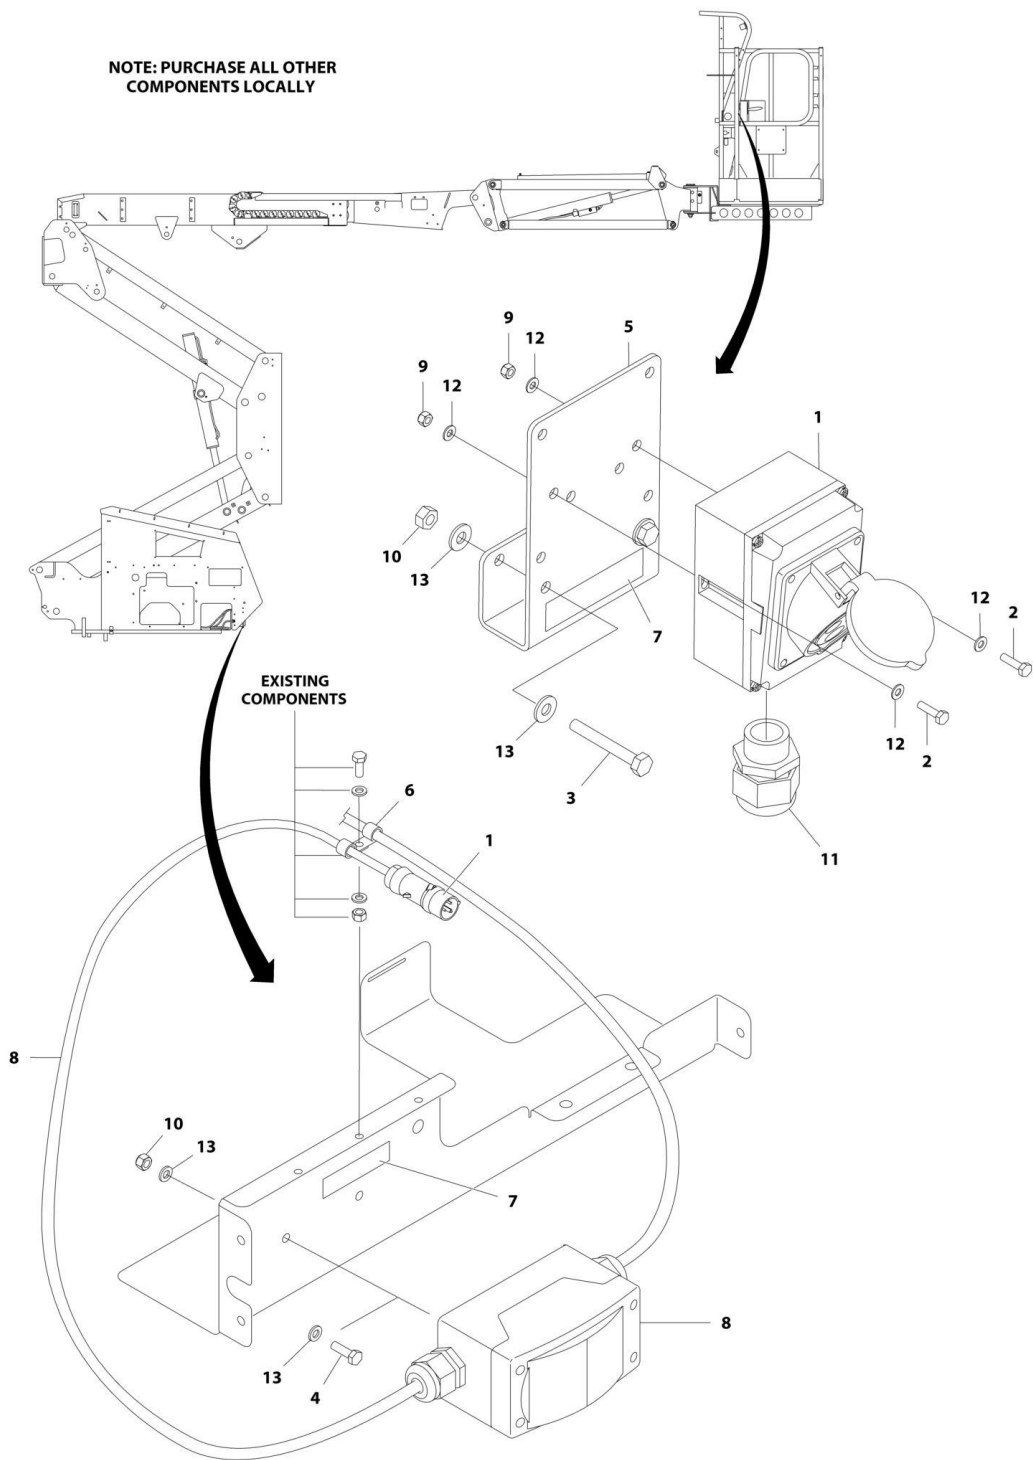

ART_1001119876


SECTION 8 - ELECTRICAL

FIGURE 8-6. AC BOX AT PLATFORM INSTALLATION - 220V IEC BLUE (CE SPEC)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119876	Ref	AC BOX AT PLATFORM INSTALLATION - 220V IEC BLUE	B
1	0275217	1	Receptacle Box Kit (See Separate Breakdown in this Section)	
2	0700408	2	Bolt M4 x 16	
3	0700618	2	Bolt M6 x 50	
4	0760610	2	Bolt M6 x 20	
5	1001193018	1	Bracket	
6	1320043	1	Clamp	
7	3252507	2	Decal - 220V - 50/60Hz	
8	2902549	1	Breaker Box Kit (See Separate Breakdown in this Section)	
9	3290405	2	Nut M4	
10	3290605	4	Nut M6	
11	4460968	1	Connector, Strain Relief	
12	4811400	4	Washer M4	
13	4811700	8	Washer M6	

SECTION 8 - ELECTRICAL

FIGURE 8-7. AC BOX AT PLATFORM INSTALLATION - 220V CEE7 POST GROUND WITH 70MM X 70MM BOX (CE SPEC)

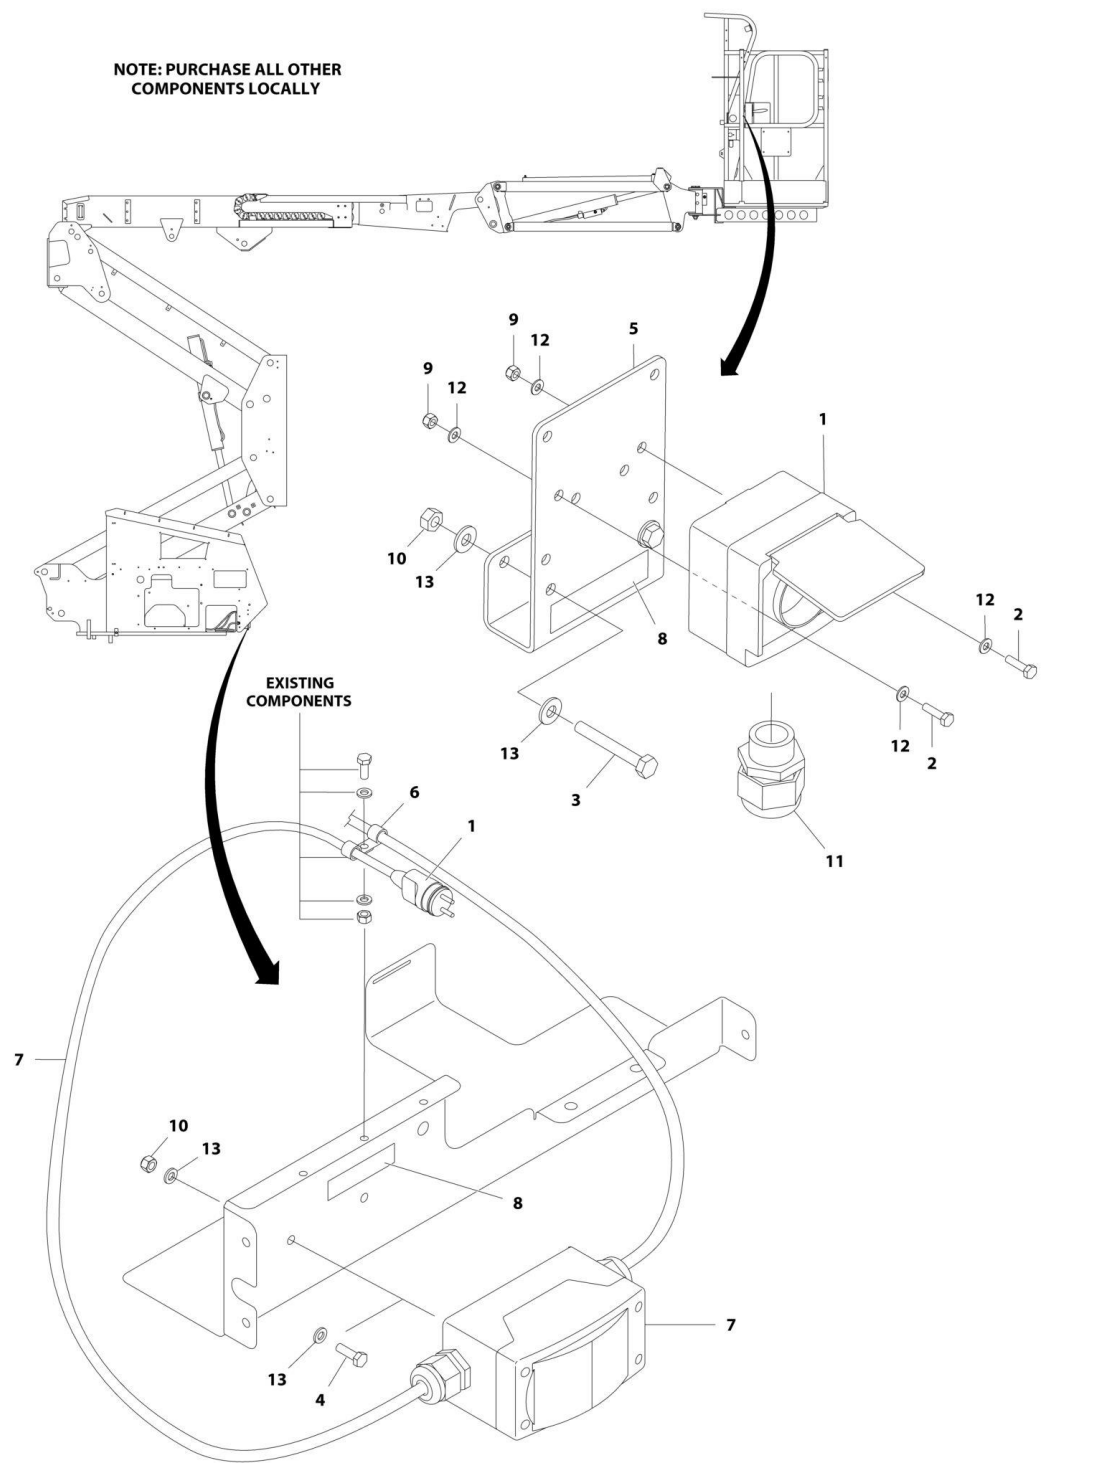

ART_1001115788


SECTION 8 - ELECTRICAL

FIGURE 8-7. AC BOX AT PLATFORM INSTALLATION - 220V CEE7 POST GROUND WITH 70MM X 70MM BOX (CE SPEC)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001115788	Ref	AC BOX AT PLATFORM INSTALLATION - 220V CEE7 POST GROUND WITH 70MM X 70MM BOX (CE SPEC)	B
1	0275218	1	Receptacle Box Kit (See Separate Breakdown in this Section)	
2	0700408	2	Bolt M4 x 16	
3	0700618	2	Bolt M6 x 50	
4	0760610	2	Bolt M6 x 20	
5	1001193018	1	Bracket	
6	1320043	1	Clamp	
7	2902549	1	Breaker Box Kit (See Separate Breakdown in this Section)	
8	3252507	2	Decal - 220V - 50/60Hz	
9	3290405	2	Nut M4	
10	3290605	4	Nut M6	
11	4460968	1	Connector, Strain Relief	
12	4811400	4	Washer M4	
13	4811700	8	Washer M6	

SECTION 8 - ELECTRICAL

FIGURE 8-8. AC BOX AT PLATFORM INSTALLATION - 220V CEE7 SIDE GROUND WITH 70MM X 70MM BOX (CE SPEC)

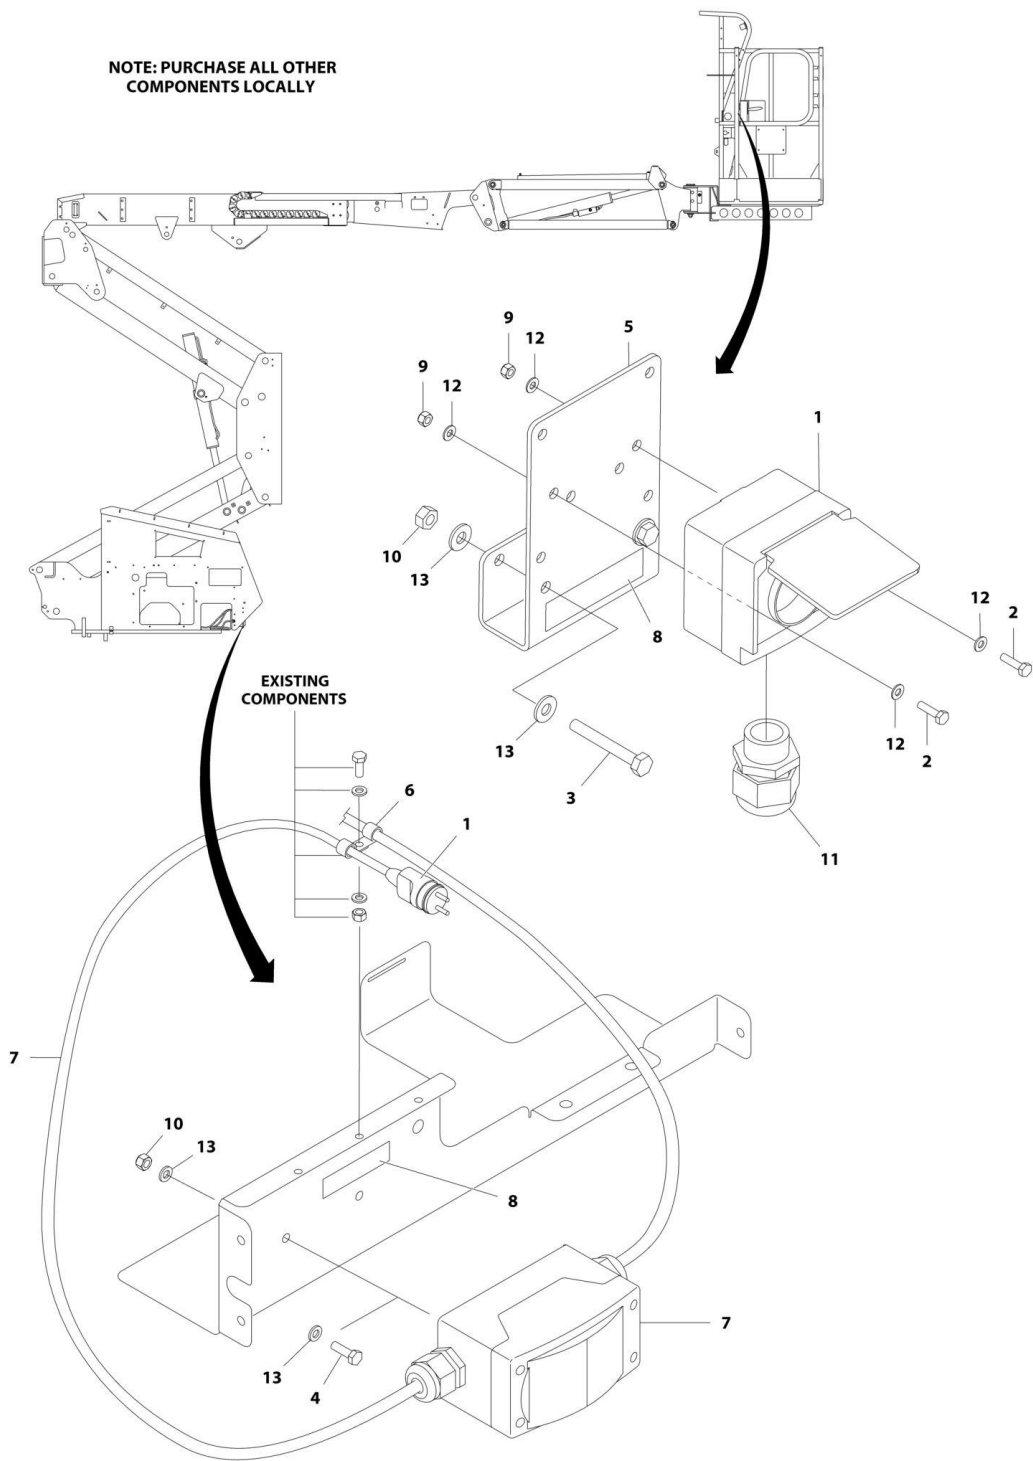

ART_1001119877


SECTION 8 - ELECTRICAL

FIGURE 8-8. AC BOX AT PLATFORM INSTALLATION - 220V CEE7 SIDE GROUND WITH 70MM X 70MM BOX (CE SPEC)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119877	Ref	AC BOX AT PLATFORM INSTALLATION - 220V CEE7 SIDE GROUND WITH 70MM X 70MM BOX	B
1	0275219	1	Receptacle Box Kit (See Separate Breakdown in this Section)	
2	0700408	2	Bolt M4 x 16	
3	0700618	2	Bolt M6 x 50	
4	0760610	2	Bolt M6 x 20	
5	1001193018	1	Bracket	
6	1320043	1	Clamp	
7	2902549	1	Breaker Box Kit (See Separate Breakdown in this Section)	
8	3252507	2	Decal - 220V - 50/60Hz	
9	3290405	2	Nut M4	
10	3290605	4	Nut M6	
11	4460968	1	Connector, Strain Relief	
12	4811400	4	Washer M4	
13	4811700	8	Washer M6	

SECTION 8 - ELECTRICAL

FIGURE 8-9. AC BOX AT PLATFORM INSTALLATION - 220V CEE7 POST GROUND WITH 2IN X 4IN BOX (CE SPEC)

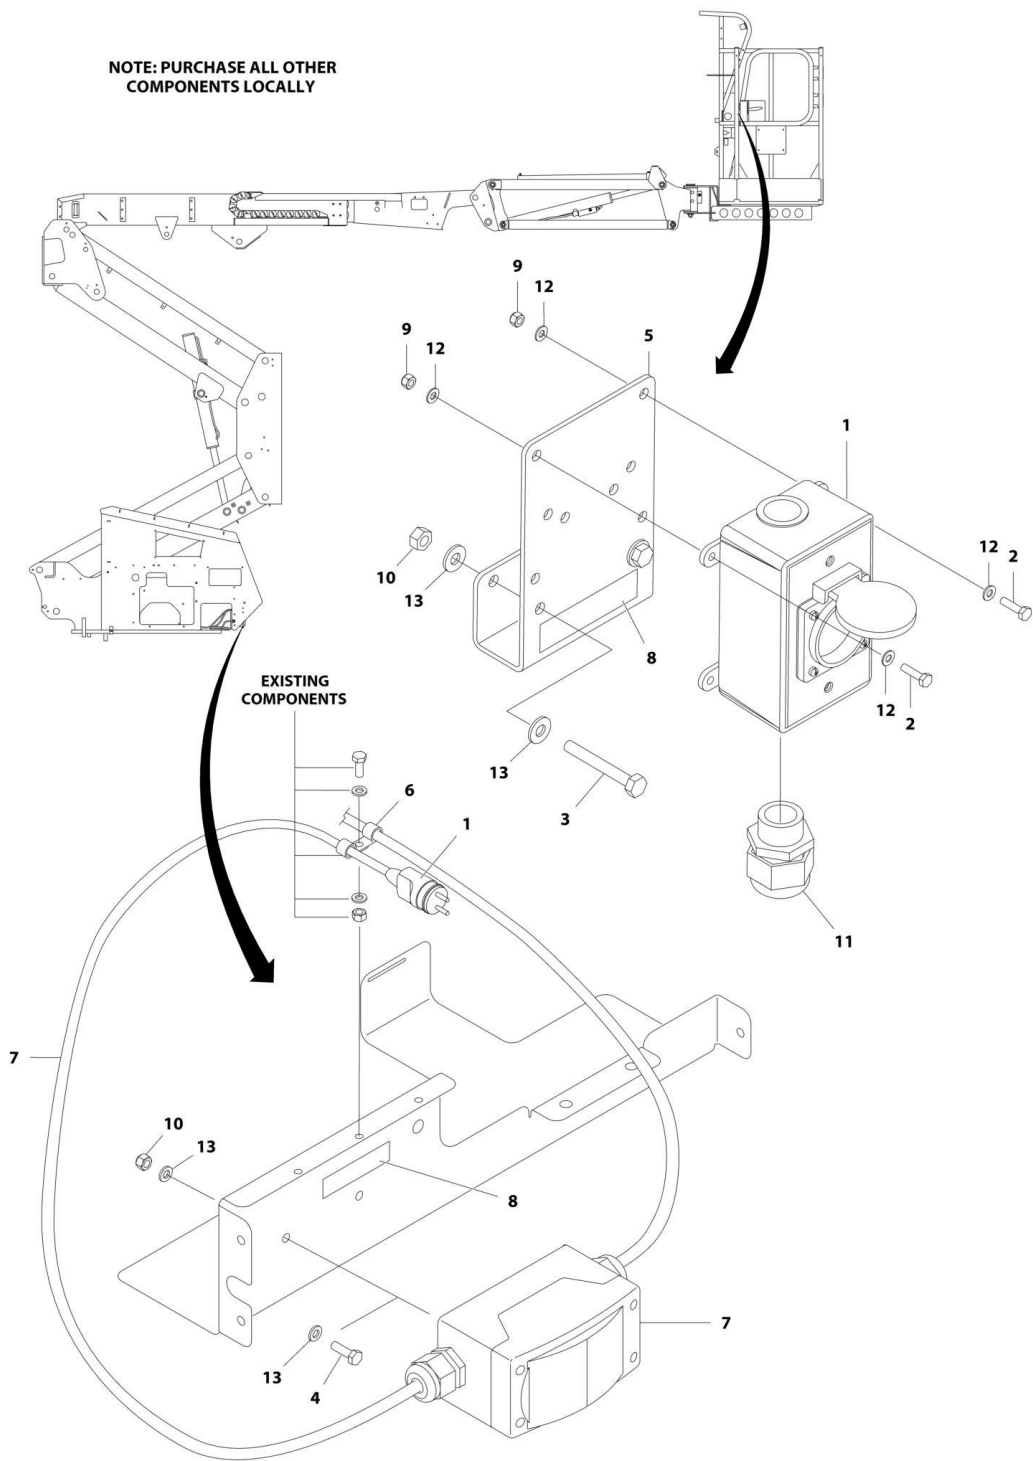

ART_1001119872


SECTION 8 - ELECTRICAL

FIGURE 8-9. AC BOX AT PLATFORM INSTALLATION - 220V CEE7 POST GROUND WITH 2IN X 4IN BOX (CE SPEC)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119872	Ref	AC BOX AT PLATFORM INSTALLATION - 220V CEE7 POST GROUND WITH 2IN X 4IN BOX	C
1	0275452	1	Receptacle Box Kit (See Separate Breakdown in this Section)	
2	0700408	4	Bolt M4 x 16	
3	0700618	2	Bolt M6 x 50	
4	0760610	2	Bolt M6 x 20	
5	1001193018	1	Bracket	
6	1320043	1	Clamp	
7	2902549	1	Breaker Box Kit (See Separate Breakdown in this Section)	
8	3252507	2	Decal - 220V - 50/60Hz	
9	3290405	4	Nut M4	
10	3290605	4	Nut M6	
11	4460662	1	Connector, Strain Relief	
12	4811400	8	Washer M4	
13	4811700	8	Washer M6	

SECTION 8 - ELECTRICAL

FIGURE 8-10. AC BOX AT PLATFORM INSTALLATION - 220V CEE7 SIDE GROUND WITH 2IN X 4IN BOX (CE SPEC)

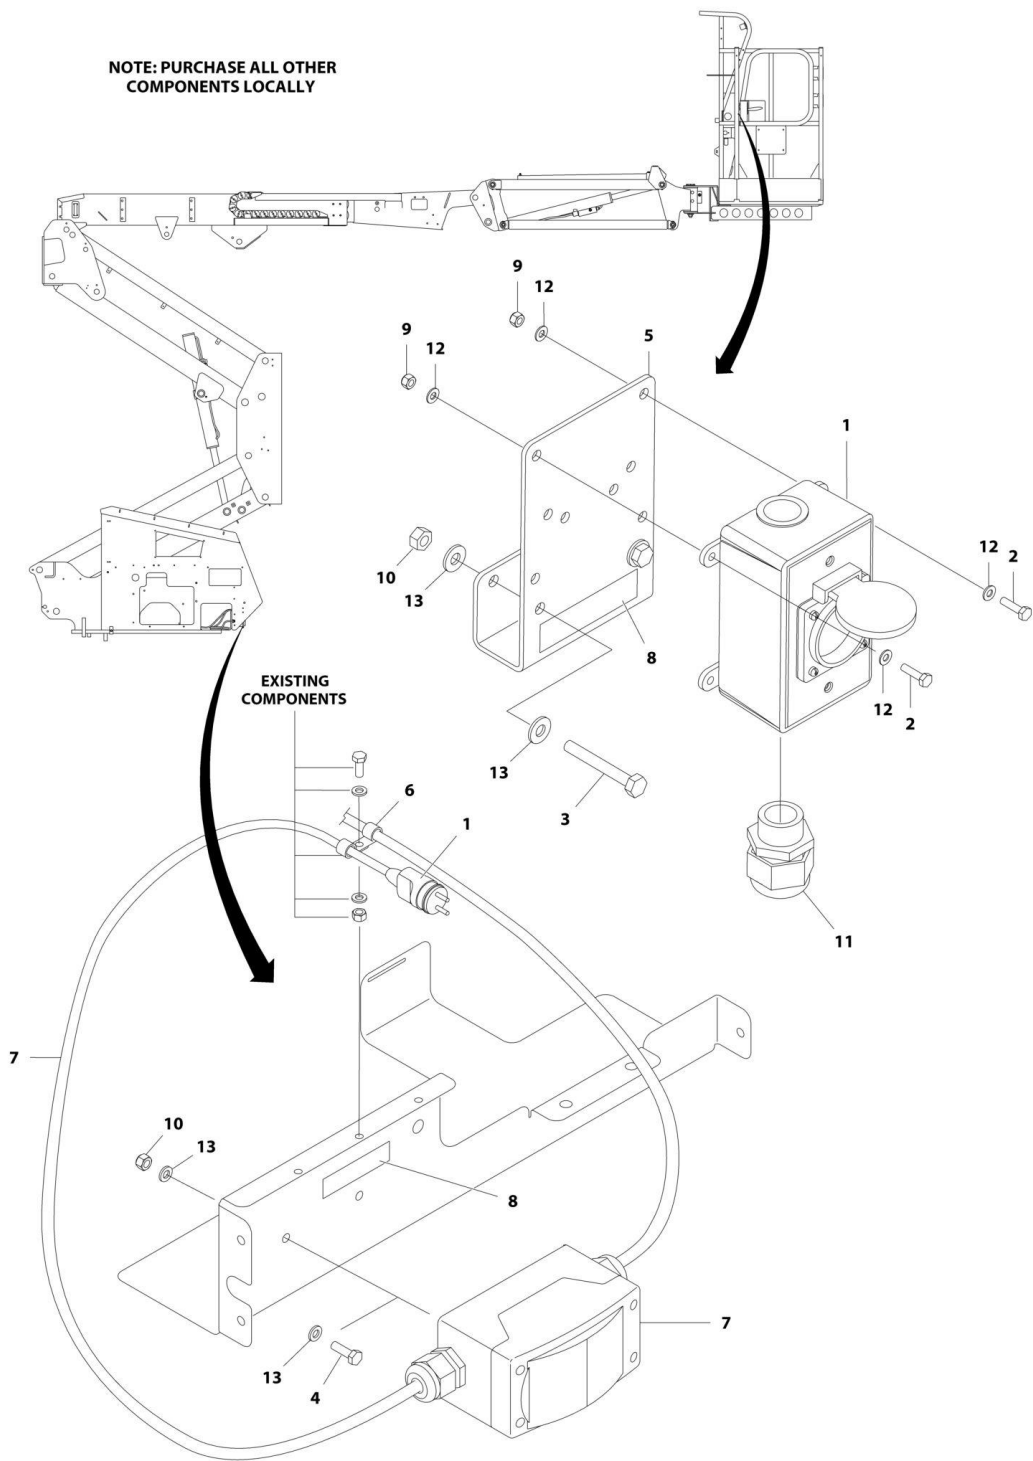

ART_1001119873


SECTION 8 - ELECTRICAL

FIGURE 8-10. AC BOX AT PLATFORM INSTALLATION - 220V CEE7 SIDE GROUND WITH 2IN X 4IN BOX (CE SPEC)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119873	Ref	AC BOX AT PLATFORM INSTALLATION - 220V CEE7 SIDE GROUND WITH 2IN X 4IN BOX	B
1	0275453	1	Receptacle Box Kit (See Separate Breakdown in this Section)	
2	0700408	4	Bolt, M4 x 16	
3	0700618	2	Bolt M6 x 50	
4	0760610	2	Bolt M6 x 20	
5	1001193018	1	Bracket	
6	1320043	1	Clamp	
7	2902549	1	Breaker Box Kit (See Separate Breakdown in this Section)	
8	3252507	2	Decal - 220V - 50/60Hz	
9	3290405	4	Nut M4	
10	3290605	4	Nut M6	
11	4460968	1	Connector, Strain Relief	
12	4811400	8	Washer M4	
13	4811700	8	Washer M6	

SECTION 8 - ELECTRICAL

FIGURE 8-11. AC BOX AT PLATFORM INSTALLATION - 220V AFSINT 107 KEYED GROUND WITH 2IN X 4IN BOX (CE SPEC)

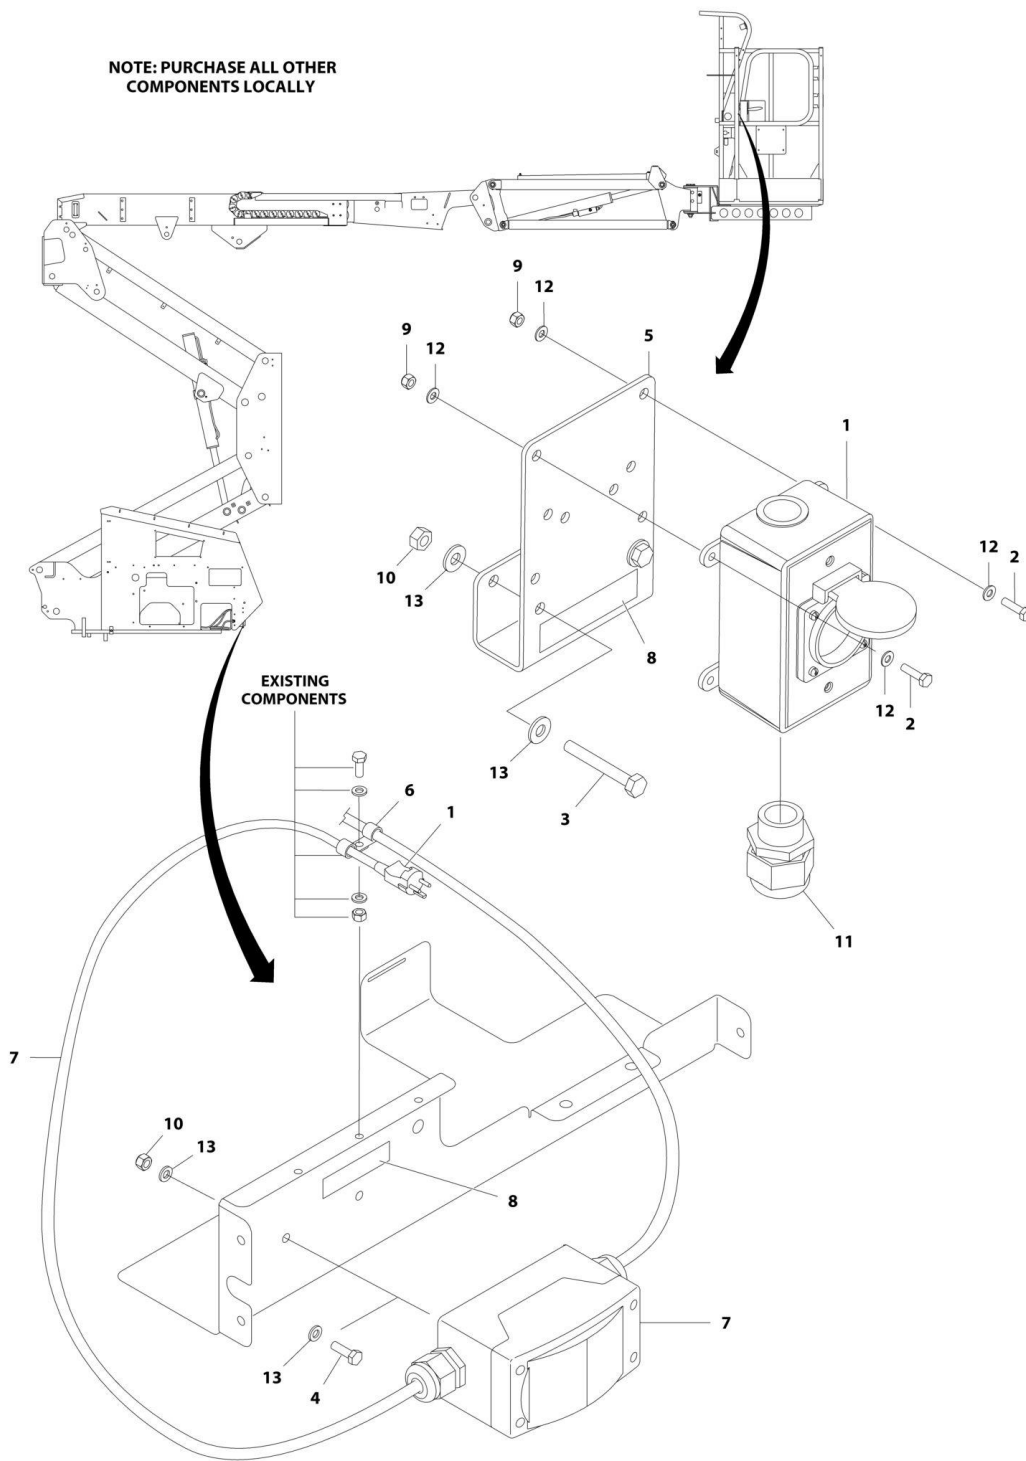

ART_1001119874


SECTION 8 - ELECTRICAL

FIGURE 8-11. AC BOX AT PLATFORM INSTALLATION - 220V AFSINT 107 KEYED GROUND WITH 2IN X 4IN BOX (CE SPEC)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119874	Ref	AC BOX AT PLATFORM INSTALLATION - 220V AFSINT 107 KEYED GROUND WITH 2IN X 4IN BOX	C
1	0275454	1	Receptacle Box Kit (See Separate Breakdown in this Section)	
2	0700408	4	Bolt M4 x 16	
3	0700618	2	Bolt M6 x 50	
4	0760610	2	Bolt M6 x 20	
5	1001193018	1	Bracket	
6	1320043	1	Clamp	
7	2902549	1	Breaker Box Kit (See Separate Breakdown in this Section)	
8	3252507	2	Decal - 220V - 50/60Hz	
9	3290405	4	Nut M4	
10	3290605	4	Nut M6	
11	4460662	1	Connector, Strain Relief	
12	4811400	8	Washer M4	
13	4811700	8	Washer M6	

SECTION 8 - ELECTRICAL

FIGURE 8-12. AC POWER TO PLATFORM CABLE - MAIN BOOM (WITHOUT ARTIC PACKAGE)

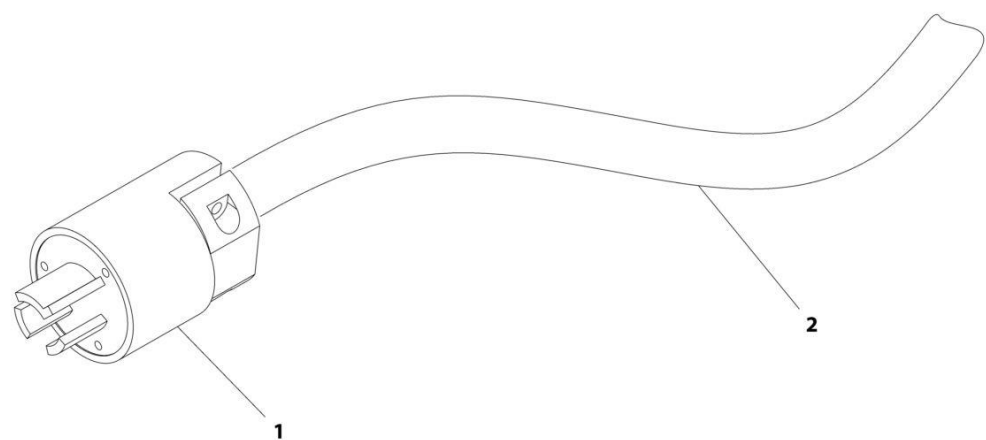

ART_1001119140


SECTION 8 - ELECTRICAL

FIGURE 8-12. AC POWER TO PLATFORM CABLE - MAIN BOOM (WITHOUT ARTIC PACKAGE)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119140	Ref	AC POWER TO PLATFORM CABLE - MAIN BOOM (WITHOUT ARCTIC PACKAGE)	C
1	1001120204	1	Plug, Male	
2	4923505	1	Cable, 14/3	

SECTION 8 - ELECTRICAL

FIGURE 8-13. AC POWER TO PLATFORM CABLE - MAIN BOOM (WITH ARCTIC PACKAGE)

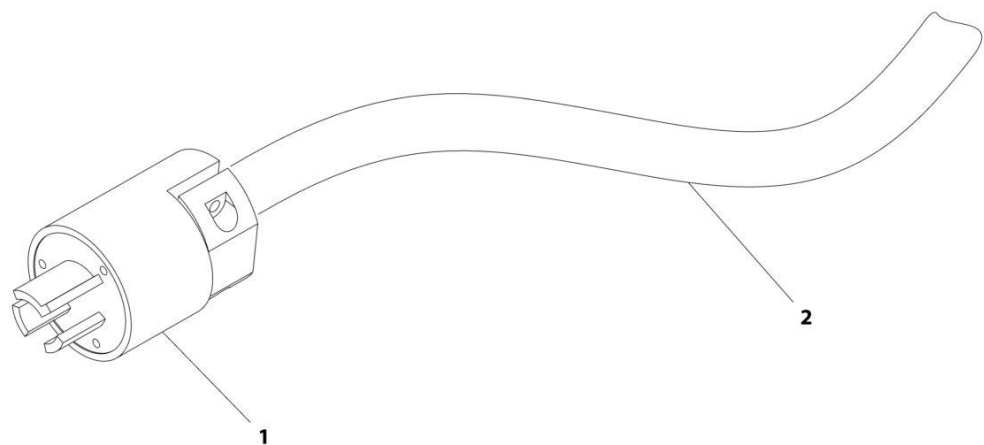

ART_1001119955


SECTION 8 - ELECTRICAL

FIGURE 8-13. AC POWER TO PLATFORM CABLE - MAIN BOOM (WITH ARCTIC PACKAGE)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119955	Ref	AC POWER TO PLATFORM CABLE - MAIN BOOM (WITH ARCTIC PACKAGE)	B
1	1001120204	1	Plug, Male	
2	4923463	1	Cable, 12/3	

SECTION 8 - ELECTRICAL

FIGURE 8-14. AC POWER TO PLATFORM CABLE - TOWER BOOM (WITHOUT ARTIC PACKAGE)

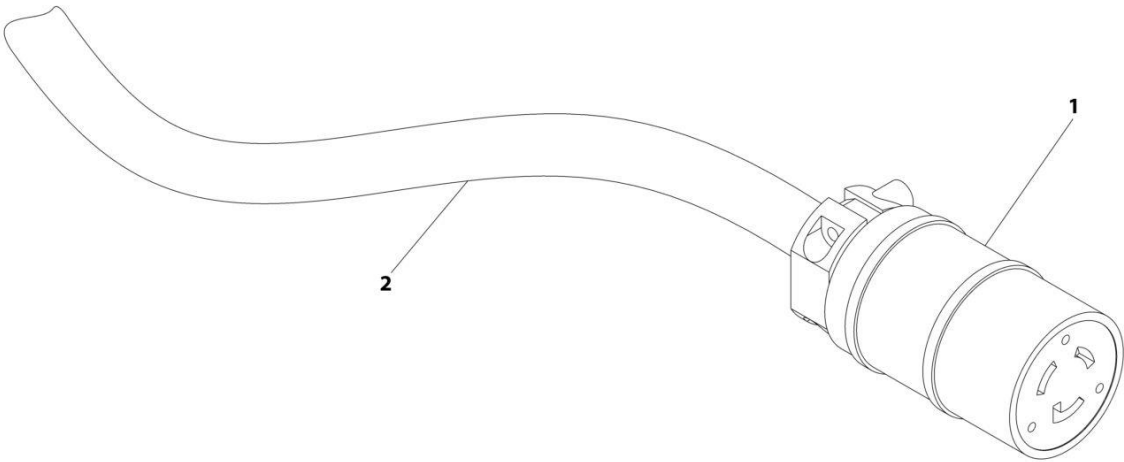

ART_1001119139


SECTION 8 - ELECTRICAL

FIGURE 8-14. AC POWER TO PLATFORM CABLE - TOWER BOOM (WITHOUT ARTIC PACKAGE)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119139	Ref	AC POWER TO PLATFORM CABLE - TOWER BOOM (WITHOUT ARTIC PACKAGE)	B
1	1001120205	1	Connector, Female	
2	4923505	1	Cable, 14/3	

SECTION 8 - ELECTRICAL

FIGURE 8-15. AC POWER TO PLATFORM CABLE - TOWER BOOM (WITH ARTIC PACKAGE)

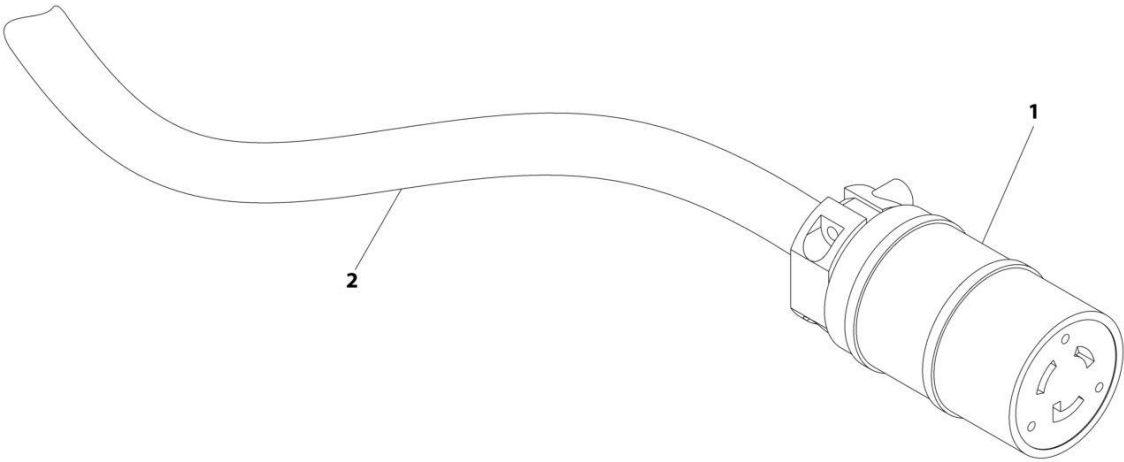

ART_1001119956


SECTION 8 - ELECTRICAL

FIGURE 8-15. AC POWER TO PLATFORM CABLE - TOWER BOOM (WITH ARTIC PACKAGE)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119956	Ref	AC POWER TO PLATFORM CABLE - TOWER BOOM (WITH ARTIC PACKAGE)	A
1	1001120205	1	Connector, Female	
2	4923463	1	Cable, 12/3	

SECTION 8 - ELECTRICAL

FIGURE 8-16. BOOM CABLES, HARNESSES AND CLAMPS INSTALLATION - WITHOUT ARCTIC PACKAGE

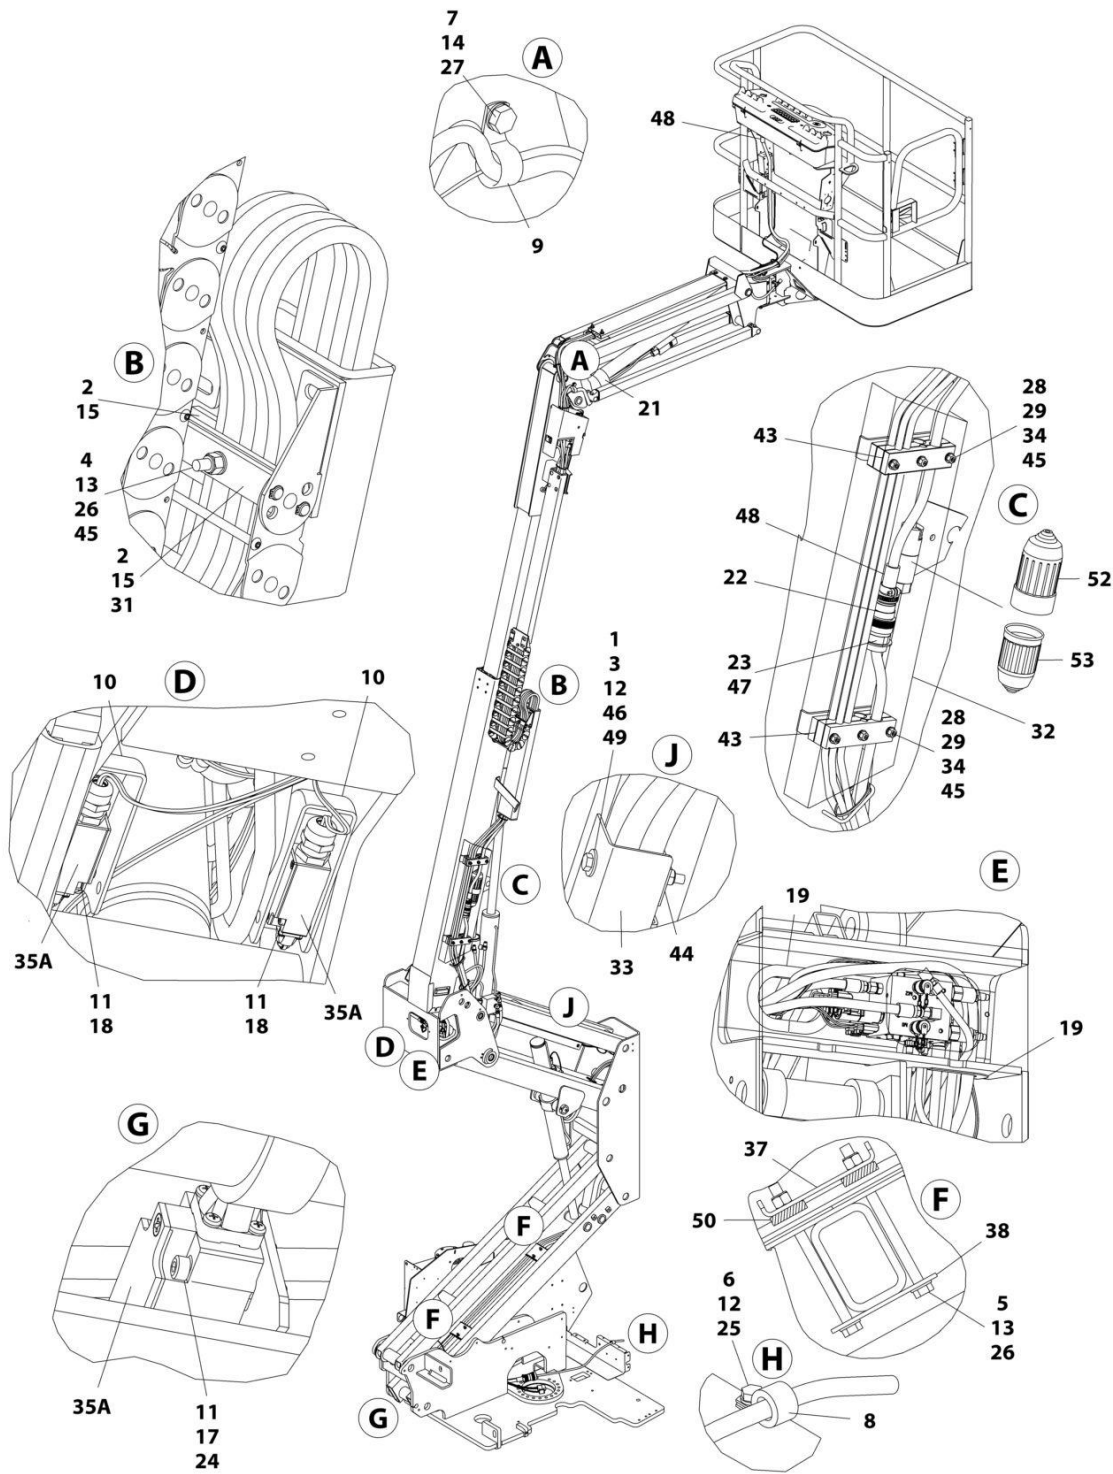

ART_1001115784

SECTION 8 - ELECTRICAL

FIGURE 8-16. BOOM CABLES, HARNESSSES AND CLAMPS INSTALLATION - WITHOUT ARCTIC PACKAGE


ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001115784	Ref	BOOM CABLES, HARNESSSES AND CLAMPS INSTALLATION - WITHOUT ARCTIC PACKAGE	G
1	0100011	AR	Compound, Locking	
2	0100081	1	Adhesive	
3	0760621	4	Bolt M6 x 65	
4	0700820	2	Bolt M8 x 60	
5	0700829	4	Bolt M8 x 120	
6	0760608	1	Bolt M6 x 16 (Not Shown - Use with Item 8)	
7	0761012	1	Bolt M10 x 25	
8	1320043	1	Clamp (Not Shown - Located at Rear of T/T)	
9	1320130	1	Clamp	
10	1670899	2	Cover, Switch	
11	3290405	6	Nut M4	
12	3290605	5	Nut M6	
13	3290805	6	Nut M8	
14	3291005	1	Nut M10	
15	3340939	4	Pad, Rubber	
17	4031510	2	Capscrew M4 x 30	
18	4031512	4	Capscrew M4 x 40	
19	4060808	1.8 ft /55cm	Flex-Trim	
20	4240018	AR	Tie-Strap (Not Shown)	
21	4240156	1	Strap, Cinch	
22	4460865	1	Connector - 19 Position	
23	4460866	1	Connector - 19 Position	
24	4811400	2	Washer M4	
25	4811700	2	Washer M6 (Not Shown - Use with Item 8)	
26	4811900	8	Washer M8	
27	4812000	2	Washer M10	
28	5260800	6	Nut M8	
29	5281920	6	Screw M8 x 80	
31	1001106757	2	Plate	
32	1001107152	1	Plate	
33	1001116433	2	Guard, Hose	
34	1001118274	6	Nut M8	
35	1001118292	1	Tower Boom Harness Assembly (Not Shown - See Separate Breakdown in this Section)	
35A	4360548	3	Switch, Limit	
37	1001118592	2	Plate, Hose Clamp	
38	1001118593	2	Plate, Hose Clamp	
39	1001119018	1	Ground to Platform Cable - Main (Not Shown - See Separate Breakdown in this Section)	
40	1001119019	1	Ground to Platform Cable - Tower (Not Shown - See Separate Breakdown in this Section)	
41	1001119139	1	AC Power to Platform Cable - Tower Boom (Not Shown - See Separate Breakdown in this Section)	
42	1001119140	1	AC Power to Platform Cable - Main Boom (Not Shown - See Separate Breakdown in this Section)	
43	1001119194	2	Clamp	
44	1001119197	4	Clamp	

SECTION 8 - ELECTRICAL

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
45	1001119228	8	Nut M8	
46	0760605	2	Bolt M6 x 10	
47	2820031	AR	Heat Shrink	
48	4460473	1	Clamp, Cable	
49	4811702	10	Washer M6	
50	3340901	4	Pad, Rubber	
51	1001140524	1	Main Boom Harness Assembly (Not Shown - See Separate Breakdown in this Section)	
52	1671092	1	Cover, Connection	
53	1671093	1	Cover, Plug	

SECTION 8 - ELECTRICAL

FIGURE 8-17. BOOM CABLES, HARNESSES AND CLAMPS INSTALLATION - WITH ARCTIC PACKAGE

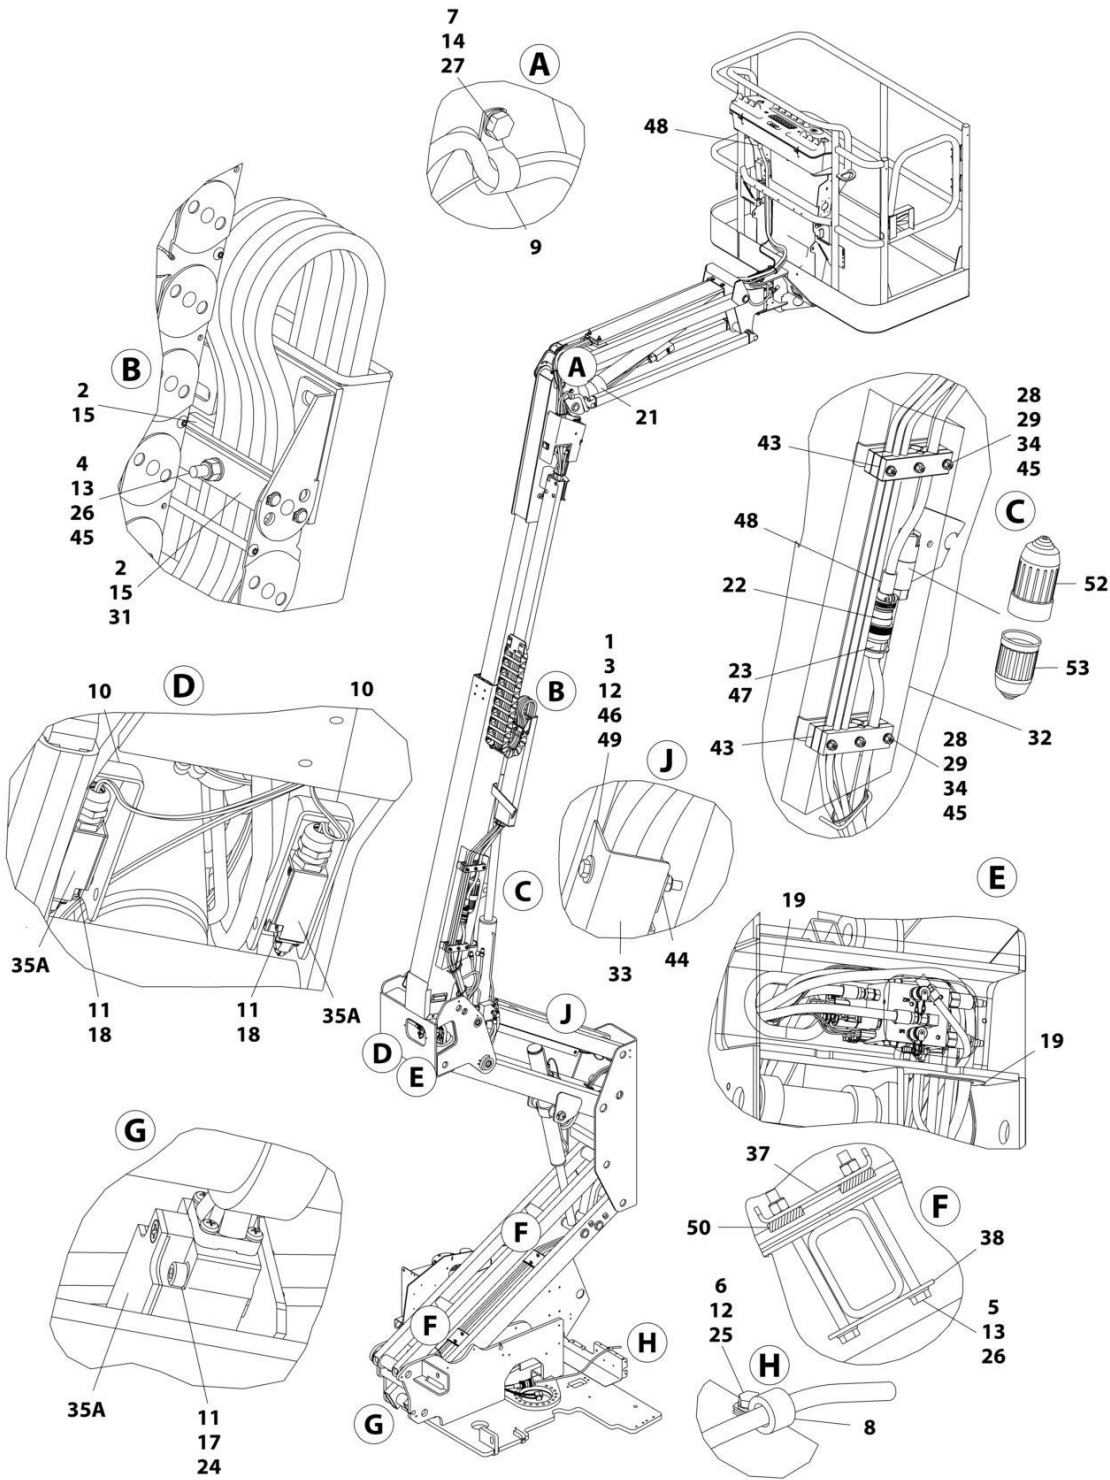

ART_1001119937

SECTION 8 - ELECTRICAL

FIGURE 8-17. BOOM CABLES, HARNESSSES AND CLAMPS INSTALLATION - WITH ARCTIC PACKAGE


ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119937	Ref	BOOM CABLES, HARNESSSES AND CLAMPS INSTALLATION - WITH ARCTIC PACKAGE	G
1	0100011	AR	Compound, Locking	
2	0100081	1	Adhesive	
3	0760621	4	Bolt M6 x 65	
4	0700820	2	Bolt M8 x 60	
5	0700829	4	Bolt M8 x 120	
6	0760608	1	Bolt M6 x 16 (Not Shown - Use with Item 8)	
7	0761012	1	Bolt M10 x 25	
8	1320041	1	Clamp	
9	1320130	1	Clamp	
10	1670899	2	Cover, Switch	
11	3290405	6	Nut M4	
12	3290605	5	Nut M6	
13	3290805	6	Nut M8	
14	3291005	1	Nut M10	
15	3340939	4	Pad, Rubber	
17	4031510	2	Capscrew M4 x 30	
18	4031512	4	Capscrew M4 x 40	
19	4060808	1.8 ft /55cm	Flex-Trim	
20	4240018	AR	Tie-Strap (Not Shown)	
21	4240156	1	Strap, Cinch	
22	4460865	1	Connector - 19 Position	
23	4460866	1	Connector - 19 Position	
24	4811400	2	Washer M4	
25	4811700	2	Washer M6 (Not Shown - Use with Item 8)	
26	4811900	8	Washer M8	
27	4812000	2	Washer M10	
28	5260800	6	Nut M8	
29	5281920	6	Screw M8 x 80	
31	1001106757	2	Plate	
32	1001107152	1	Plate	
33	1001116433	2	Guard, Hose	
34	1001118274	6	Nut M8	
35	1001118292	1	Tower Boom Harness Assembly (Not Shown - See Separate Breakdown in this Section)	
35A	4360548	3	Switch, Limit	
37	1001118592	2	Plate, Hose Clamp	
38	1001118593	2	Plate, Hose Clamp	
39	1001119953	1	Ground to Platform Cable - Main (Not Shown - See Separate Breakdown in this Section)	
40	1001119954	1	Ground to Platform Cable - Tower (Not Shown - See Separate Breakdown in this Section)	
41	1001119955	1	AC Power to Platform Cable - Main Boom (Not Shown - See Separate Breakdown in this Section)	
42	1001119956	1	AC Power to Platform Cable - Tower Boom (Not Shown - See Separate Breakdown in this Section)	
43	1001119195	2	Clamp	
44	1001119197	4	Clamp	

SECTION 8 - ELECTRICAL

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
45	1001119228	8	Nut M8	
46	0760605	2	Bolt M6 x 10	
47	2820031	AR	Heat Shrink	
48	4460473	1	Clamp, Cable	
49	4811702	10	Washer M6	
50	3340901	4	Pad, Rubber	
51	1001140524	1	Main Boom Harness Assembly (Not Shown - See Separate Breakdown in this Section)	
52	1671092	1	Cover, Connection	
53	1671093	1	Cover, Plug	

SECTION 8 - ELECTRICAL

FIGURE 8-18. BOOM HARNESS - MAIN

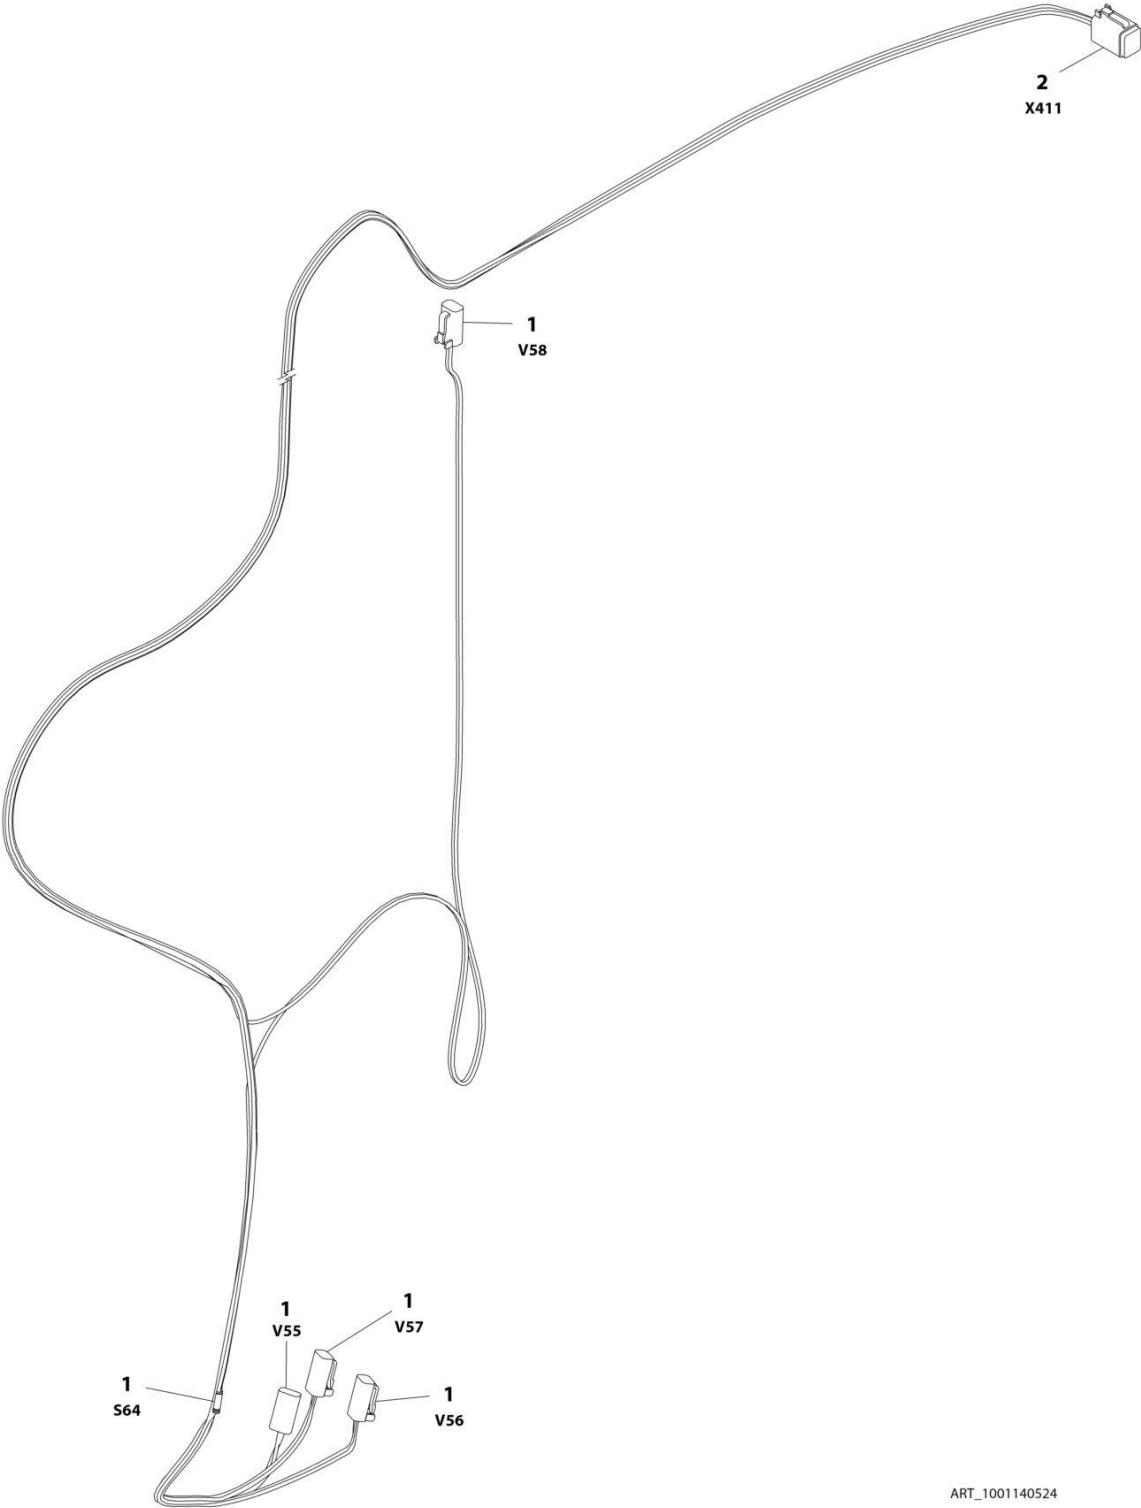

ART_1001140524


SECTION 8 - ELECTRICAL

FIGURE 8-18. BOOM HARNESS - MAIN

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001140524	Ref	BOOM HARNESS - MAIN	A
1	4460891	4	Plug, Male - 2 Position	
1	4460465	8	Socket, Female	
2	4460894	1	Plug, Male - 6 Position	
2	4460465	5	Socket, Female	
2	4460466	1	Plug, Terminal	

SECTION 8 - ELECTRICAL

FIGURE 8-19. BOOM HARNESS - TOWER

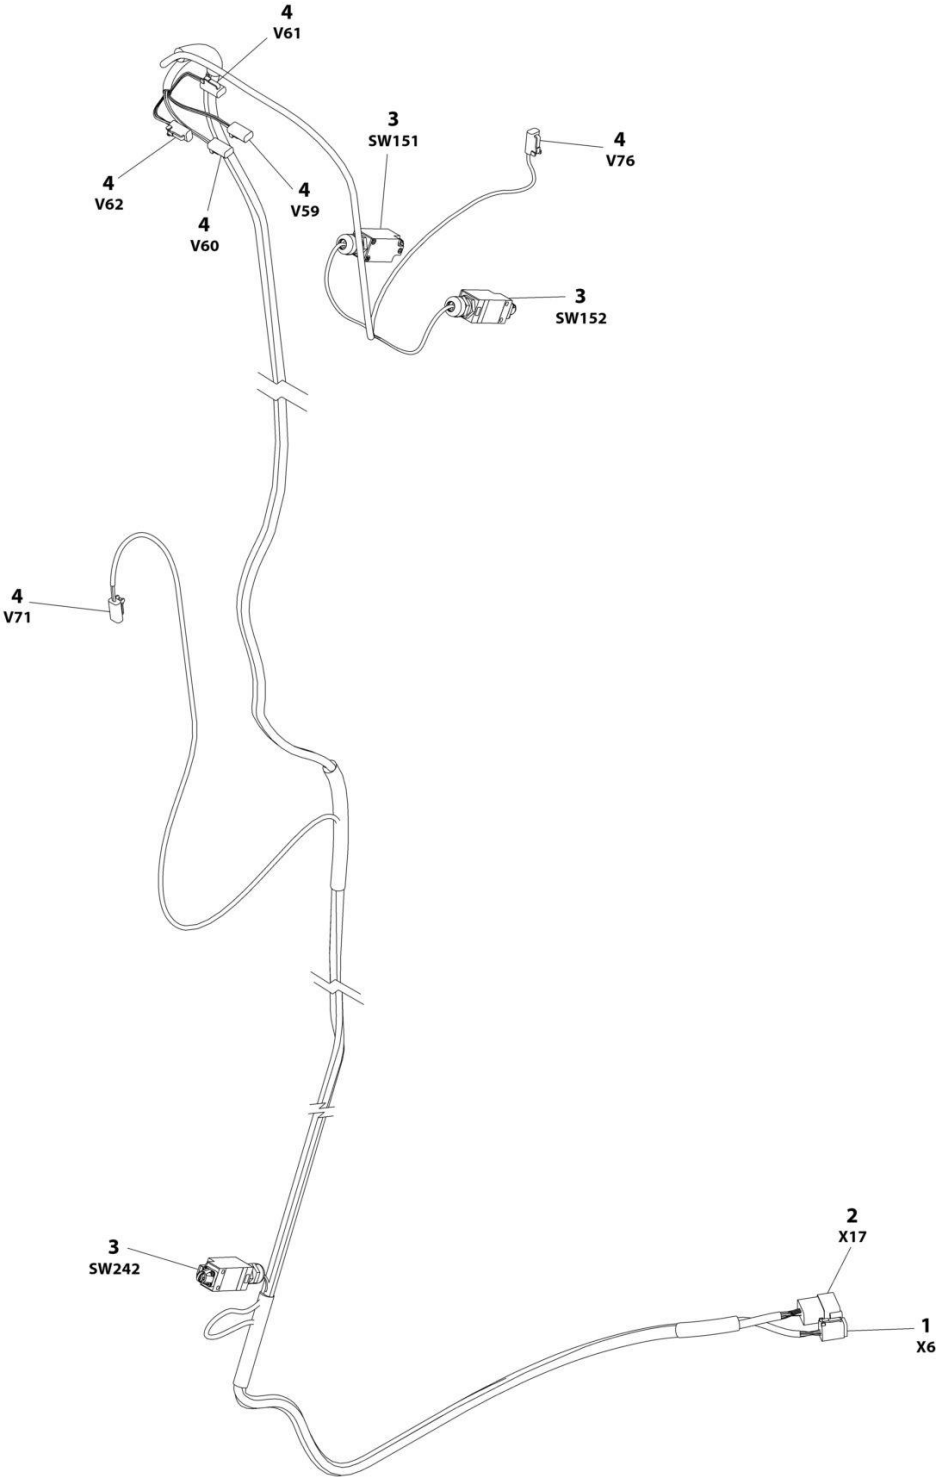

ART_1001118292


SECTION 8 - ELECTRICAL

FIGURE 8-19. BOOM HARNESS - TOWER

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001118292	Ref	BOOM HARNESS - LIMIT SWITCHES AND UPRIGHT VALVE	D
1	4460894	1	Plug, Male - 6 Position	
1	4460465	6	Socket, Female	
2	4460970	1	Receptacle, Female - 12 Position	
2	4460464	9	Pin, Male	
2	4460466	3	Plug, Terminal	
3	4360548	3	Switch, Limit	
3	4460968	3	Connector, Strain Relief	
3	0962449	3	Bushing	
4	4460891	6	Plug, Male - 2 Position	
4	4460465	12	Socket, Female	
5	1001257690	1	Connector, Strain Relief 90 (Not Shown)	

SECTION 8 - ELECTRICAL

FIGURE 8-20. BREAKER BOX KIT (CE SPEC)

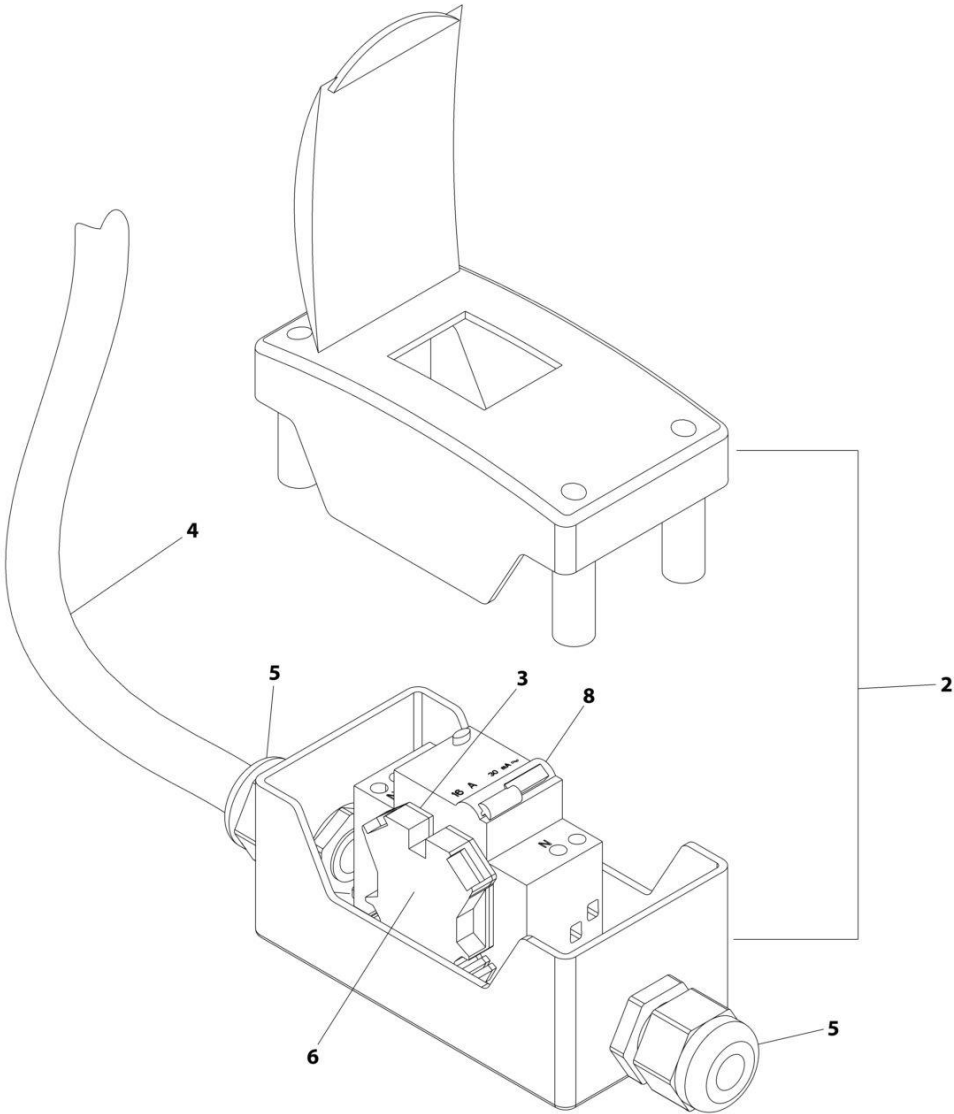

ART_2902549


SECTION 8 - ELECTRICAL

FIGURE 8-20. BREAKER BOX KIT (CE SPEC)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	2902549	Ref	BREAKER BOX KIT - 110/220V 16AMP BREAKER	F
2	0861880	1	Box	
3	4460956	1	Barrier, Terminal	
4	1060908	6 ft/1.8m	Cable, 12/3	
5	1001097150	2	Connector, Strain Relief	
6	4460957	1	Block, Terminal	
8	1001181045	1	Breaker, Combination 16Amp/30mAmp	

SECTION 8 - ELECTRICAL

FIGURE 8-21. CHARGER HARNESS

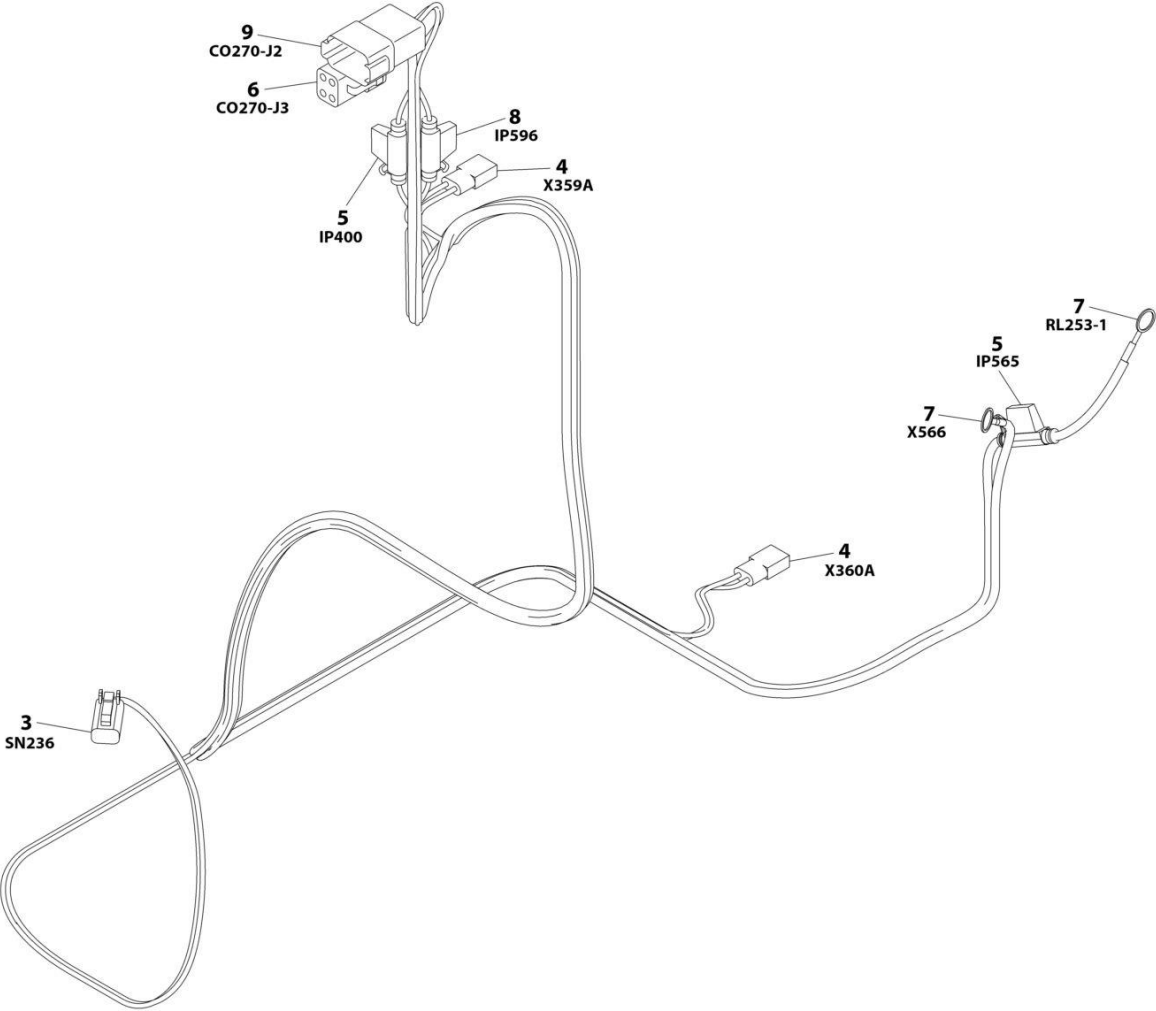

ART_1001167538


SECTION 8 - ELECTRICAL

FIGURE 8-21. CHARGER HARNESS

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001167538	Ref	CHARGER HARNESS	G
3	4460891	1	Connector - 2 Position	
3	4460465	2	Socket, Female	
4	4460424	2	Connector - 2 Position	
4	4460268	4	Socket, Female	
5	1001170763	2	Fuseholder Less Fuse	
5	1001170762	2	Fuse 30Amp	
6	1001116810	1	Connector - 4 Position	
6	4460509	4	Terminal	
7	4460019	2	Ring, Terminal	
8	2400060	1	Fuseholder Less Fuse	
8	1001186489	1	Fuse 2Amp	
9	4460931	1	Connector - 8 Position	
9	4460464	2	Pin, Male	
9	4460466	6	Plug, Terminal	

SECTION 8 - ELECTRICAL

FIGURE 8-22. DRIVE CABLES INSTALLATION

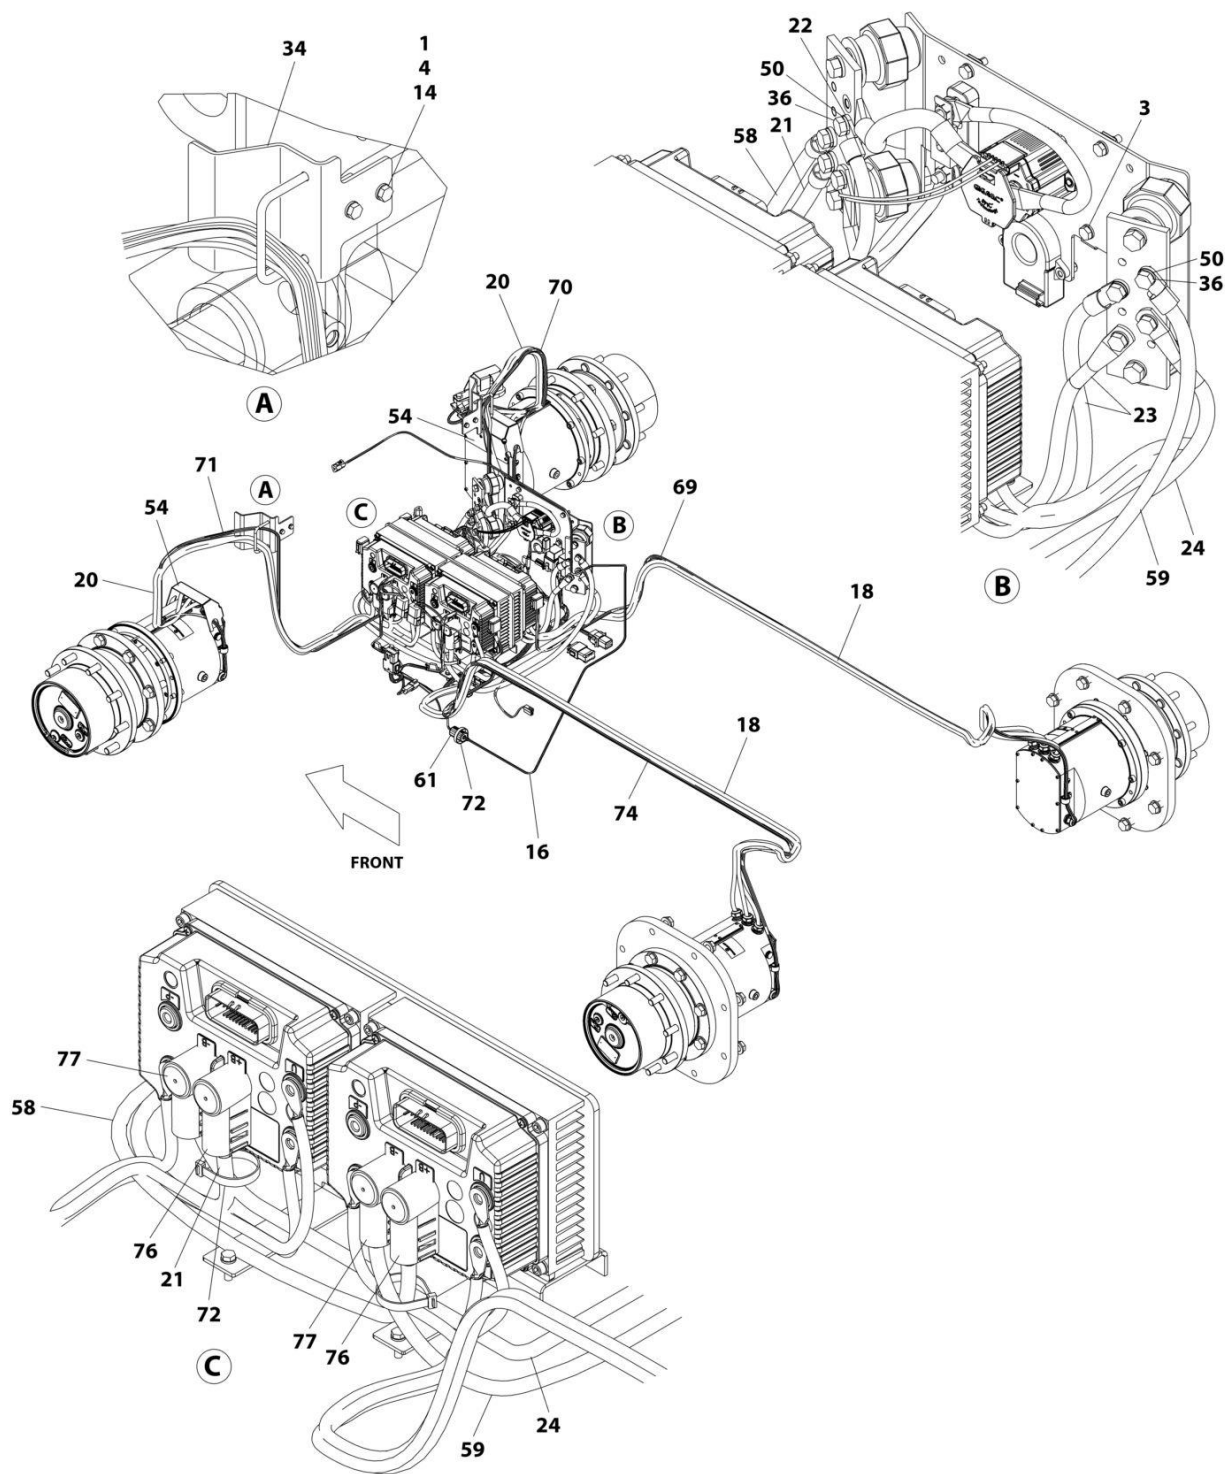

ART_1001169292_2OF2


SECTION 8 - ELECTRICAL

FIGURE 8-22. DRIVE CABLES INSTALLATION

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001169292	Ref	DRIVE CABLES INSTALLATION	T
1	0100011	AR	Compound, Locking	
3	0760607	2	Bolt M6 x 14	
4	0760608	4	Bolt M6 x 16	
14	4811700	4	Washer M6	
16	1001161871	1	Harness, Traction (See Separate Breakdown in this Section)	
18	1001161891	2	Cable, Rear Drive	
20	1001161924	2	Cable, Front Drive	
21	1001161943	1	Cable, Bussbar to Controller B+ (Operators LH Side)	
22	1001161944	2	Cable, Bussbar to Controller B+ (Operators RH Side)	
23	1001161948	2	Cable, Bussbar B- to Controller B- (Operators RH Side)	
24	1001161949	1	Cable, Bussbar B- to Controller B- (Operators LH Side)	
34	1001171301	2	Bracket	
36	0760808	AR	Bolt M8 x 16	
50	4831900	8	Washer M8	
54	1001184793	2	Bracket	
58	1001193549	1	Cable, Bussbar to Controller B+ (Operators LH Side)	
59	1001193550	1	Cable, Bussbar to Controller B+ (Operators LH Side)	
61	1001197942	AR	Ferrite	
69	1001190529	1	Harness, Rear Right Drive (See Separate Breakdown in this Section)	
70	1001190530	1	Harness, Front Drive with Steer (See Separate Breakdown in this Section)	
71	1001190531	1	Harness, Front Drive without Steer (See Separate Breakdown in this Section)	
72	4240018	AR	Tie-Strap	
74	1001211947	1	Harness, Rear Left Drive (See Separate Breakdown in this Section)	
76	1001225558	4	Boot, Red	
77	1001225557	4	Boot, Black	

SECTION 8 - ELECTRICAL

FIGURE 8-23. DRIVE HARNESS - REAR RIGHT

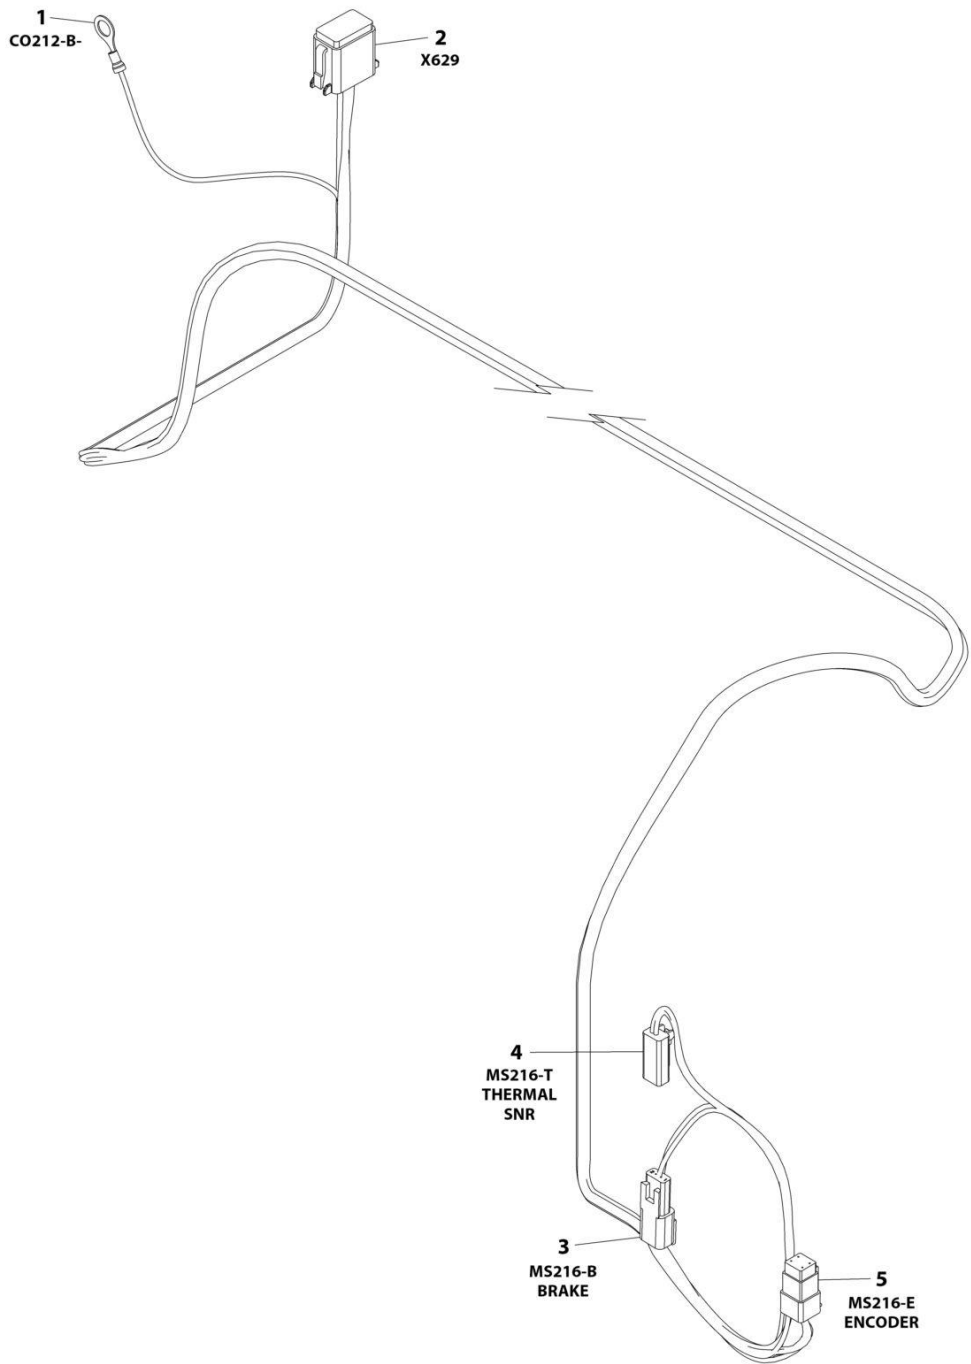

ART_1001190529


SECTION 8 - ELECTRICAL

FIGURE 8-23. DRIVE HARNESS - REAR RIGHT

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001190529	Ref	DRIVE HARNESS - REAR RIGHT	F
1	4460702	1	Terminal, Ring	
2	4460930	1	Plug, Male - 8 Position	
2	4460465	8	Socket, Female	
3	1001153612	1	Receptacle, Female - 2 Position	
3	4460929	2	Pin, Male	
4	4461290	1	Plug, Male - 2 Position	
4	4460928	2	Socket, Female	
5	4461077	1	Plug, Male - 4 Position	
5	4460928	4	Socket, Female	

SECTION 8 - ELECTRICAL

FIGURE 8-24. DRIVE HARNESS - REAR LEFT

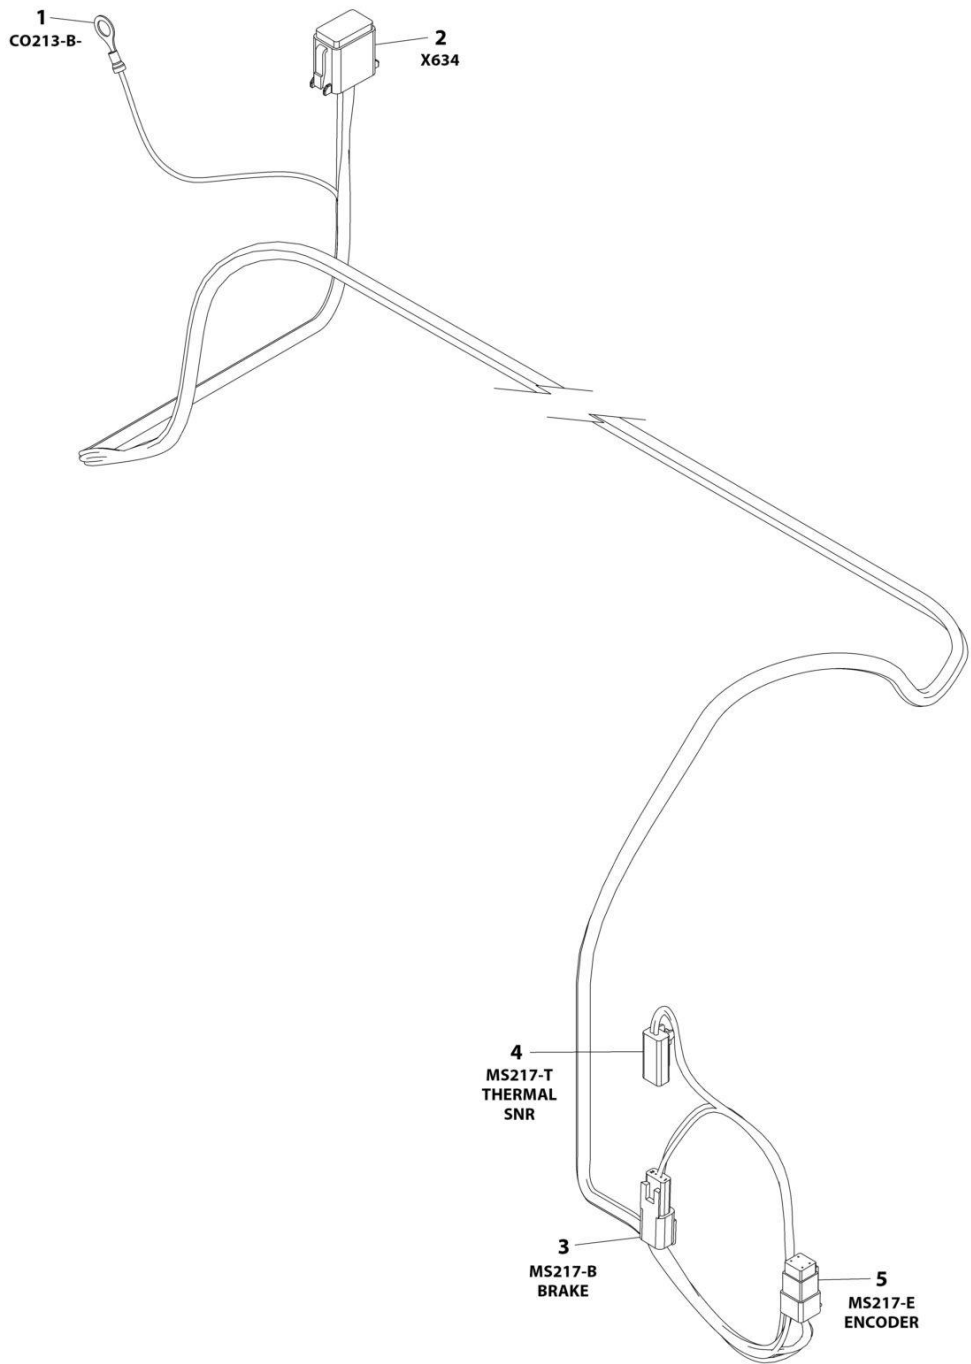

ART_1001211947


SECTION 8 - ELECTRICAL

FIGURE 8-24. DRIVE HARNESS - REAR LEFT

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001211947	Ref	DRIVE HARNESS - REAR LEFT	B
1	4460702	1	Terminal, Ring	
2	4460930	1	Plug, Male - 8 Position	
2	4460465	8	Socket, Female	
3	1001153612	1	Receptacle, Female - 2 Position	
3	4460929	2	Pin, Male	
4	4461290	1	Plug, Male - 2 Position	
4	4460928	2	Socket, Female	
5	4461077	1	Plug, Male - 4 Position	
5	4460928	4	Socket, Female	

SECTION 8 - ELECTRICAL

FIGURE 8-25. DRIVE HARNESS - FRONT WITH STEER

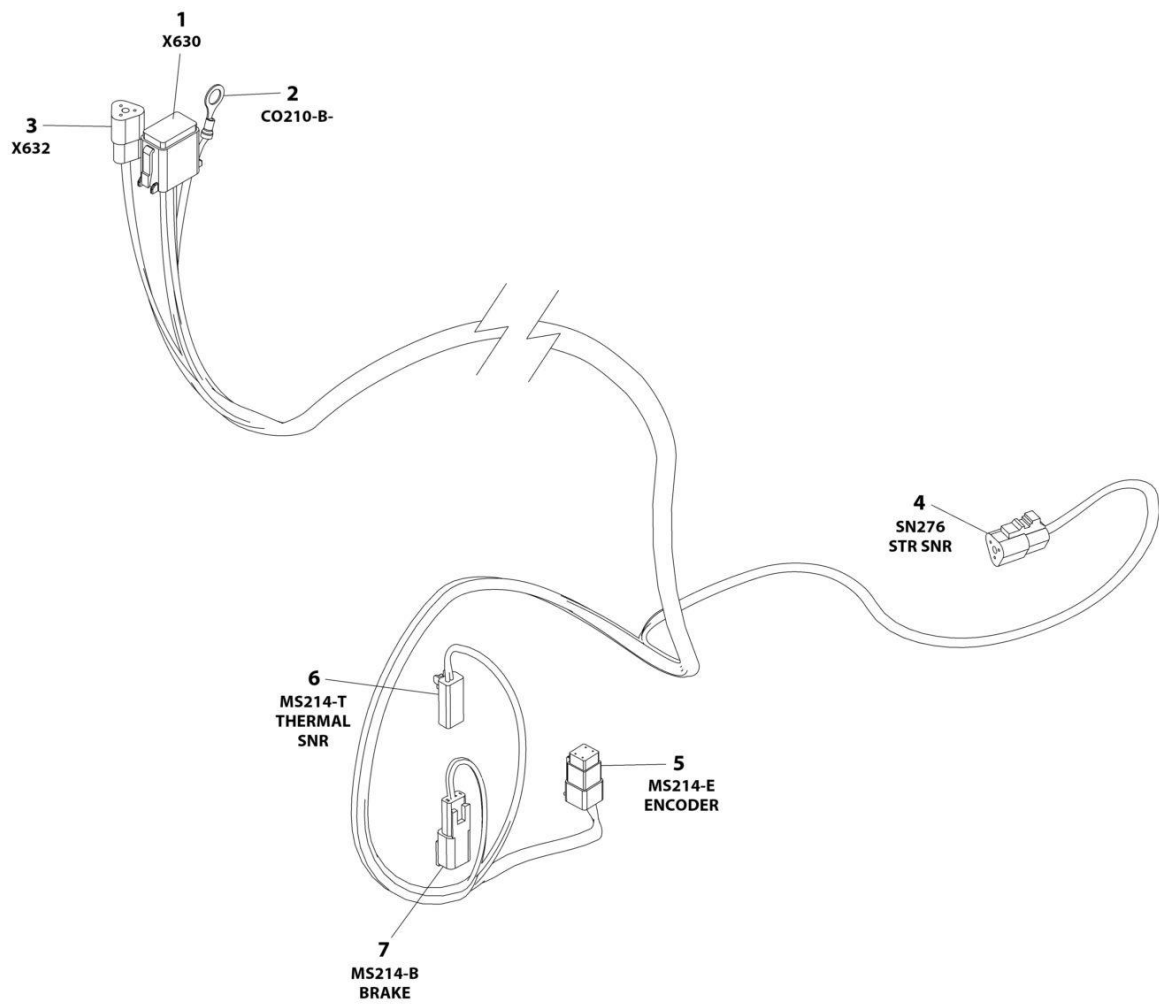

ART_1001190530


SECTION 8 - ELECTRICAL

FIGURE 8-25. DRIVE HARNESS - FRONT WITH STEER

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001190530	Ref	DRIVE HARNESS - FRONT WITH STEER	E
1	4460930	1	Plug, Male - 8 Position	
1	4460465	8	Socket, Female	
2	4460702	1	Terminal, Ring	
3	4460539	2	Plug, Male - 3 Position	
3	4460465	4	Socket, Female	
4	4460539	2	Plug, Male - 3 Position	
4	4460944	4	Socket, Female	
5	4461077	1	Plug, Male - 4 Position	
5	4460928	4	Socket, Female	
6	4461290	1	Plug, Male - 2 Position	
6	4460928	2	Socket, Female	
7	1001153612	1	Receptacle, Female - 2 Position	
7	4460929	2	Pin, Male	

SECTION 8 - ELECTRICAL

FIGURE 8-26. DRIVE HARNESS - FRONT WITHOUT STEER

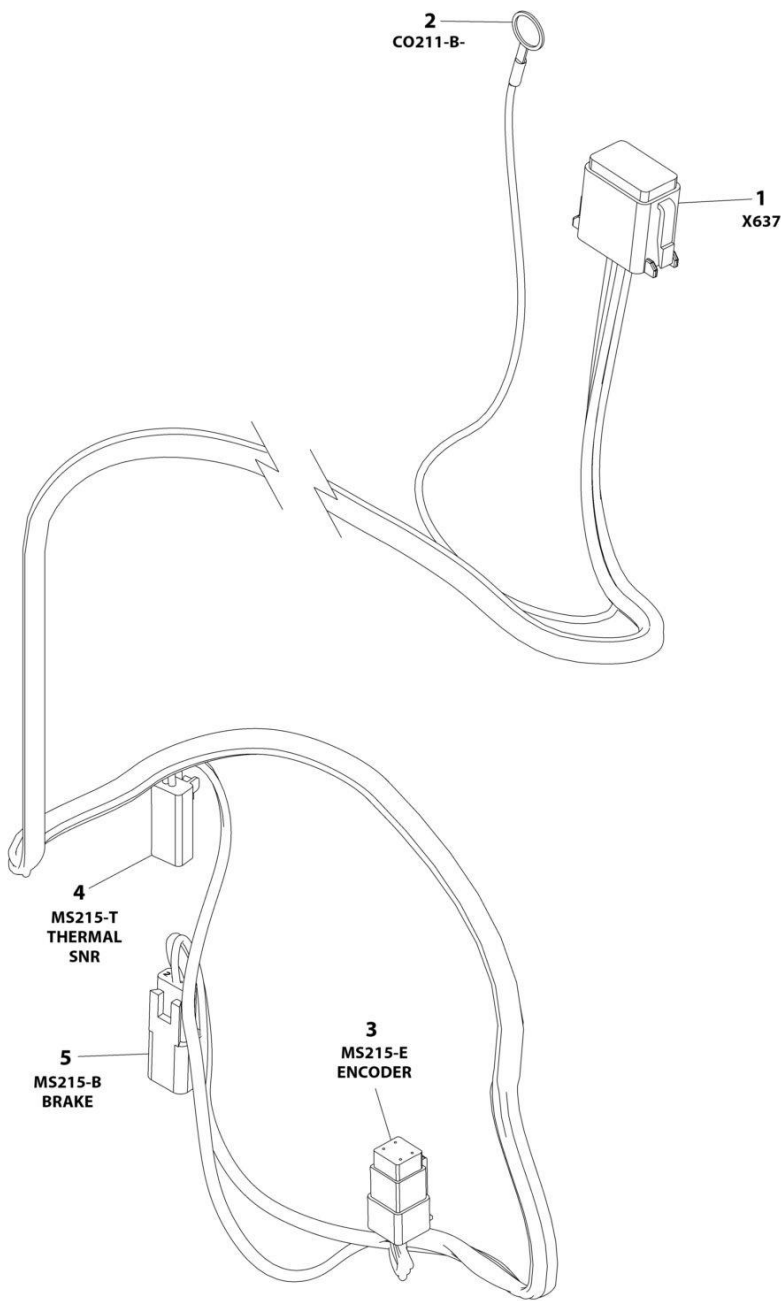

ART_1001190531


SECTION 8 - ELECTRICAL

FIGURE 8-26. DRIVE HARNESS - FRONT WITHOUT STEER

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001190531	Ref	DRIVE HARNESS - FRONT WITHOUT STEER	F
1	4460930	1	Plug, Male - 8 Position	
1	4460465	8	Socket, Female	
2	4460702	1	Terminal, Ring	
3	4461077	1	Plug, Male - 4 Position	
3	4460928	4	Socket, Female	
4	4461290	1	Plug, Male - 2 Position	
4	4460928	2	Socket, Female	
5	1001153612	1	Receptacle, Female - 2 Position	
5	4460929	2	Pin, Male	

SECTION 8 - ELECTRICAL

FIGURE 8-27. ENGINE CABLES INSTALLATION

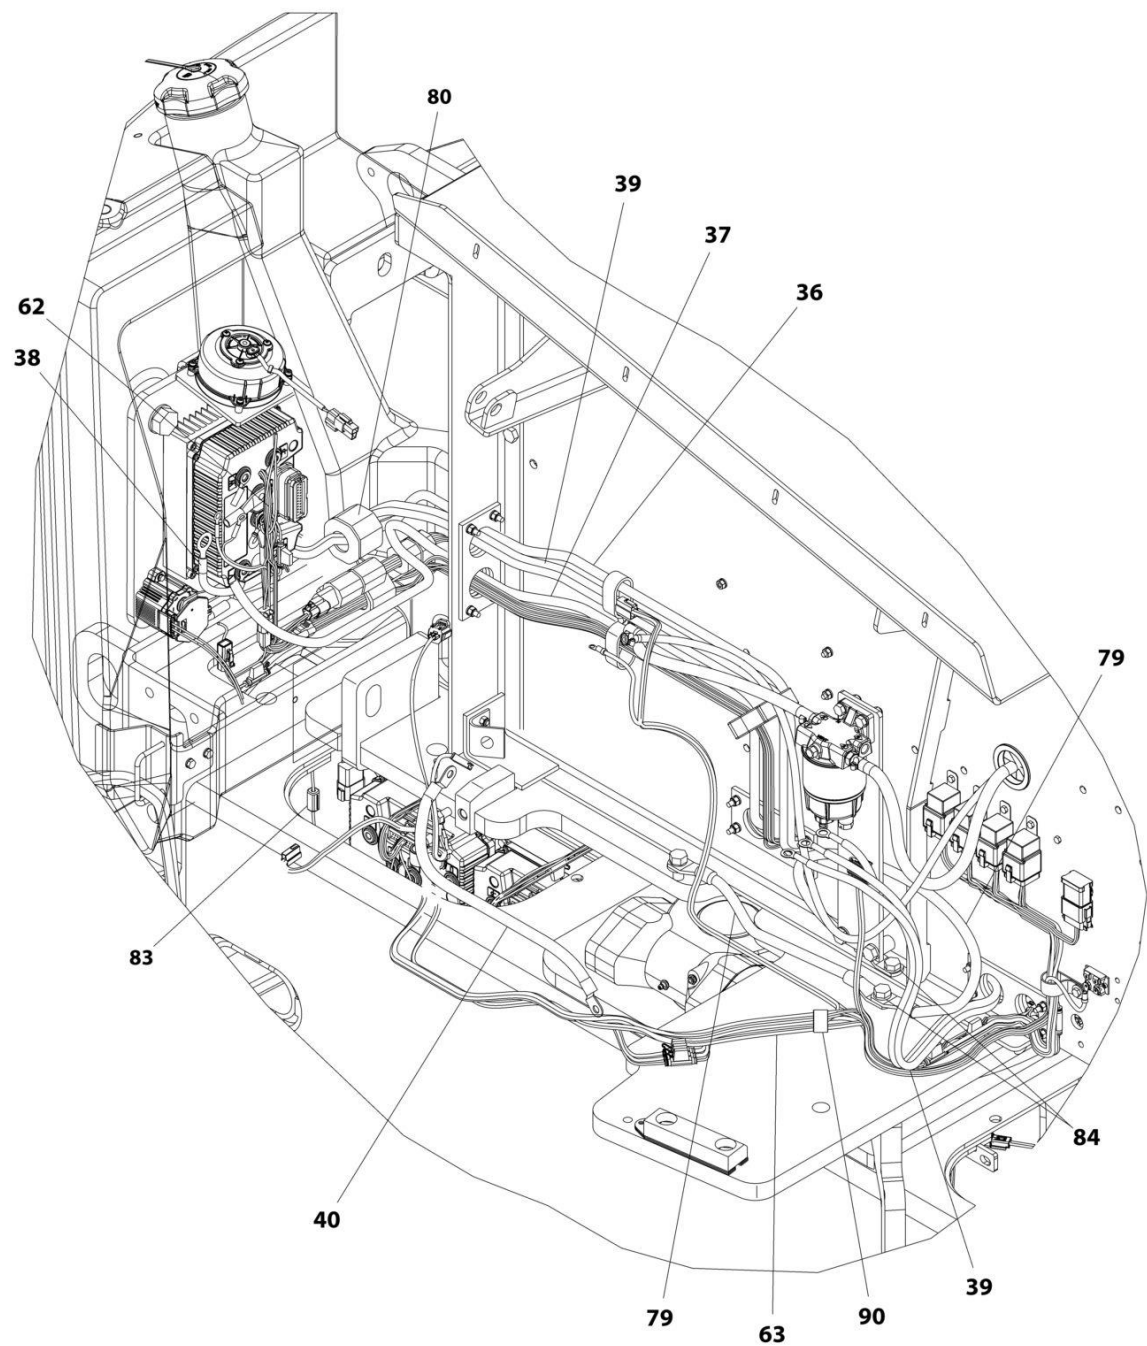

ART_1001168098_30F3


SECTION 8 - ELECTRICAL

FIGURE 8-27. ENGINE CABLES INSTALLATION

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001168098	Ref	ENGINE CABLES INSTALLATION	K
36	1001164412	1	Cable, Drive Controller Positive to Zapi Controller	
37	1001164418	1	Cable, Drive Controller Negative to Zapi Controller	
38	1001164494	1	Cable, Controller to Zapi Controller	
39	1001164495	1	Cable, Generator	
40	1001164654	1	Cable, Positive Jumper	
62	1001177378	1	Generator Harness Assembly (See Separate Breakdown in this Section)	
63	1001177433	1	Engine Harness Assembly (See Separate Breakdown in this Section)	
74	0760808	2	Bolt M8 x 16 (Not Shown - Attaches Item 37 at Frame Module and Item 79 to Engine)	
75	4831900	2	Washer M8 (Not Shown - Attaches Item 37 at Frame Module and Item 79 to Engine)	
77	4240033	AR	Tie-Strap (Not Shown)	
79	1001197652	1	Strap, Ground	
80	1001197941	1	Ferrite	
83	1001197944	1	Ferrite	
84	4872000	2	Washer M10	
85	4792000	1	Washer 5/8 (Not Shown - Use with Item 74)	
90	85031405	1	Support	

SECTION 8 - ELECTRICAL

FIGURE 8-28. ENGINE HARNESS

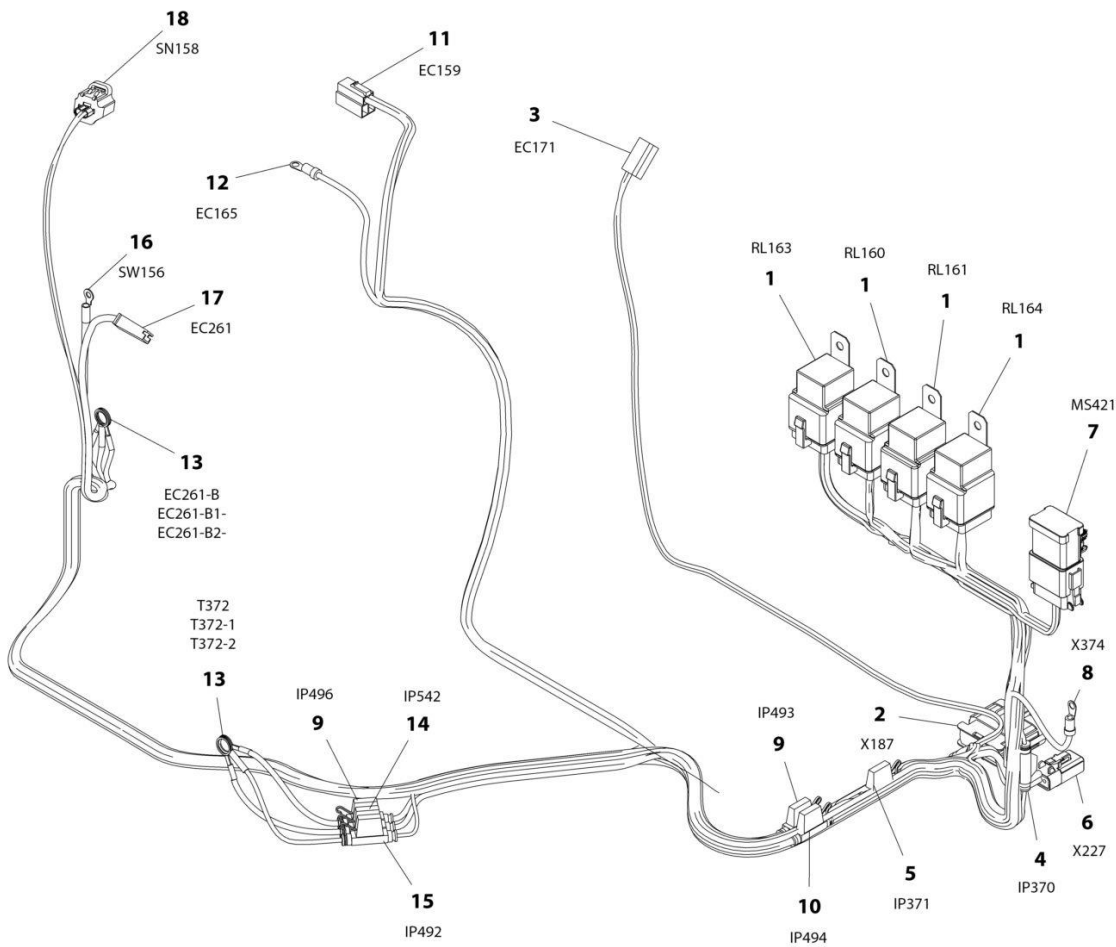

ART_1001177433


SECTION 8 - ELECTRICAL

FIGURE 8-28. ENGINE HARNESS

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001177433	Ref	ENGINE HARNESS	G
1	1001118282	5	Plug, Male - 5 Position	
1	1001116734	6	Terminal, Female	
1	1001116733	2	Terminal, Female	
1	1001116732	8	Terminal, Female	
2	4461109	1	Plug, Male - 16 Position	
2	4461111	9	Pin, Male	
2	4461222	7	Plug, Terminal	
3	1001118744	1	Receptacle, Female - 2 Position	
3	1001116720	2	Terminal	
4	2400060	1	Fuseholder with Cover	
4	See Note	1	Fuse - 10Amp (Note: Not Available Purchase Locally)	
5	2400060	1	Fuseholder with Cover	
5	See Note	1	Fuse - 3Amp (Note: Not Available Purchase Locally)	
6	4461018	2	Connector - 2 Position	
6	4460509	1	Socket, Female	
7	4460836	5	Connector - 12 Position	
7	4460465	7	Socket, Female	
7	4460466	1	Plug, Terminal	
7	4460837	1	Connector, Bussbar	
7	1001121172	1	Bracket, Mounting	
8	4460142	1	Terminal, Ring	
9	2400066	2	Fuseholder with Cover	
9	8229245	2	Fuse 30Amp	
10	2400066	1	Fuseholder with Cover	
10	8229247	1	Fuse 25Amp	
11	1001172074	1	Connector - 3 Position	
11	1001125033	2	Terminal	
11	1001118745	1	Terminal	
12	4460142	1	Terminal, Ring	
13	4460019	6	Terminal, Ring	
14	2400066	1	Fuseholder with Cover	
14	8229246	1	Fuse - 20Amp	
15	2400066	1	Fuseholder with Cover	
15	See Note	1	Fuse - 2Amp	
16	8220007	1	Terminal, Ring	
17	4460260	1	Housing, Terminal	
17	4460259	1	Terminal	
18	1001118657	1	Connector - 2 Position	
18	1001118658	2	Terminal	

SECTION 8 - ELECTRICAL

FIGURE 8-29. GENERATOR HARNESS

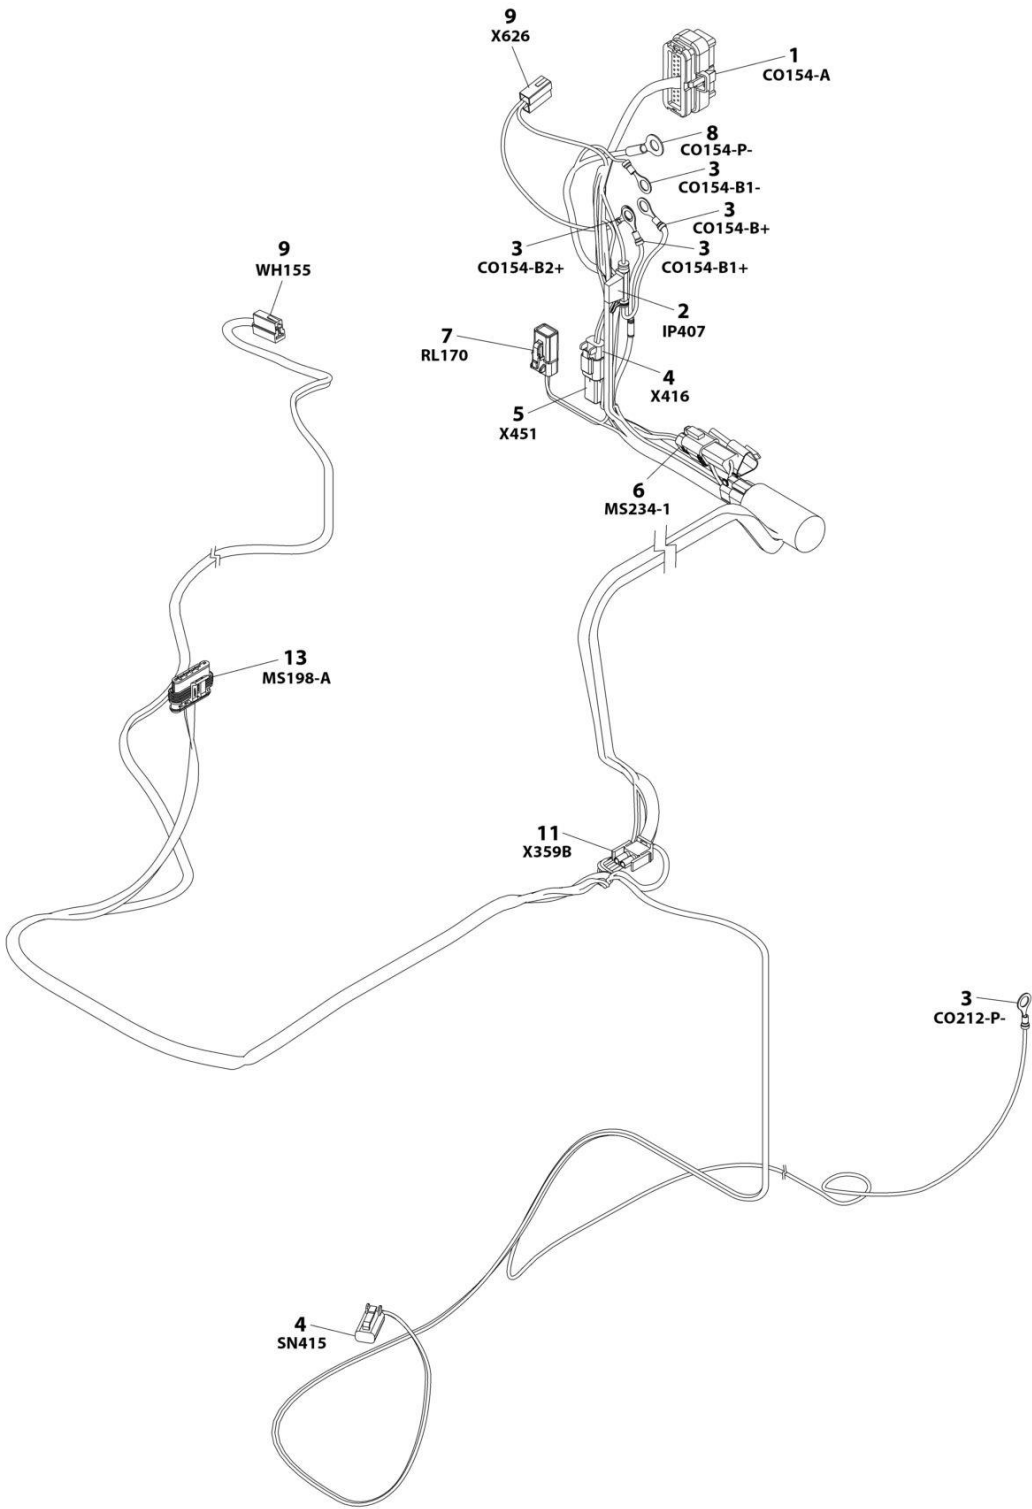

ART_1001177378


SECTION 8 - ELECTRICAL

FIGURE 8-29. GENERATOR HARNESS

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001177378	Ref	GENERATOR HARNESS	I
1	4460873	1	Connector - 35 Position	
1	4460871	12	Socket, Female	
1	4460905	23	Plug, Terminal	
2	2400060	1	Fuseholder	
2	1001170760	1	Fuse 10Amp	
3	4460670	5	Terminal, Ring	
4	4460891	2	Plug, Male - 2 Position	
4	4460465	4	Socket, Female	
5	4460897	1	Receptacle, Female	
5	See Note	1	Resistor 10K Ohm 1/4Watt (Note: Not Available - Purchase Locally)	
5	1001135350	1	Cap, Heat Shrink	
6	1001116812	1	Plug, Male - 3 Position	
6	4460944	3	Socket, Female	
6	1001220644	1	Harness, Jumper	
6	1001186231	1	Connector, Fuse/Resistor	
7	4461290	1	Plug, Male - 2 Position	
7	1001126008	2	Terminal	
8	8220045	1	Terminal, Ring	
9	4460994	2	Receptacle, Female - 2 Position	
9	1001116723	4	Terminal, Female	
11	4460320	1	Plug, Male - 2 Position	
11	4460267	2	Pin, Male	
13	4461117	1	Connector - 6 Position	

SECTION 8 - ELECTRICAL

FIGURE 8-30. GROUND CONTROL HARNESS

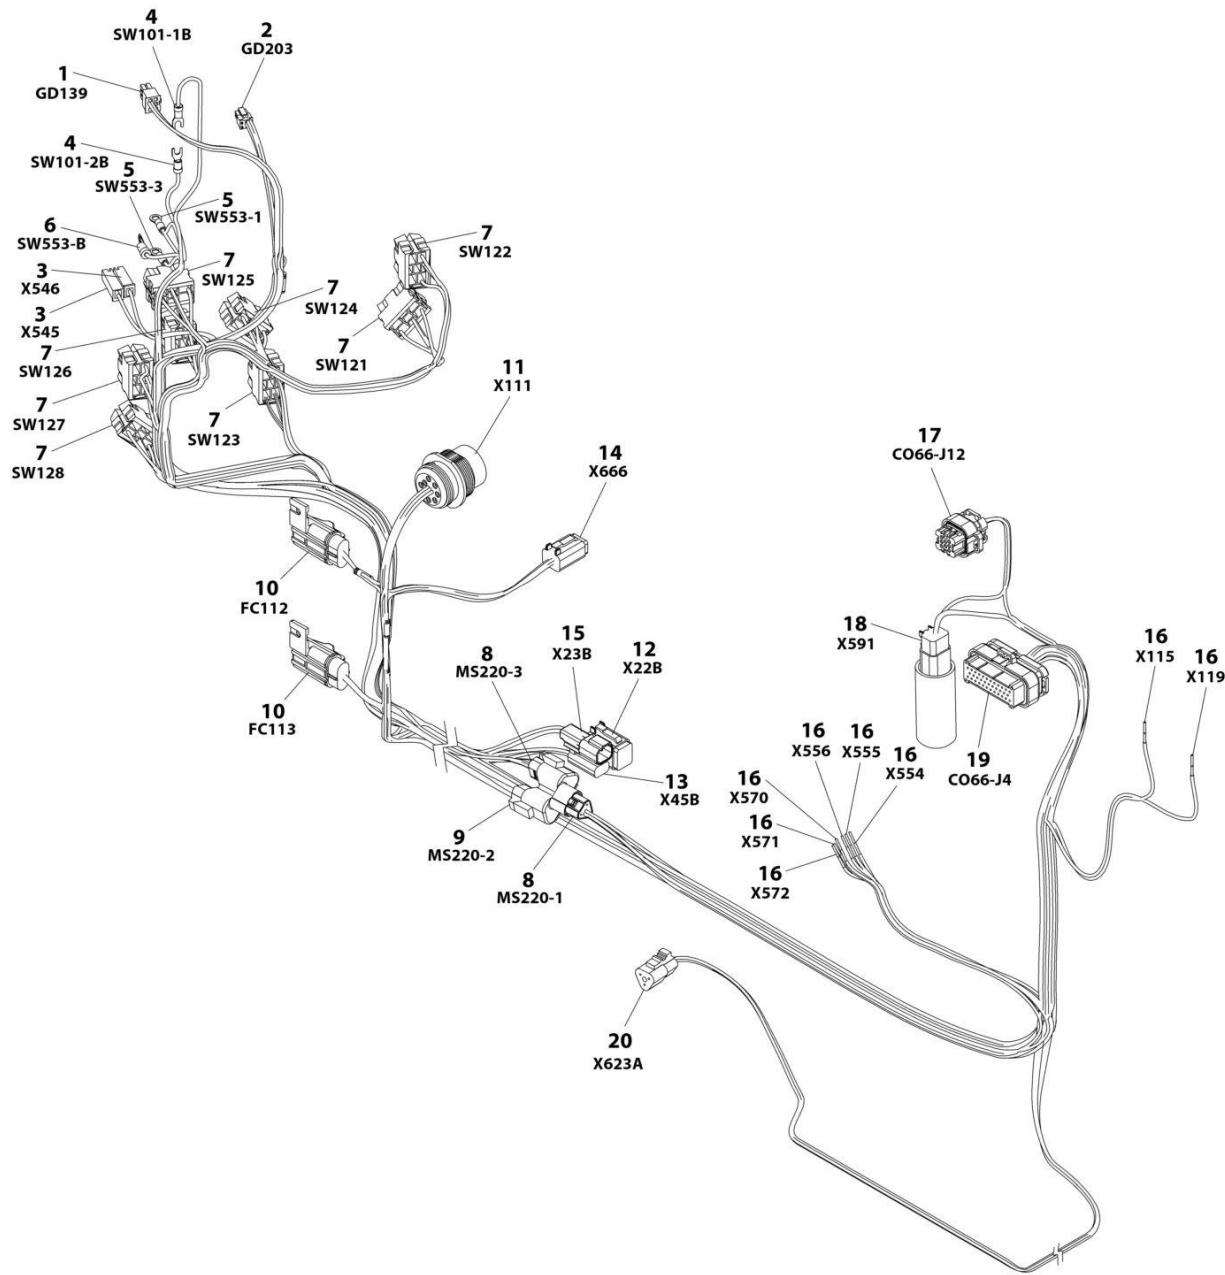

ART_1001246670


SECTION 8 - ELECTRICAL

FIGURE 8-30. GROUND CONTROL HARNESS

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001246670	REF	GROUND CONTROL HARNESS	C
1	4460868	1	Connector - 6 Position	
1	4460877	4	Terminal	
2	1001237667	1	Connector - 6 Position	
2	1001237668	5	Terminal	
3	4460260	2	Housing, Terminal	
3	4460259	2	Terminal	
4	4460115	2	Terminal, Fork	
5	4460313	2	Terminal, Ring	
6	4460042	1	Terminal, Ring	
7	4460418	8	Connector - 3 Position	
7	4460419	31	Terminal	
8	1001116812	2	Plug, Male - 3 Position	
8	4460944	6	Socket, Female	
9	4460539	1	Connector - 3 Position	
9	4460944	2	Socket, Female	
9	4460466	1	Plug, Terminal	
10	1001117078	2	Fuse Assembly (Includes Fuse, Holder, Cover)	
10	See Note	2	Fuse - 5Amp ATO (Note: Not Available - Purchase p/n 1001117078)	
10	4460419	4	Terminal	
11	1001112612	3	Connector - 9 Position	
11	4460464	3	Pin, Male	
11	4460943	3	Pin, Male	
11	4460466	1	Plug, Terminal	
11	4460497	1	Nut	
11	4460496	1	Washer	
12	4460894	1	Connector - 6 Position	
12	4460465	3	Socket, Female	
12	4460466	3	Plug, Terminal	
13	4460891	1	Connector - 2 Position	
13	4460465	2	Socket, Female	
14	4460884	1	Connector - 4 Position	
14	4460465	4	Socket, Female	
15	4460897	1	Connector - 2 Position	
15	4460464	2	Pin, Male	
16	4460465	16	Socket, Female	
17	1001113961	1	Connector - 8 Position	
17	4460905	5	Plug, Terminal	
17	4460871	3	Socket, Female	
18	4460884	1	Connector - 4 Position	
18	4460944	3	Socket, Female	
19	4460876	1	Connector - 35 Position	
19	4460871	19	Socket, Female	
19	4460905	16	Plug, Terminal	
20	4460539	1	Connector - 3 Position	
20	4460944	3	Socket, Female	

SECTION 8 - ELECTRICAL

FIGURE 8-31. GROUND TO PLATFORM CABLE - MAIN BOOM (WITHOUT ARCTIC PACKAGE)

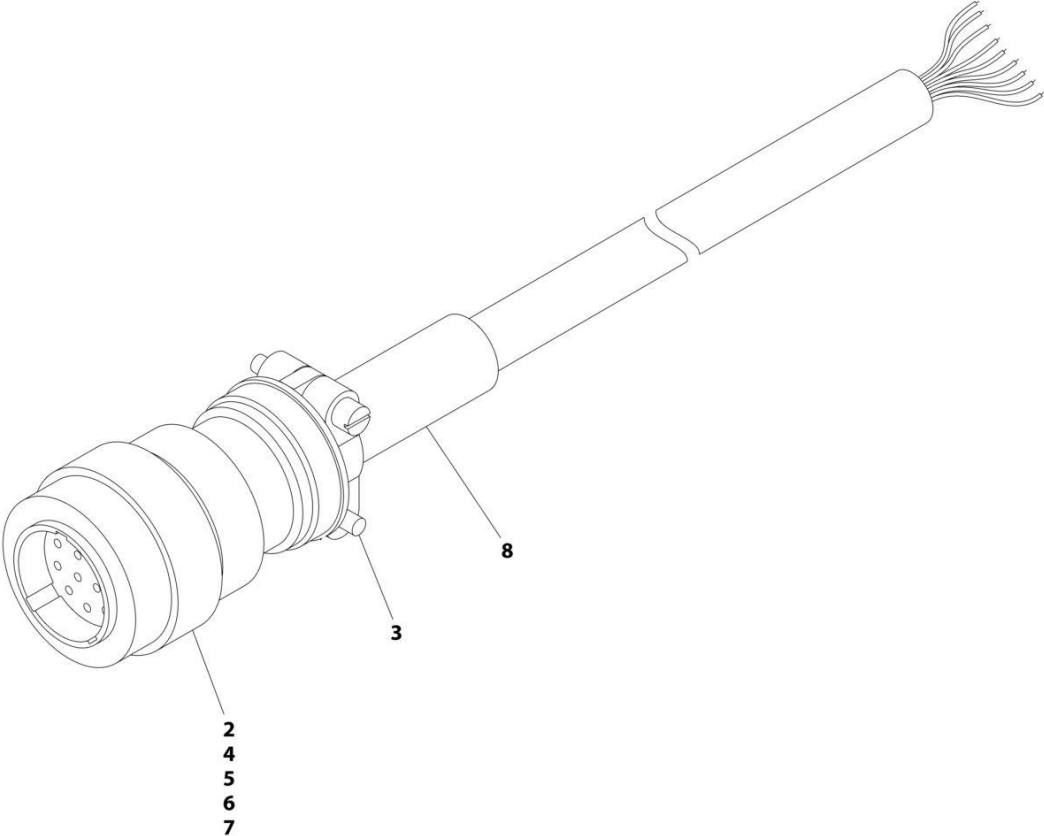

ART_1001119018


SECTION 8 - ELECTRICAL

FIGURE 8-31. GROUND TO PLATFORM CABLE - MAIN BOOM (WITHOUT ARCTIC PACKAGE)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119018	Ref	GROUND TO PLATFORM CABLE - MAIN BOOM (WITHOUT ARCTIC PACKAGE)	C
2	4460865	1	Connector - 19 Position	
3	4460473	1	Clamp, Cable	
4	4460465	22	Socket, Female	
5	4460509	8	Socket, Female	
6	4460466	4	Plug, Terminal	
7	2820118	AR	Heat Shrink	
8	1001226400	1	Heat Shrink	

SECTION 8 - ELECTRICAL

FIGURE 8-32. GROUND TO PLATFORM CABLE - MAIN BOOM (WITH ARCTIC PACKAGE)

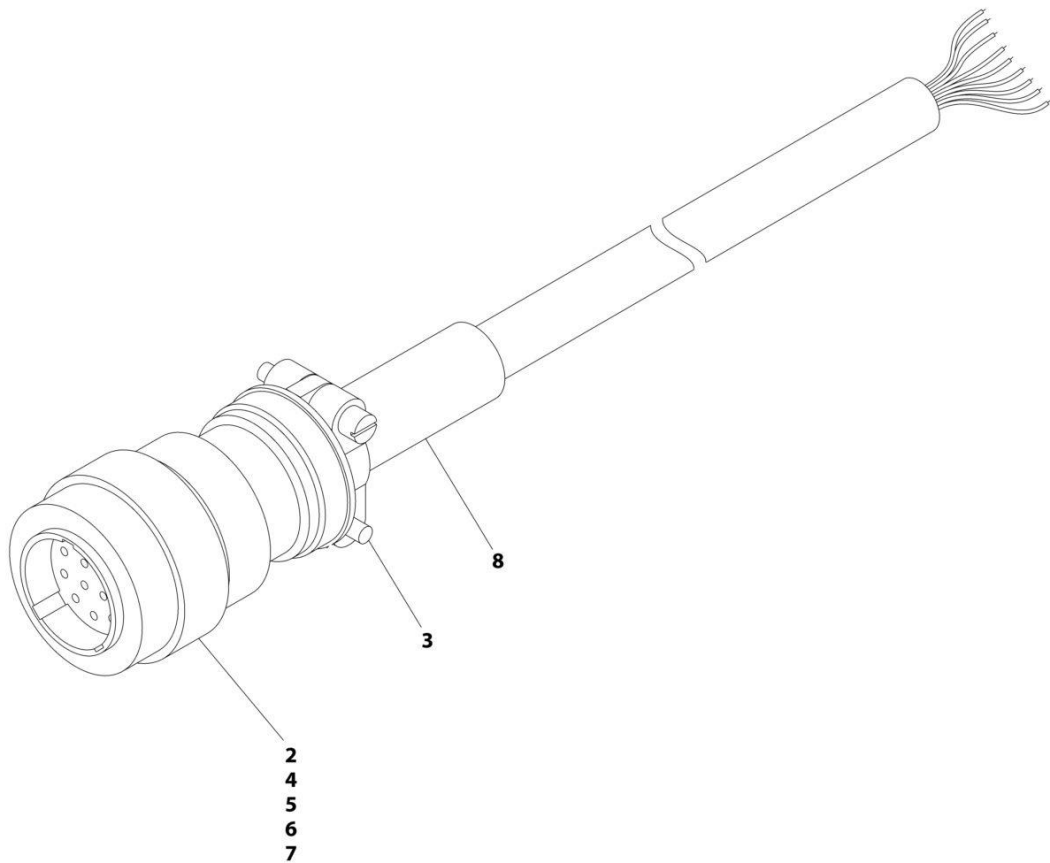

ART_1001119953


SECTION 8 - ELECTRICAL

FIGURE 8-32. GROUND TO PLATFORM CABLE - MAIN BOOM (WITH ARCTIC PACKAGE)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119953	Ref	GROUND TO PLATFORM CABLE - MAIN BOOM (WITH ARCTIC PACKAGE)	D
2	4460865	1	Connector - 19 Position	
3	4460473	1	Clamp, Cable	
4	4460465	22	Socket, Female	
5	4460509	8	Socket, Female	
6	4460466	4	Plug, Terminal	
7	2820118	AR	Heat Shrink	
8	1001226400	1	Heat Shrink	

SECTION 8 - ELECTRICAL

FIGURE 8-33. GROUND TO PLATFORM CABLE - TOWER BOOM (WITHOUT ARCTIC PACKAGE)

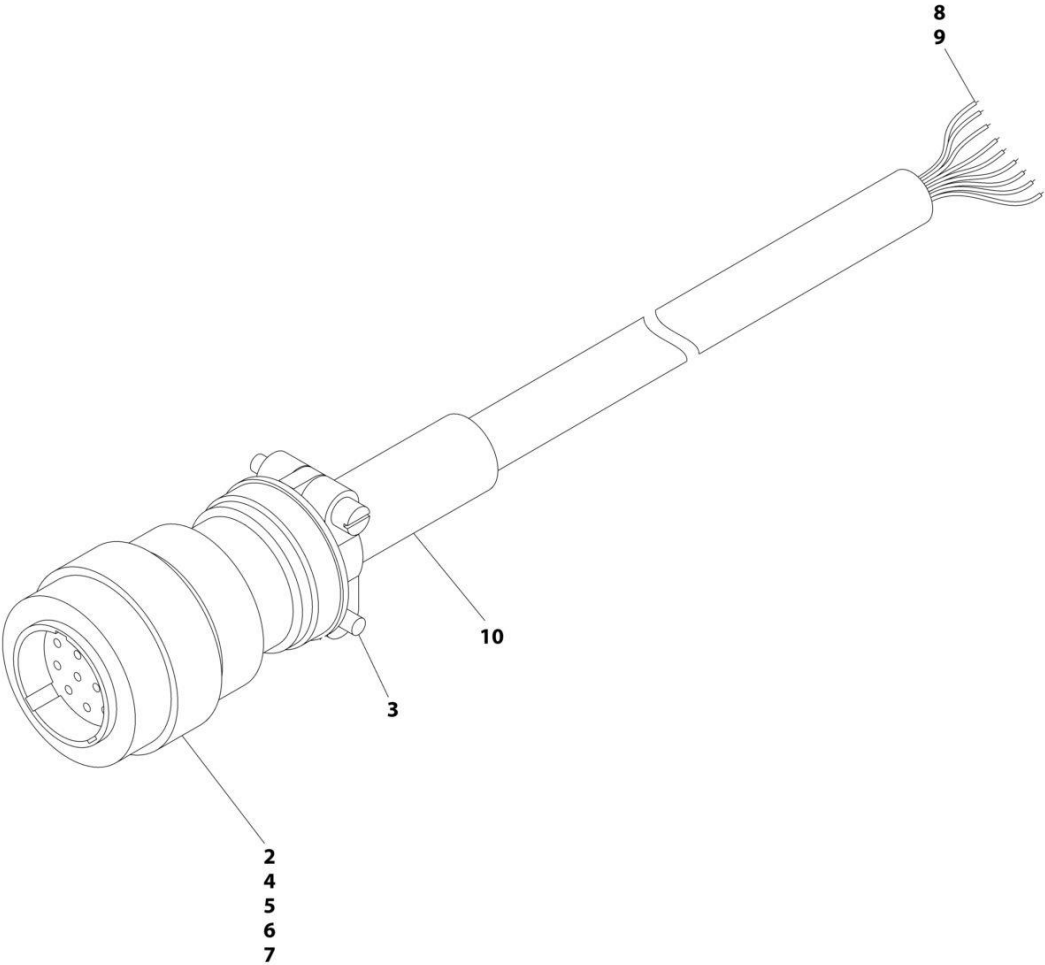

ART_1001119019


SECTION 8 - ELECTRICAL

FIGURE 8-33. GROUND TO PLATFORM CABLE - TOWER BOOM (WITHOUT ARCTIC PACKAGE)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119019	Ref	GROUND TO PLATFORM CABLE - TOWER BOOM (WITHOUT ARCTIC PACKAGE)	B
2	4460865	1	Connector - 19 Position	
3	4460473	1	Clamp, Cable	
4	4460465	11	Socket, Female	
5	4460509	4	Socket, Female	
6	4460466	4	Plug, Terminal	
7	2820118	AR	Heat Shrink	
8	4460464	11	Pin, Male	
9	4460508	4	Pin, Male	
10	1001226400	1	Heat Shrink	

SECTION 8 - ELECTRICAL

FIGURE 8-34. GROUND TO PLATFORM CABLE - TOWER BOOM (WITH ARCTIC PACKAGE)

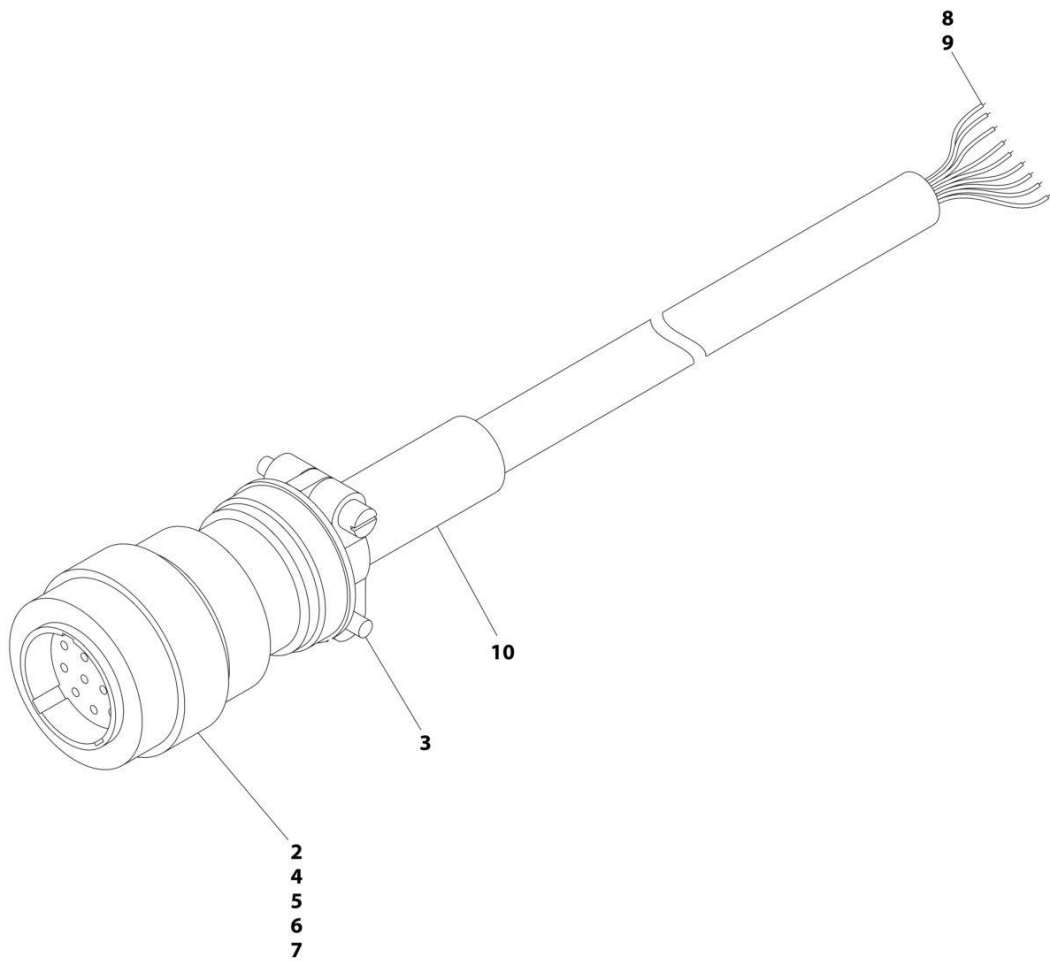

ART_1001119954


SECTION 8 - ELECTRICAL

FIGURE 8-34. GROUND TO PLATFORM CABLE - TOWER BOOM (WITH ARCTIC PACKAGE)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001119954	Ref	GROUND TO PLATFORM CABLE - TOWER BOOM (WITH ARCTIC PACKAGE)	C
2	4460865	1	Connector - 19 Position	
3	4460473	1	Clamp, Cable	
4	4460465	11	Socket, Female	
5	4460509	4	Socket, Female	
6	4460466	4	Plug, Terminal	
7	2820118	AR	Heat Shrink	
8	4460464	11	Pin, Male	
9	4460508	4	Pin, Male	
10	1001226400	1	Heat Shrink	

SECTION 8 - ELECTRICAL

FIGURE 8-35. PLATFORM CONSOLE HARNESS - WITH SKYGUARD

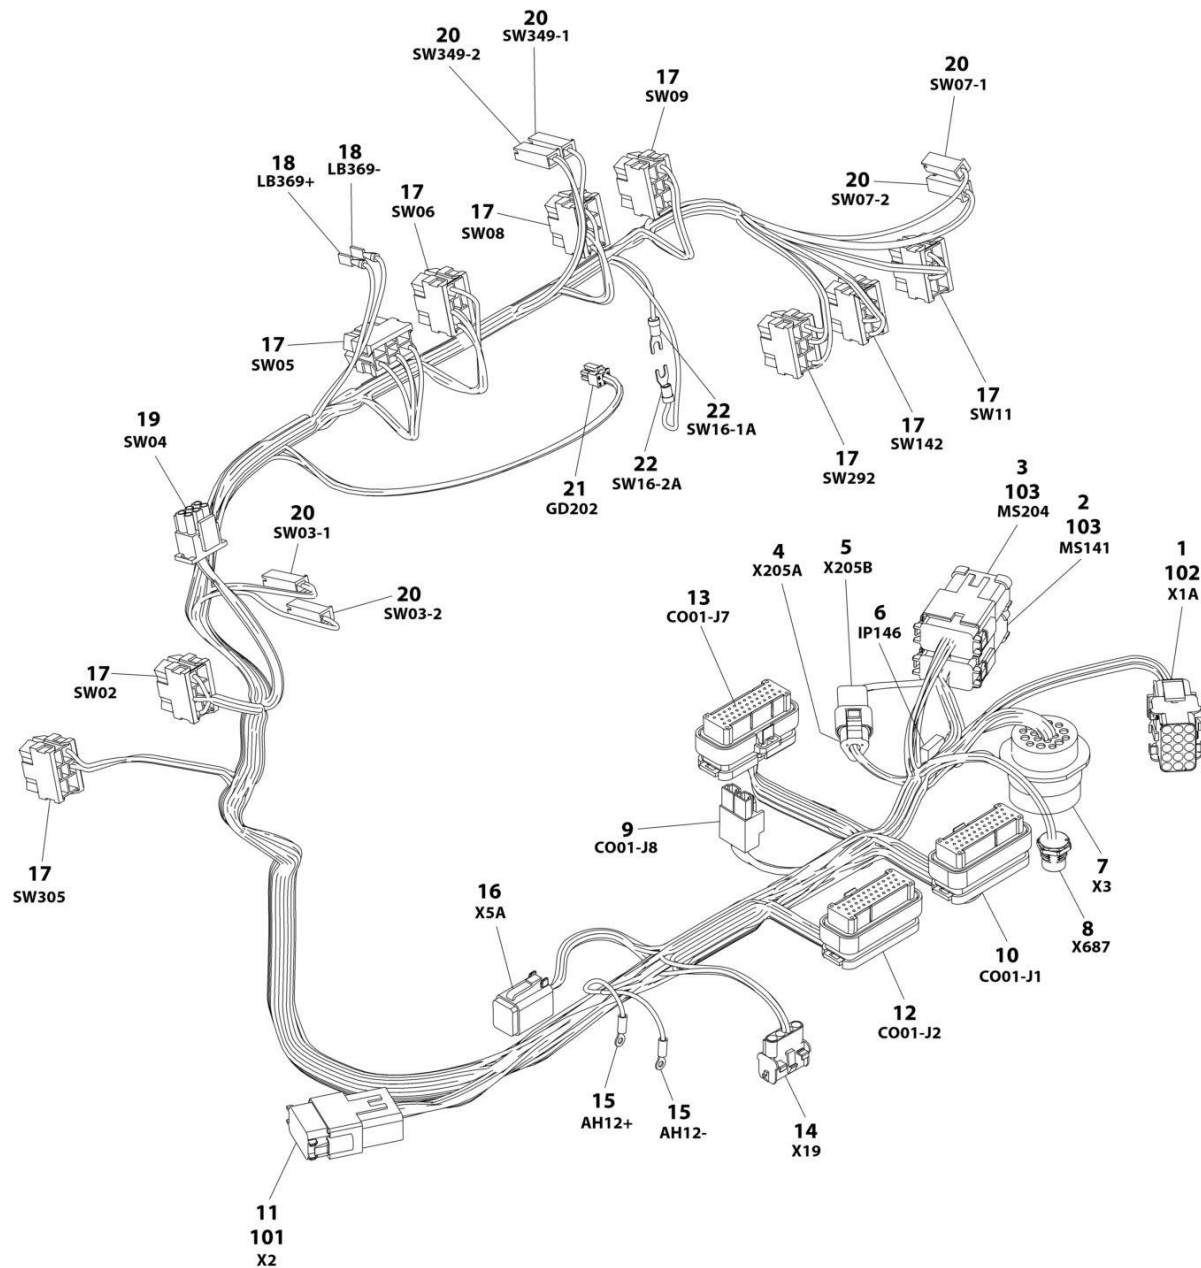

ART_1001245668

SECTION 8 - ELECTRICAL

FIGURE 8-35. PLATFORM CONSOLE HARNESS - WITH SKYGUARD


ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001245668	REF	PLATFORM CONSOLE HARNESS	B
1	4460434	1	Connector - 15 Position	
1	4460267	8	Pin, Male	
2	4460933	1	Connector - 12 Position	
2	4460944	9	Socket, Female	
2	4460466	3	Plug, Terminal	
3	4460933	1	Connector - 12 Position	
3	4460944	11	Socket, Female	
3	4460466	1	Plug, Terminal	
4	4460539	1	Connector - 3 Position	
4	4460465	3	Socket, Female	
5	4460536	1	Connector - 3 Position	
5	4460464	3	Pin, Male	
6	1001170763	1	Fuseholder	
7	4460866	1	Connector - 19 Position	
7	4460943	3	Pin, Male	
7	4460508	2	Pin, Male	
7	4460466	11	Plug, Terminal	
8	1001213447	1	Connector - 5 Position	
9	4460879	1	Connector - 2 Position	
9	4460887	2	Terminal	
10	4460874	1	Connector - 35 Position (Natural)	
10	4460871	24	Socket, Female	
10	4460905	11	Plug, Terminal	
11	4460970	1	Connector - 12 Position	
11	4460464	9	Pin, Male	
11	4460943	3	Pin, Male	
12	4460875	1	Connector - 35 Position (Gray	
12	4460871	12	Socket, Female	
12	4460905	23	Plug, Terminal	
13	4460873	1	Connector - 35 Position (Black)	
13	4460871	21	Socket, Female	
13	4460905	14	Plug, Terminal	
14	4460761	1	Connector - 4 Position	
14	4460227	4	Pin, Male	
15	1001098122	2	Terminal, Ring	
16	4460894	1	Connector - 6 Position	
16	4460465	6	Socket, Female	
17	4460418	9	Connector - 6 Position	
17	4460419	29	Terminal	
18	4460016	2	Terminal	
19	4460225	5	Connector - 6 Position	
19	4460227	6	Pin, Male	
20	4460260	6	Connector - 1 Position	
20	4460259	6	Terminal	
21	1001237667	1	Connector - 6 Position	
21	1001237668	4	Terminal	
22	4460183	2	Terminal, Fork	
101	4460933	1	Connector - 12 Position	
102	4460708	1	Receptacle, Female 15 Position	

SECTION 8 - ELECTRICAL

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
103	1001119020	2	Connector - 12 Position Buss Bar	

SECTION 8 - ELECTRICAL

FIGURE 8-36. PLATFORM INTERFACE HARNESS (PVC 2001)

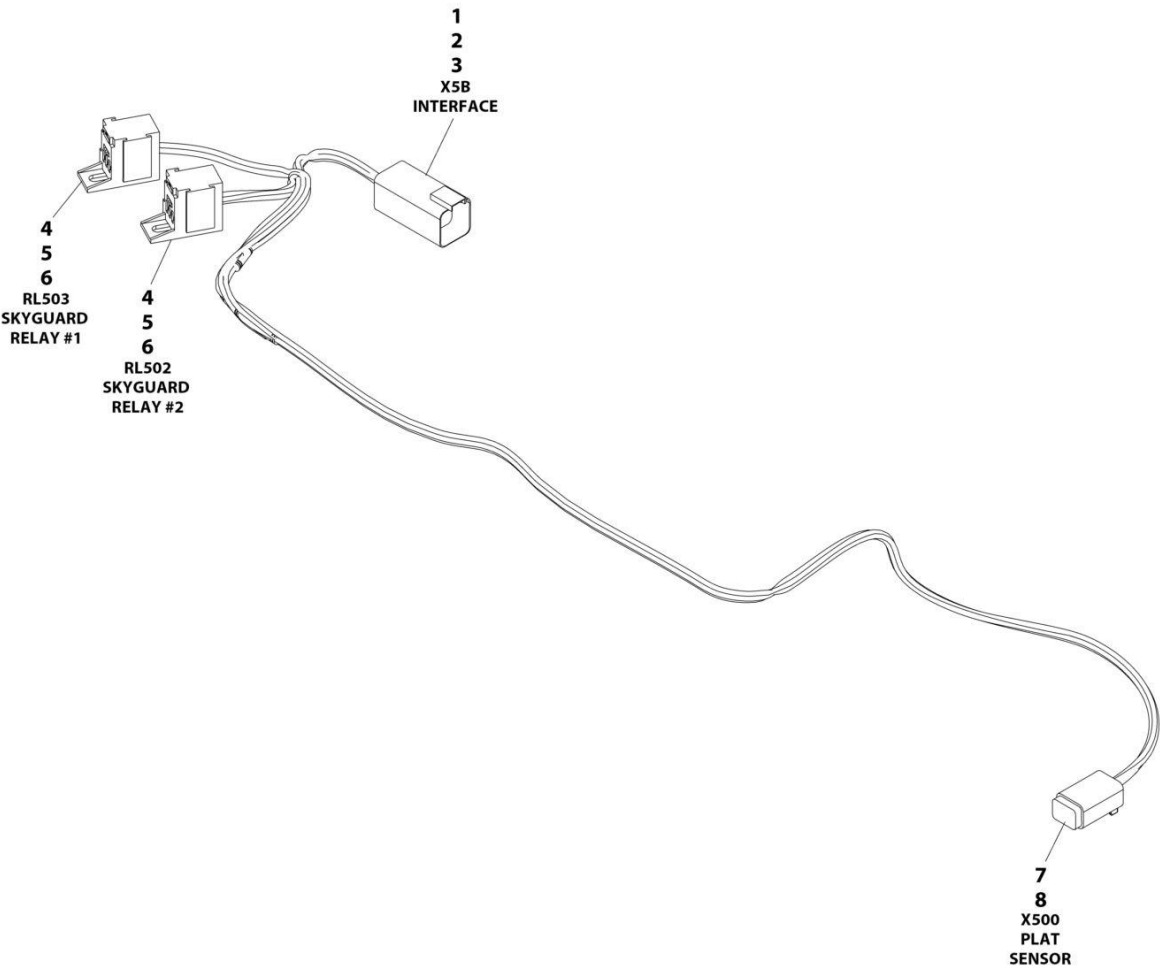

ART_1001225580


SECTION 8 - ELECTRICAL

FIGURE 8-36. PLATFORM INTERFACE HARNESS (PVC 2001)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001225580	Ref	INTERFACE HARNESS - WITH 1 CELL LSS	D
1	4460899	1	Connector	
2	4460464	4	Terminal	
3	4460466	2	Plug	
4	1001186432	2	Connector	
5	1001116720	4	Terminal	
6	1001118388	4	Terminal	
7	4460884	1	Connector	
8	4460465	4	Terminal	

SECTION 8 - ELECTRICAL

FIGURE 8-37. PLATFORM INTERFACE HARNESS (PVC 2007)

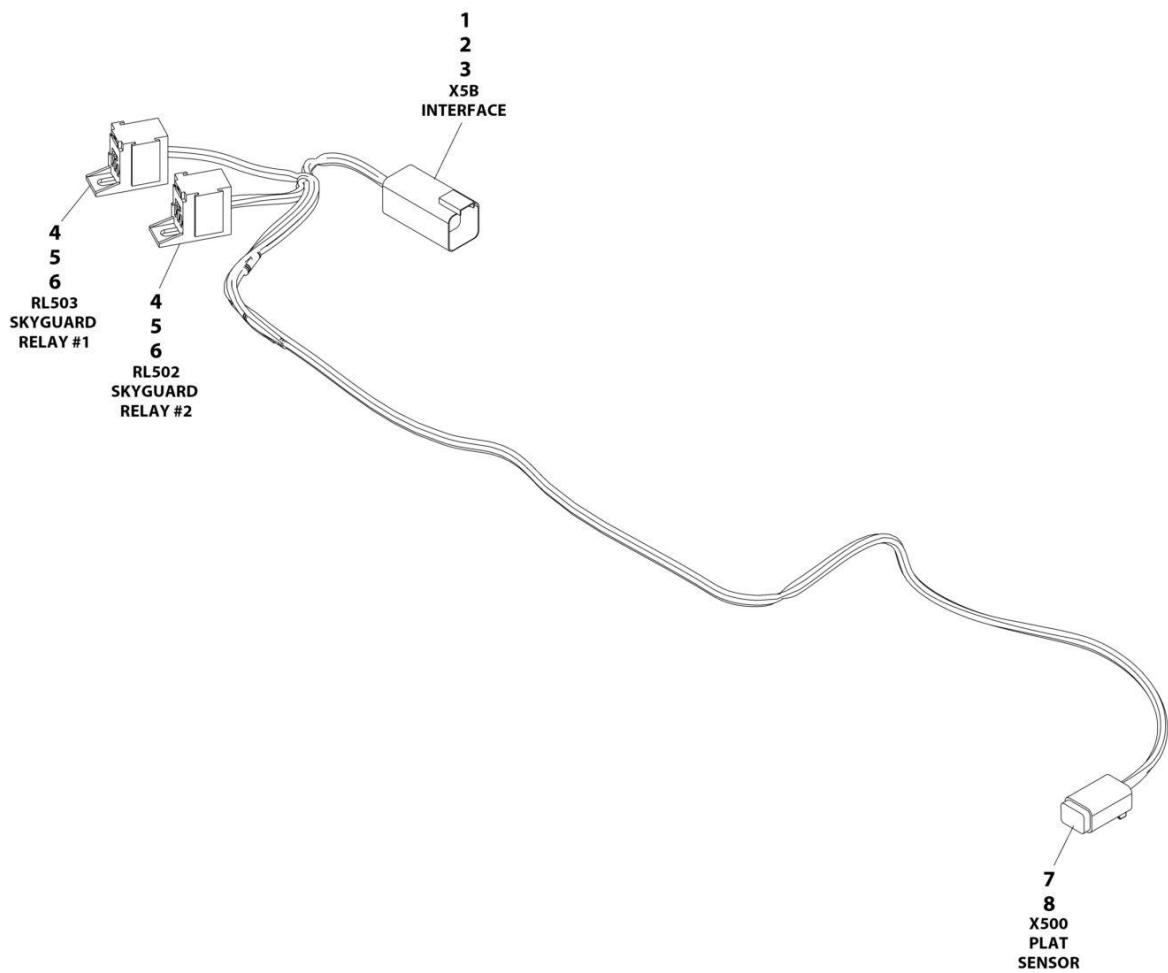

ART_1001225580_E


SECTION 8 - ELECTRICAL

FIGURE 8-37. PLATFORM INTERFACE HARNESS (PVC 2007)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001225580	Ref	PLATFORM INTERFACE HARNESS - WITH 1 CELL LSS	E
1	4460899	1	Connector	
2	4460464	4	Terminal	
3	4460466	2	Plug	
4	1001186432	2	Connector	
5	1001253375	4	Terminal	
6	1001104519	4	Terminal	
7	4460884	1	Connector	
8	4460465	4	Terminal	

SECTION 8 - ELECTRICAL

FIGURE 8-38. PLATFORM TO BOOM VALVE HARNESS

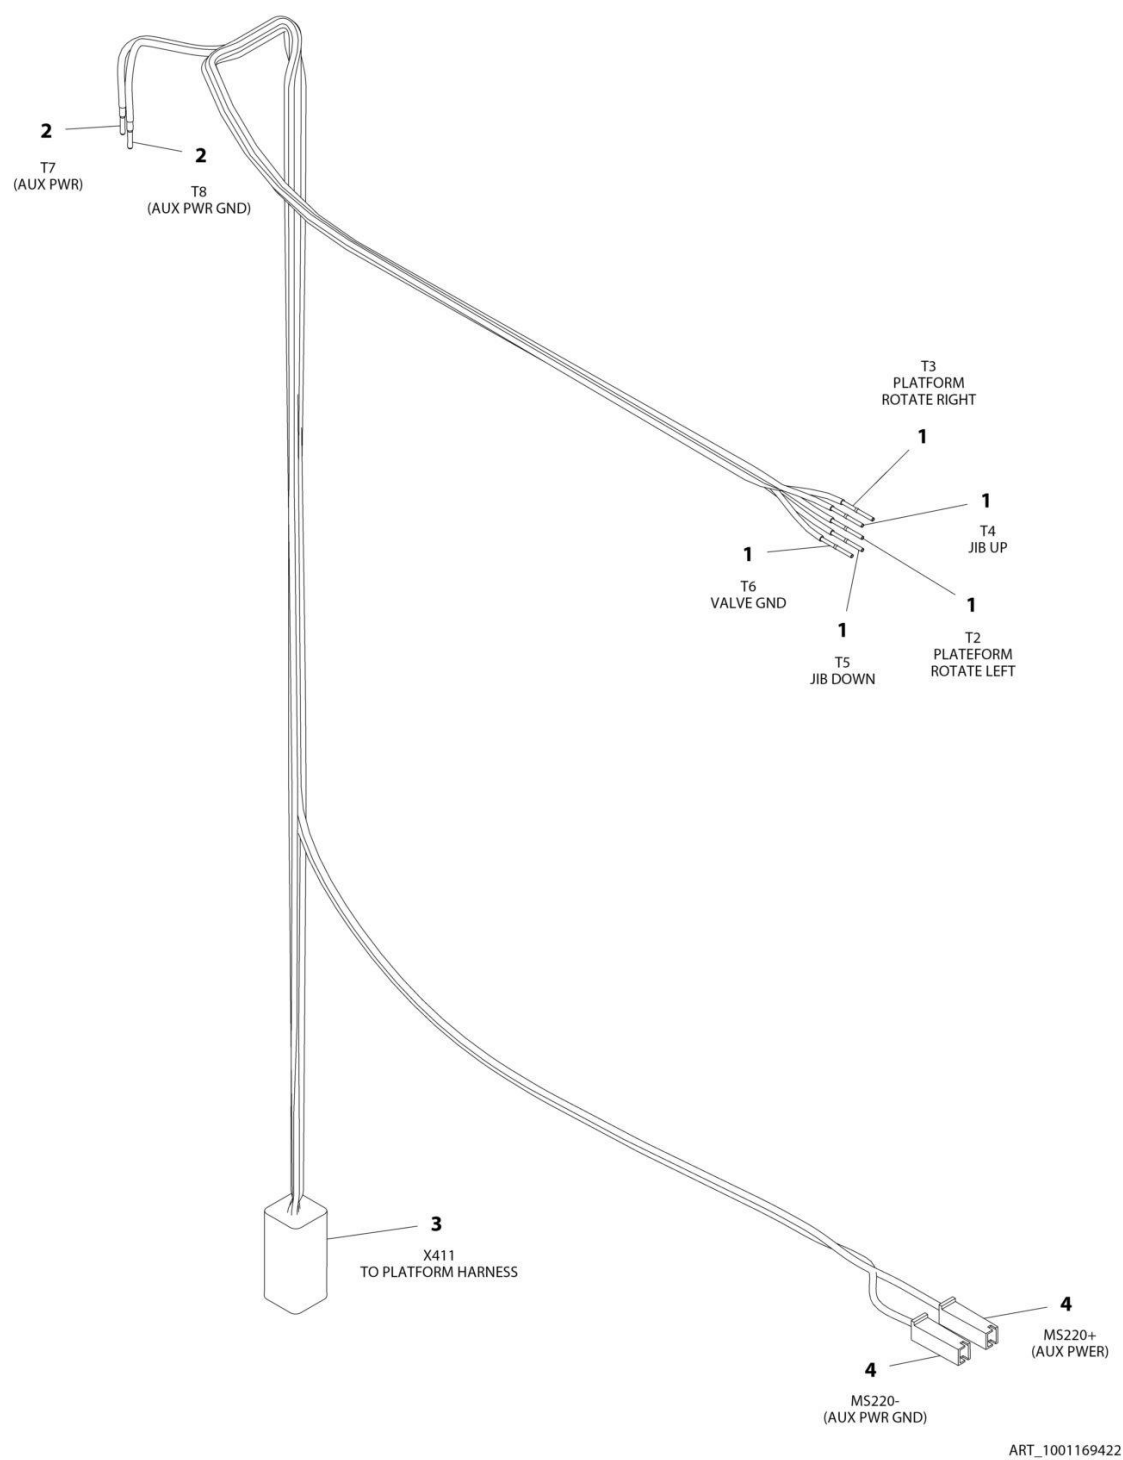


SECTION 8 - ELECTRICAL

FIGURE 8-38. PLATFORM TO BOOM VALVE HARNESS

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001169422	Ref	PLATFORM TO BOOM HARNESS	A
1	4460465	5	Socket, Female	
2	4460508	2	Pin, Male	
3	4460899	1	Connector - 6 Position	
3	4460464	5	Pin, Male	
3	4460466	1	Plug, Terminal	
4	4460260	2	Connector - 1 Position	
4	4460259	2	Terminal	

SECTION 8 - ELECTRICAL

FIGURE 8-39. AC BOX AT PLATFORM INSTALLATION - 110V IEC YELLOW (CE SPEC)

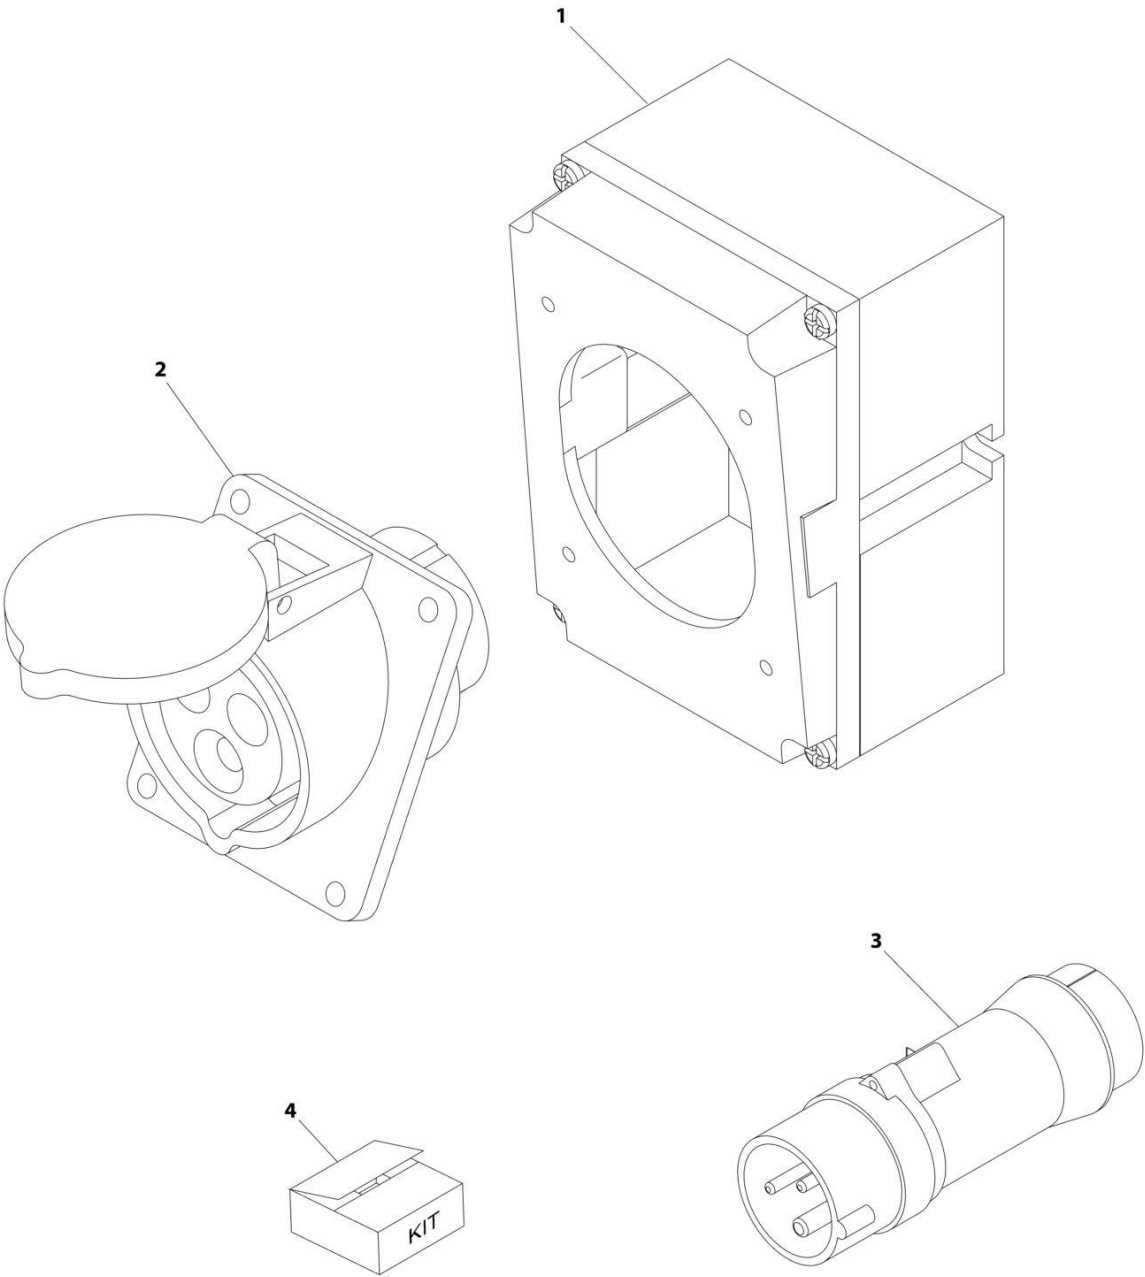

ART_0275216


SECTION 8 - ELECTRICAL

FIGURE 8-39. AC BOX AT PLATFORM INSTALLATION - 110V IEC YELLOW (CE SPEC)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	0275216	Ref	RECEPTACLE BOX KIT - 110V IEC YELLOW	B
1	0861781	1	Box, Switch	
2	4461198	1	Receptacle	
3	4461196	1	Plug, Male	
4	1001100341	1	Plug and Socket Kit (Includes Items 1-3 and Female Plug p/n 4461197)	

SECTION 8 - ELECTRICAL

FIGURE 8-40. RECEPTACLE BOX KIT - 220V IEC BLUE (CE SPEC)

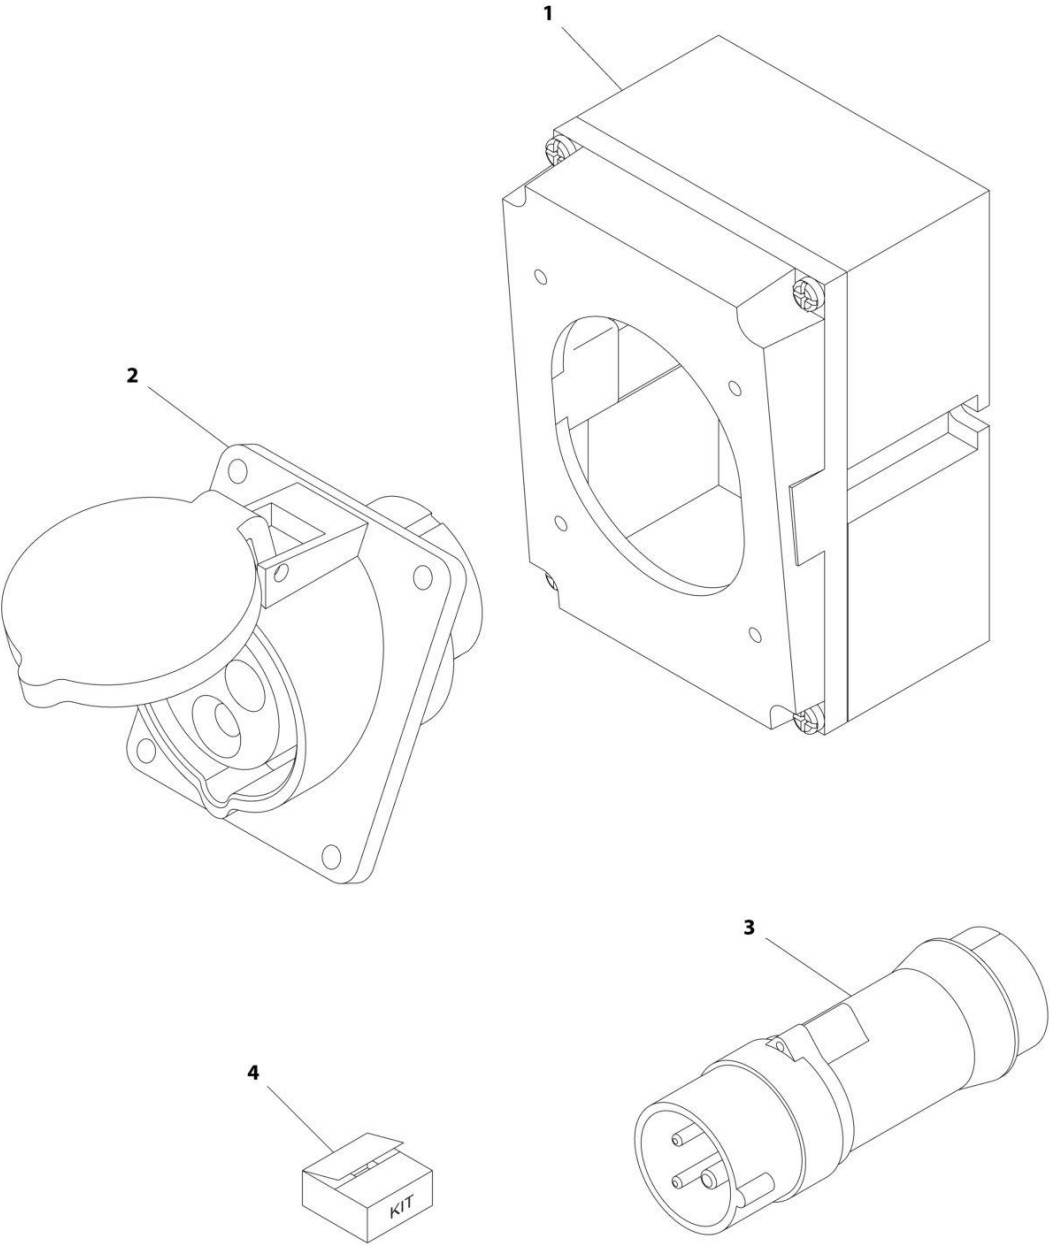

ART_0275217


SECTION 8 - ELECTRICAL

FIGURE 8-40. RECEPTACLE BOX KIT - 220V IEC BLUE (CE SPEC)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	0275217	Ref	RECEPTACLE BOX KIT - 220V IEC BLUE	B
1	0861781	1	Box, Switch	
2	4461201	1	Receptacle	
3	4461199	1	Plug, Male	
4	1001100342	1	Plug and Socket Kit (Includes Items 1-3 and Female Plug p/n 4461200)	

SECTION 8 - ELECTRICAL

FIGURE 8-41. RECEPTACLE BOX KIT - 220V CEE7 POST GROUND 70MM X 70MM BOX (CE SPEC)

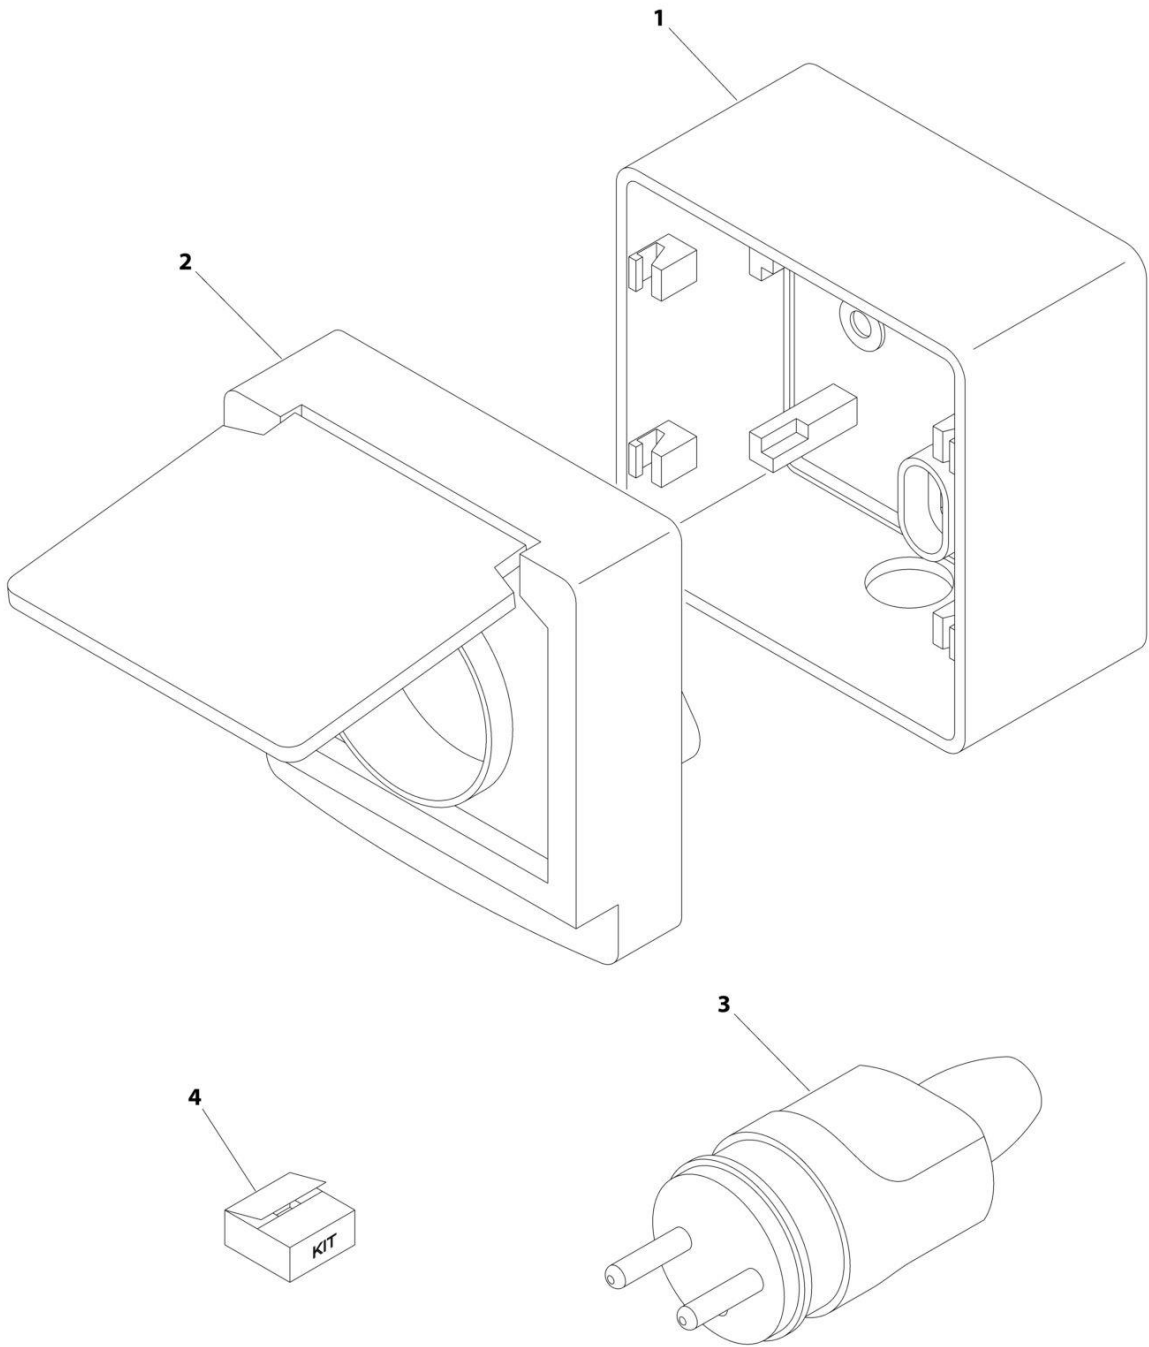

ART_0275218_C


SECTION 8 - ELECTRICAL

FIGURE 8-41. RECEPTACLE BOX KIT - 220V CEE7 POST GROUND 70MM X 70MM BOX (CE SPEC)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	0275218	Ref	RECEPTACLE BOX KIT - 220V CEE7 POST GROUND 70MM X 70MM BOX	C
1	1001141967	1	Box, Switch	
2	1001141968	1	Receptacle	
3	4461205	1	Plug, Male	
4	1001141971	1	Plug and Socket Kit (Includes Items 1-3 and Female Plug p/n 4461206)	

SECTION 8 - ELECTRICAL

FIGURE 8-42. RECEPTACLE BOXKIT - 220V CEE7 SIDE GROUND 70MM X 70MM BOX (CE SPEC)

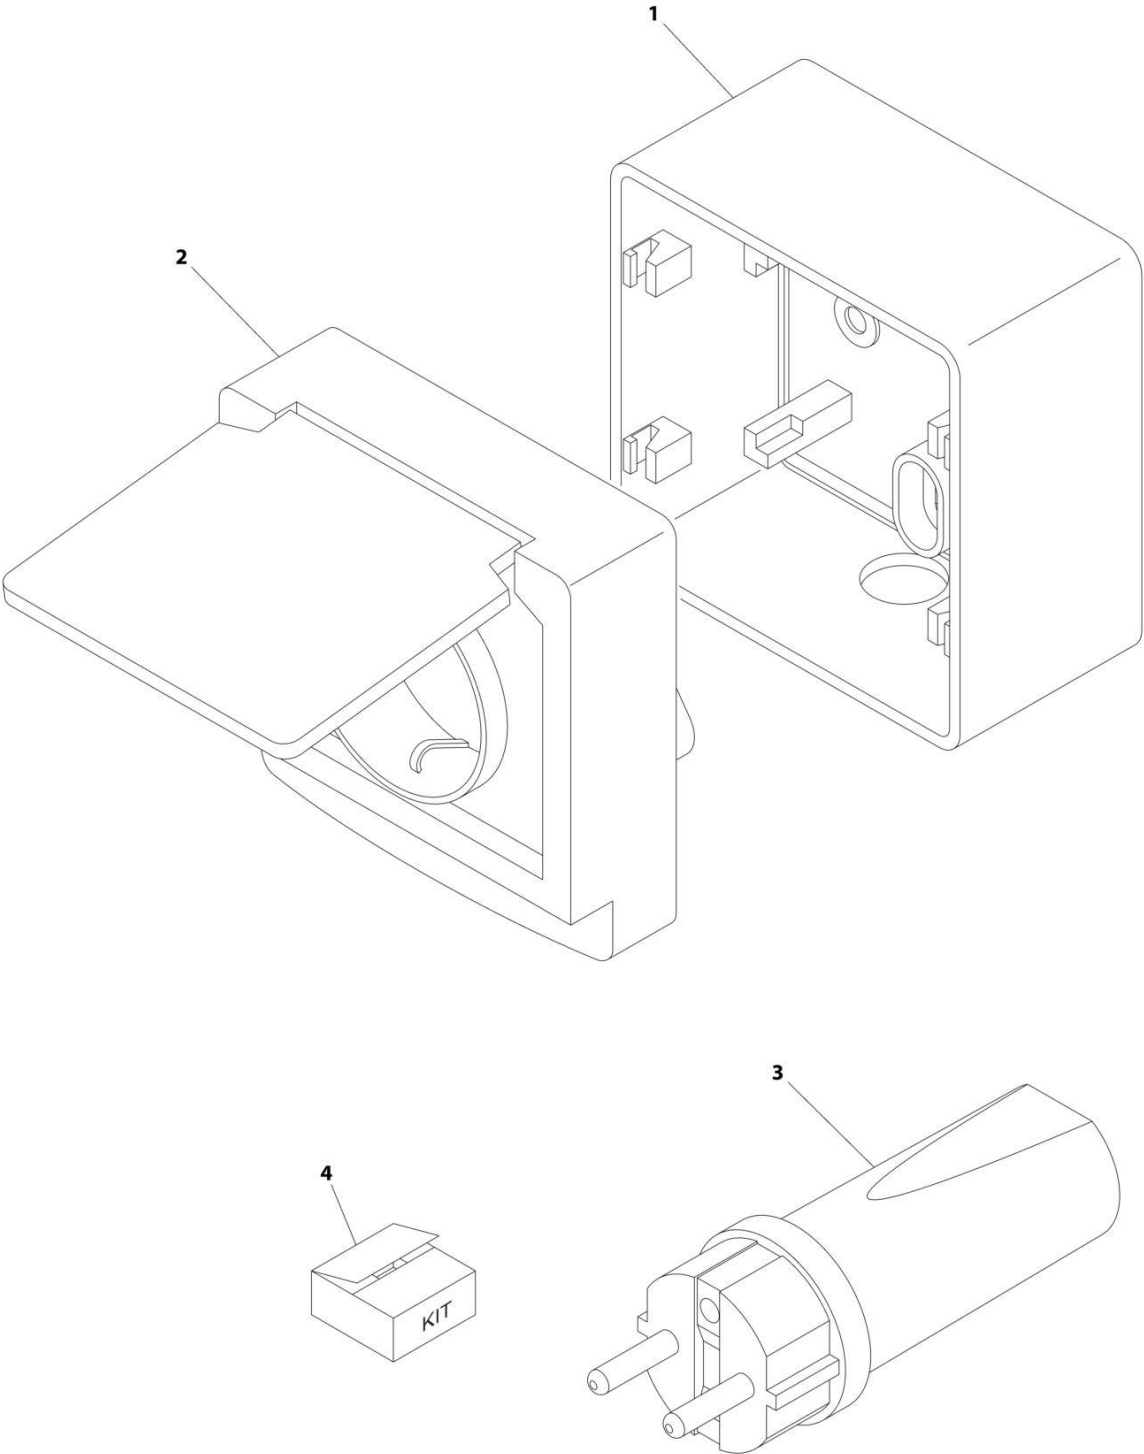

ART_0275219


SECTION 8 - ELECTRICAL

FIGURE 8-42. RECEPTACLE BOX KIT - 220V CEE7 SIDE GROUND 70MM X 70MM BOX (CE SPEC)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	0275219	Ref	RECEPTACLE BOX KIT - 220V CEE7 SIDE GROUND 70MM X 70MM BOX	B
1	1001141967	1	Box, Switch	
2	1001141969	1	Receptacle	
3	4461205	1	Plug, Male	
4	1001141970	1	Plug and Socket Kit (Includes Items 1-3 and Female Plug p/n 4461206)	

SECTION 8 - ELECTRICAL

FIGURE 8-43. RECEPTACLE BOXKIT - 220V CEE7 POST GROUND 2IN X 4IN BOX (CE SPEC)

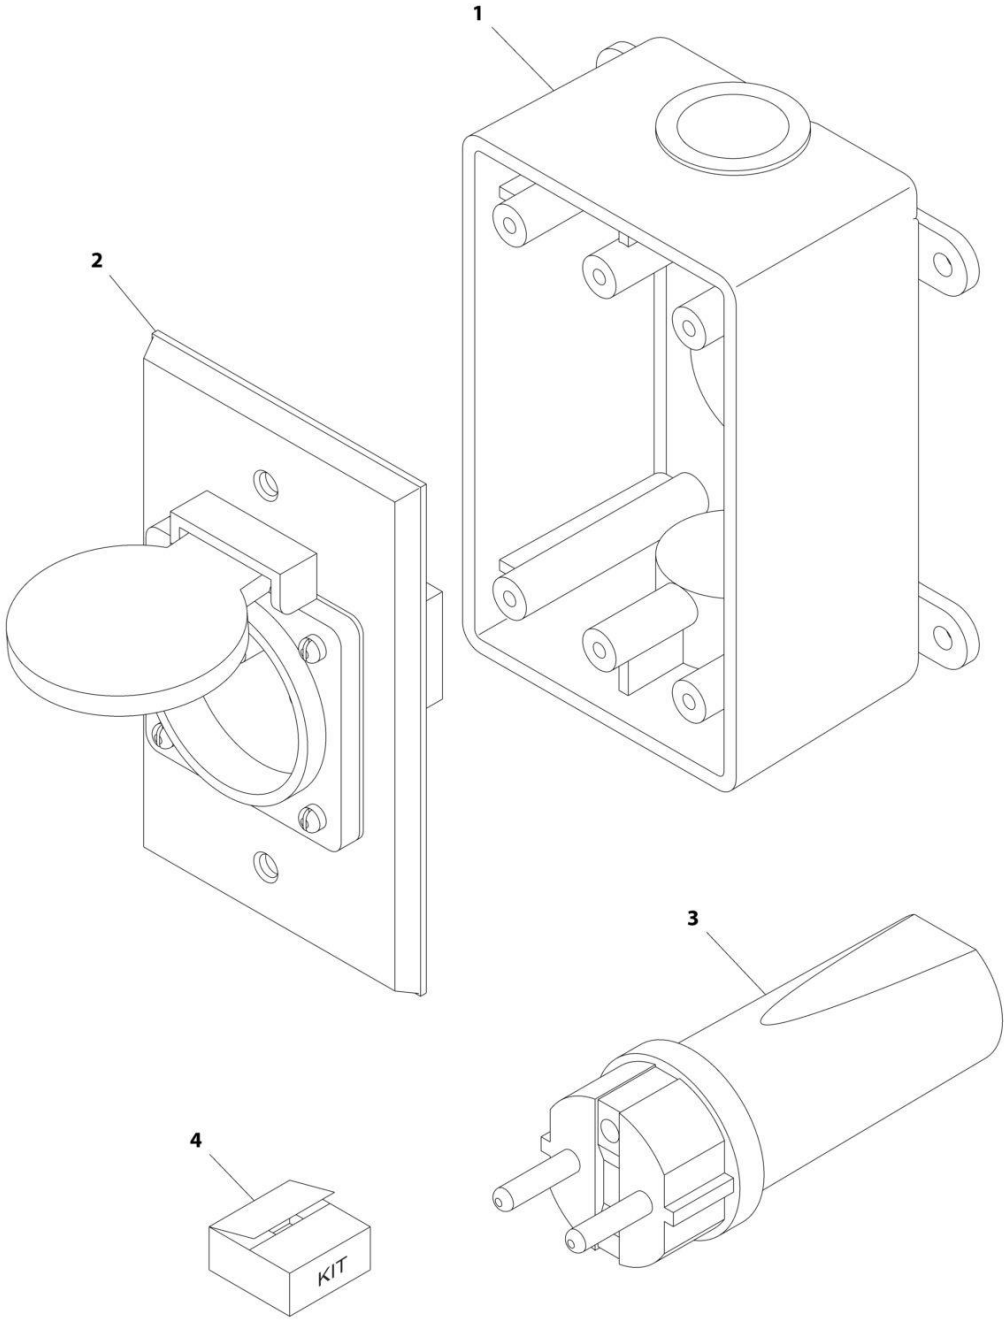

ART_0275452


SECTION 8 - ELECTRICAL

FIGURE 8-43. RECEPTACLE BOX KIT - 220V CEE7 POST GROUND 2IN X 4IN BOX (CE SPEC)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	0275452	Ref	RECEPTACLE BOX KIT - 220V CEE7 POST GROUND	C
1	0861731	1	Box, Switch	
2	4461244	1	Receptacle	
3	4461205	1	Plug, Male	
4	1001100345	1	Plug and Socket Kit (Includes Items 1-3 and Female Plug p/n 4461206)	

SECTION 8 - ELECTRICAL

FIGURE 8-44. RECEPTACLE BOX KIT - 220V CEE7 SIDE GROUND 2IN X 4IN BOX (CE SPEC)

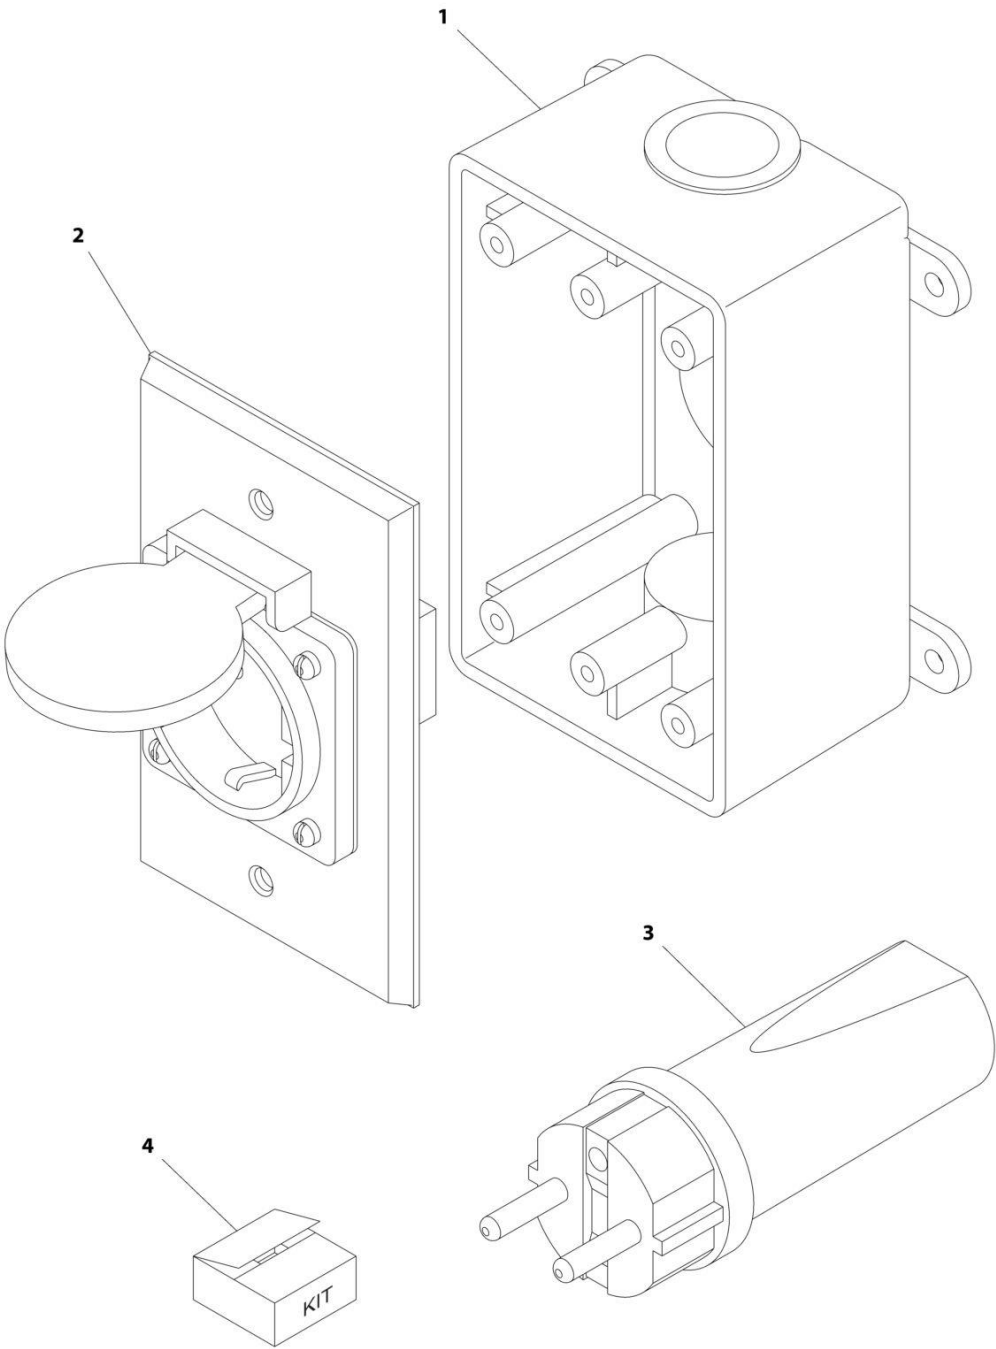

ART_0275453


SECTION 8 - ELECTRICAL

FIGURE 8-44. RECEPTACLE BOX KIT - 220V CEE7 SIDE GROUND 2IN X 4IN BOX (CE SPEC)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	0275453	Ref	RECEPTACLE BOX KIT - 220V CEE7 SIDE GROUND	B
1	0861731	1	Box, Switch	
2	4461245	1	Receptacle	
3	4461205	1	Plug, Male	
4	1001100347	1	Plug and Socket Kit (Includes Items 1-3 and Female Plug p/n 4461206)	

SECTION 8 - ELECTRICAL

FIGURE 8-45. RECEPTACLE BOXKIT - 220V AFSINT 107 (CE SPEC)

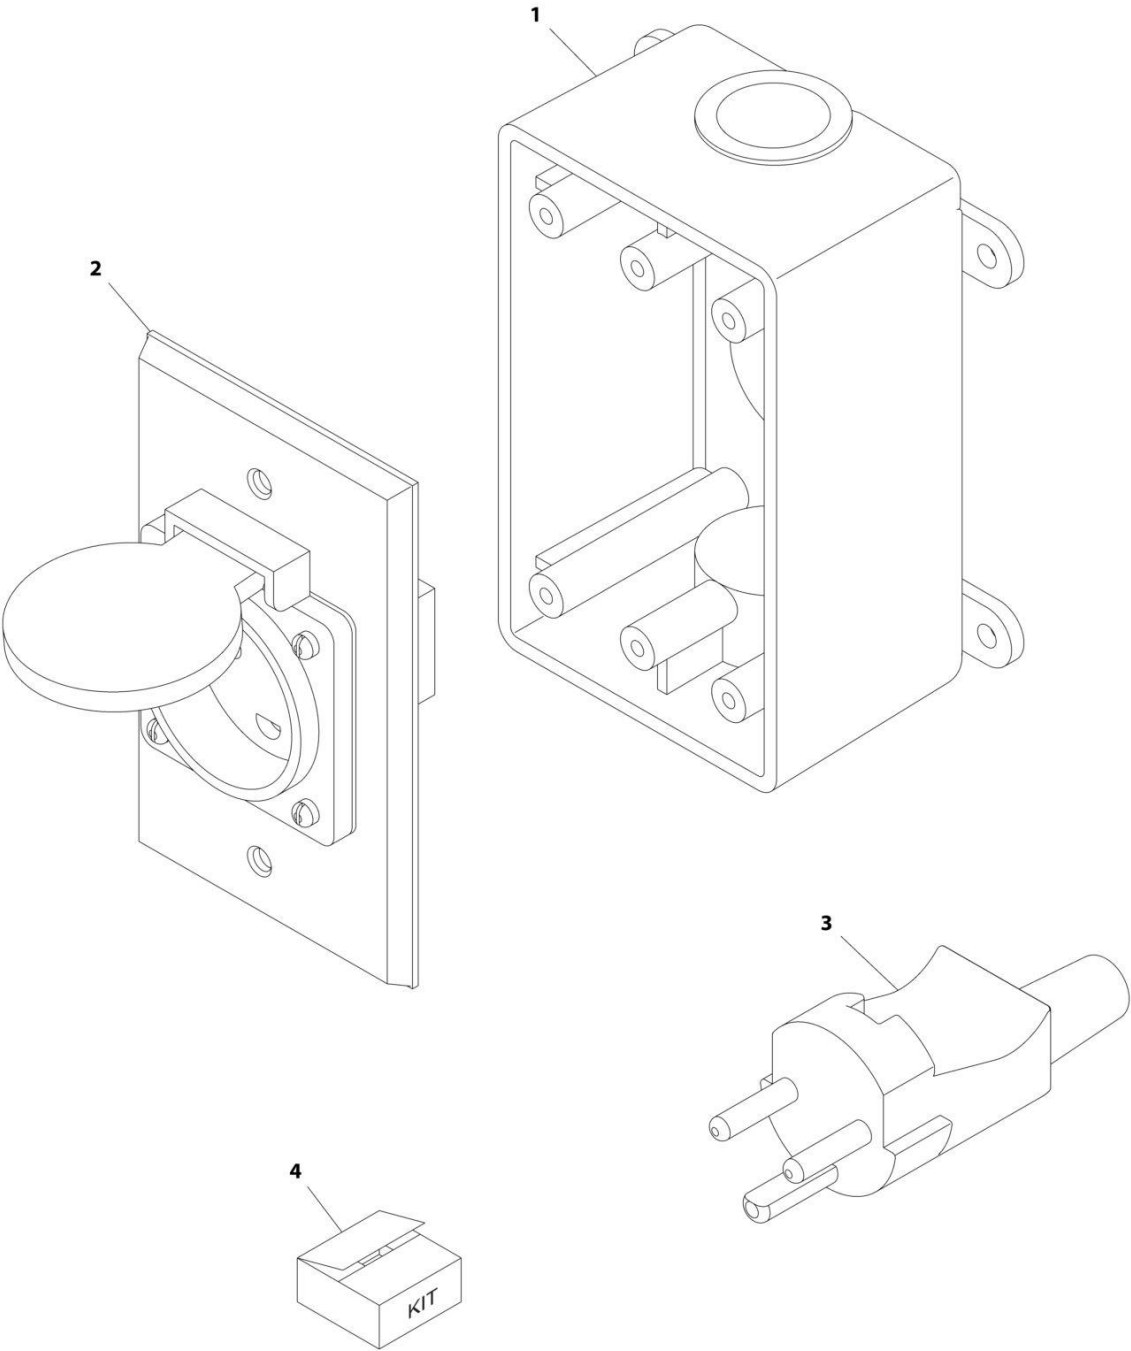

ART_0275454


SECTION 8 - ELECTRICAL

FIGURE 8-45. RECEPTACLE BOX KIT - 220V AFSINT 107 (CE SPEC)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	0275454	Ref	RECEPTACLE BOX KIT - 220V AFSINT 107	B
1	0861731	1	Box, Switch	
2	4461246	1	Receptacle	
3	4461249	1	Plug, Male	
4	1001100346	1	Plug and Socket Kit (Includes Items 1-3 and Female Plug p/n 4461250)	

SECTION 8 - ELECTRICAL

FIGURE 8-46. SKYLINE HARNESS

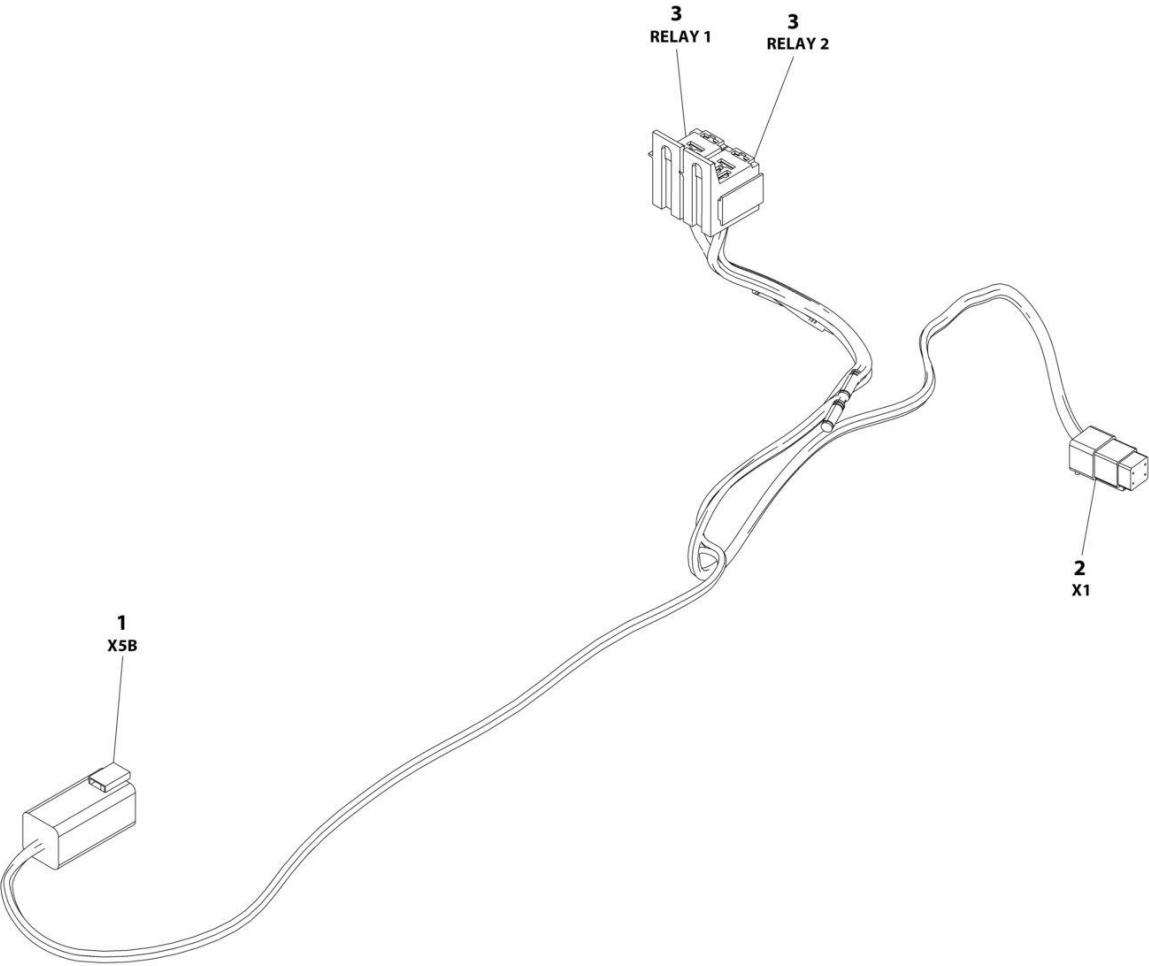

ART_1001238418


SECTION 8 - ELECTRICAL

FIGURE 8-46. SKYLINE HARNESS

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001238418	Ref	SKYLINE HARNESS	B
1	4460899	1	Connector - 6 Position	
1	4460464	4	Pin, Male	
1	4460466	2	Plug, Terminal	
2	4461077	1	Connector - 4 Position	
2	1001126009	4	Socket, Female	
3	1001186432	2	Plug, Relay	
3	1001118388	5	Terminal	
3	1001118384	3	Terminal	
3	3740086	2	Relay	

SECTION 8 - ELECTRICAL

FIGURE 8-47. SKYEYE INTERMEDIATE HARNESS

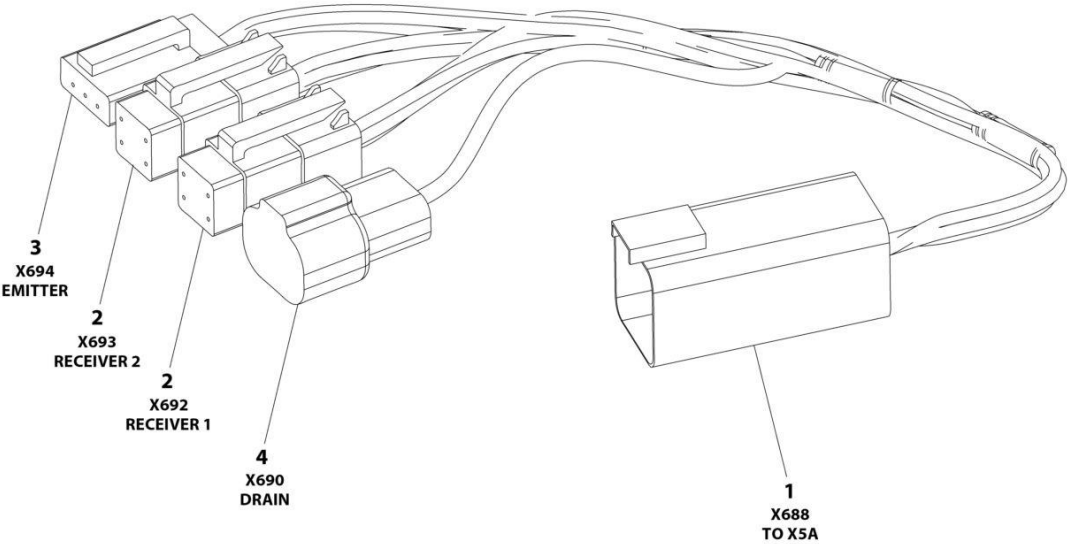

ART_1001237865


SECTION 8 - ELECTRICAL

FIGURE 8-47. SKYEYE INTERMEDIATE HARNESS

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001237865	Ref	SKYEYE INTERMEDIATE HARNESS	A
1	4460899	1	Connector - 6 Position	
1	4460943	4	Pin, Male	
1	4460466	2	Plug, Terminal	
2	4461077	2	Connector - 4 Position	
2	1001119619	8	Socket, Female	
3	4460911	1	Connector - 3 Position	
3	1001119619	3	Socket, Female	
4	1001187681	1	Connector - 2 Position	
4	4460941	1	Pin, Male	
4	4460466	1	Plug, Terminal	

SECTION 8 - ELECTRICAL

FIGURE 8-48. SKYEYE RECEIVER HARNESS (PVC 2001)

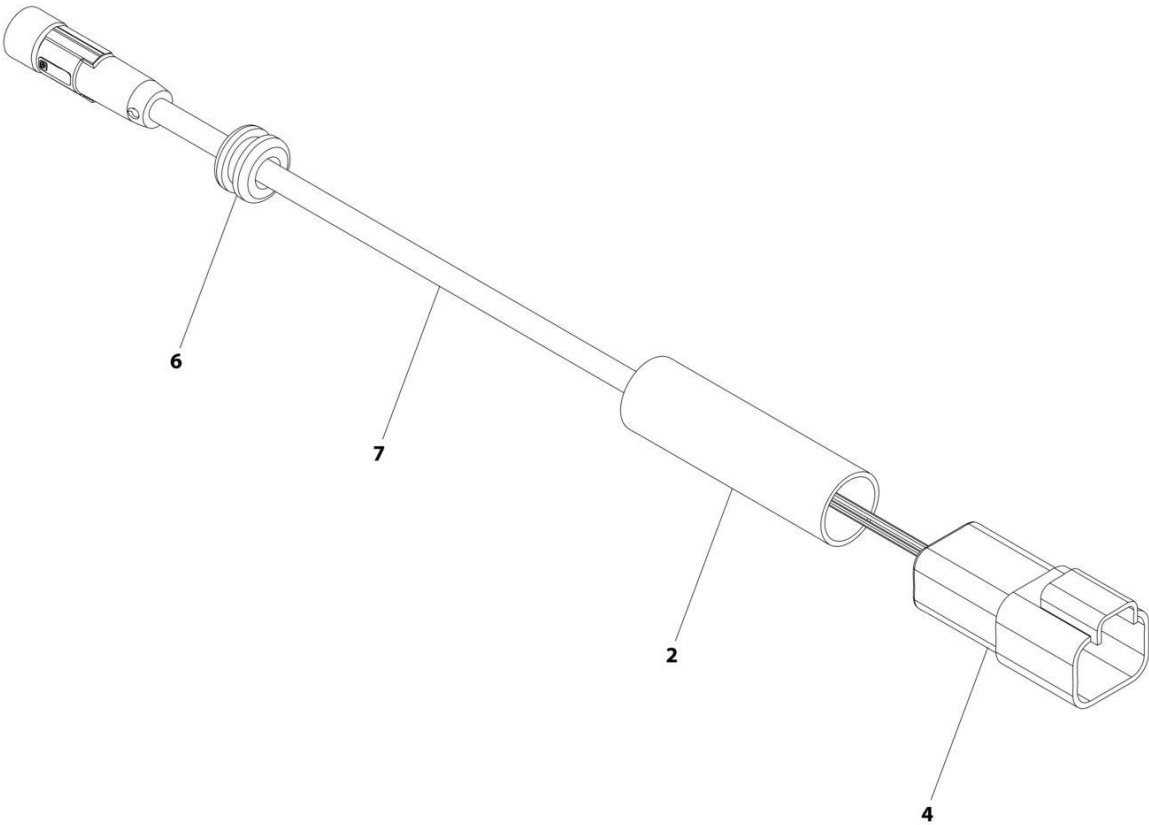

ART_1001237863


SECTION 8 - ELECTRICAL

FIGURE 8-48. SKYEYE RECEIVER HARNESS (PVC 2001)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001237863	Ref	SKYEYE RECEIVER HARNESS	A
2	2820247	AR	Tubing, Heat Shrink	
4	1001097051	1	Connector - 4 Position	
4	1001119620	4	Pin, Male	
6	1001227996	1	Grommet	
7	1001237862	1	Cable, M8 Female Cordset	

SECTION 8 - ELECTRICAL

FIGURE 8-49. SKYEYE RECEIVER HARNESS (PVC 2007)

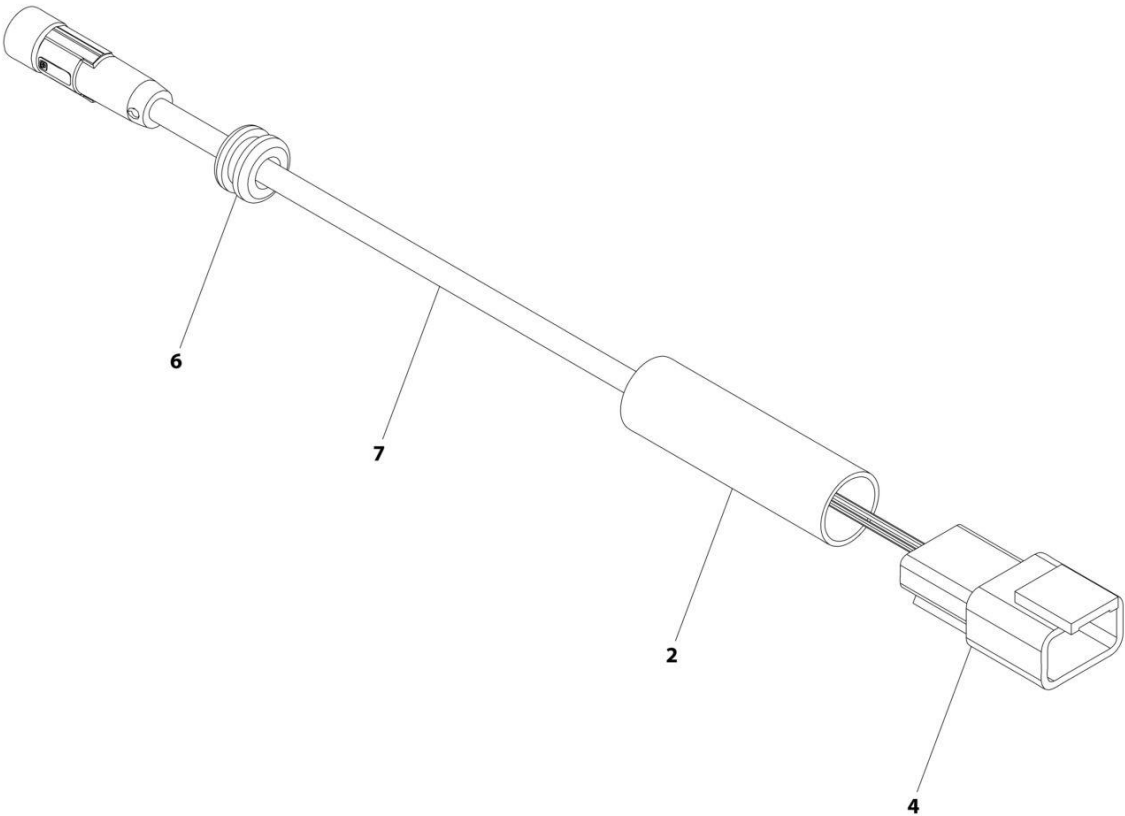

ART_1001237863_B


SECTION 8 - ELECTRICAL

FIGURE 8-49. SKYEYE RECEIVER HARNESS (PVC 2007)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001237863	Ref	SKYEYE RECEIVER HARNESS	B
2	2820247	AR	Tubing, Heat Shrink	
4	1001097051	1	Connector - 4 Position	
4	1001119620	4	Pin, Male	
6	1001227996	1	Grommet	
7	1001258495	1	Cable, M8 Female Cordset	

SECTION 8 - ELECTRICAL

FIGURE 8-50. SKYEYE EMITTER HARNESS (PVC 2001)

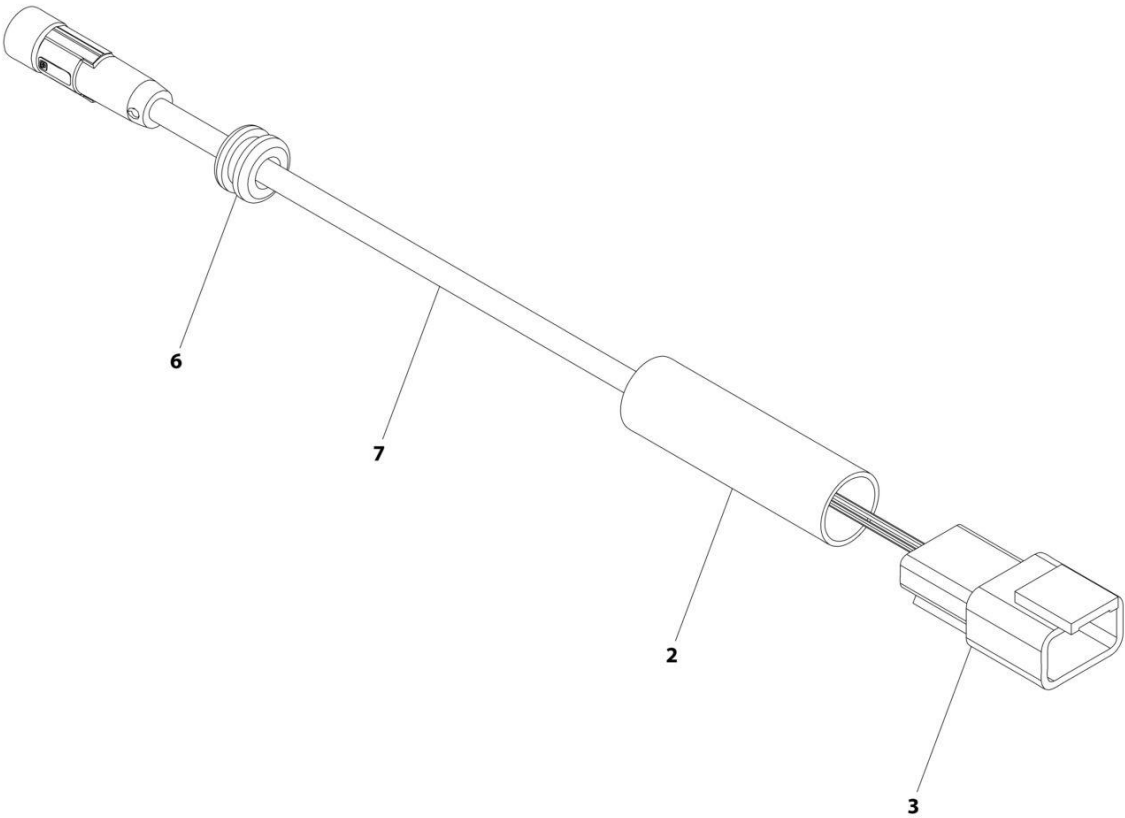

ART_1001237864


SECTION 8 - ELECTRICAL

FIGURE 8-50. SKYEYE EMITTER HARNESS (PVC 2001)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001237864	Ref	SKYEYE EMITTER HARNESS	A
2	2820247	AR	Tubing, Heat Shrink	
3	4460910	1	Connector - 3 Position	
3	1001119620	3	Pin, Male	
6	1001227996	1	Grommet	
7	1001237862	1	Cable, M8 Female Cordset	

SECTION 8 - ELECTRICAL

FIGURE 8-51. SKYEYE EMITTER HARNESS (PVC 2007)

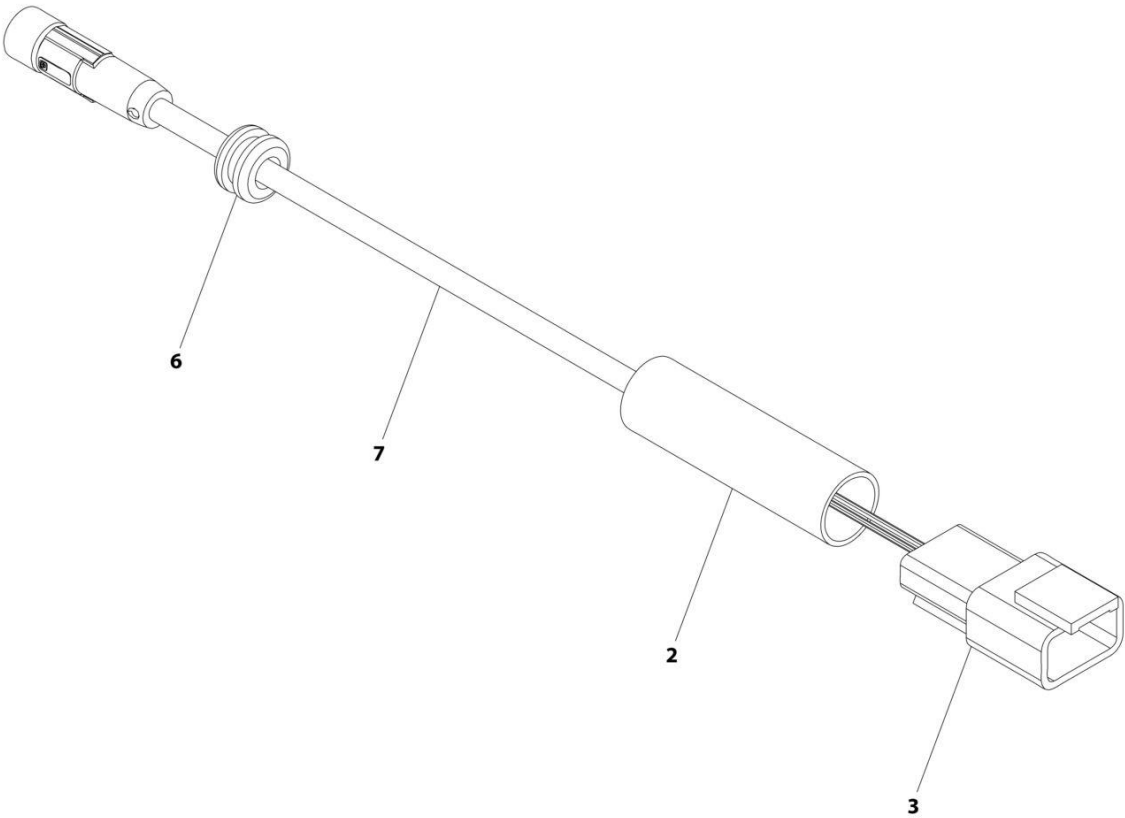

ART_1001237864_B


SECTION 8 - ELECTRICAL

FIGURE 8-51. SKYEYE EMITTER HARNESS (PVC 2007)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001237864	Ref	SKYEYE EMITTER HARNESS	B
2	2820247	AR	Tubing, Heat Shrink	
3	4460910	1	Connector - 3 Position	
3	1001119620	3	Pin, Male	
6	1001227996	1	Grommet	
7	1001258495	1	Cable, M8 Female Cordset	

SECTION 8 - ELECTRICAL

FIGURE 8-52. STROBE LIGHT HARNESS (BLUE AND RED LIGHTS)

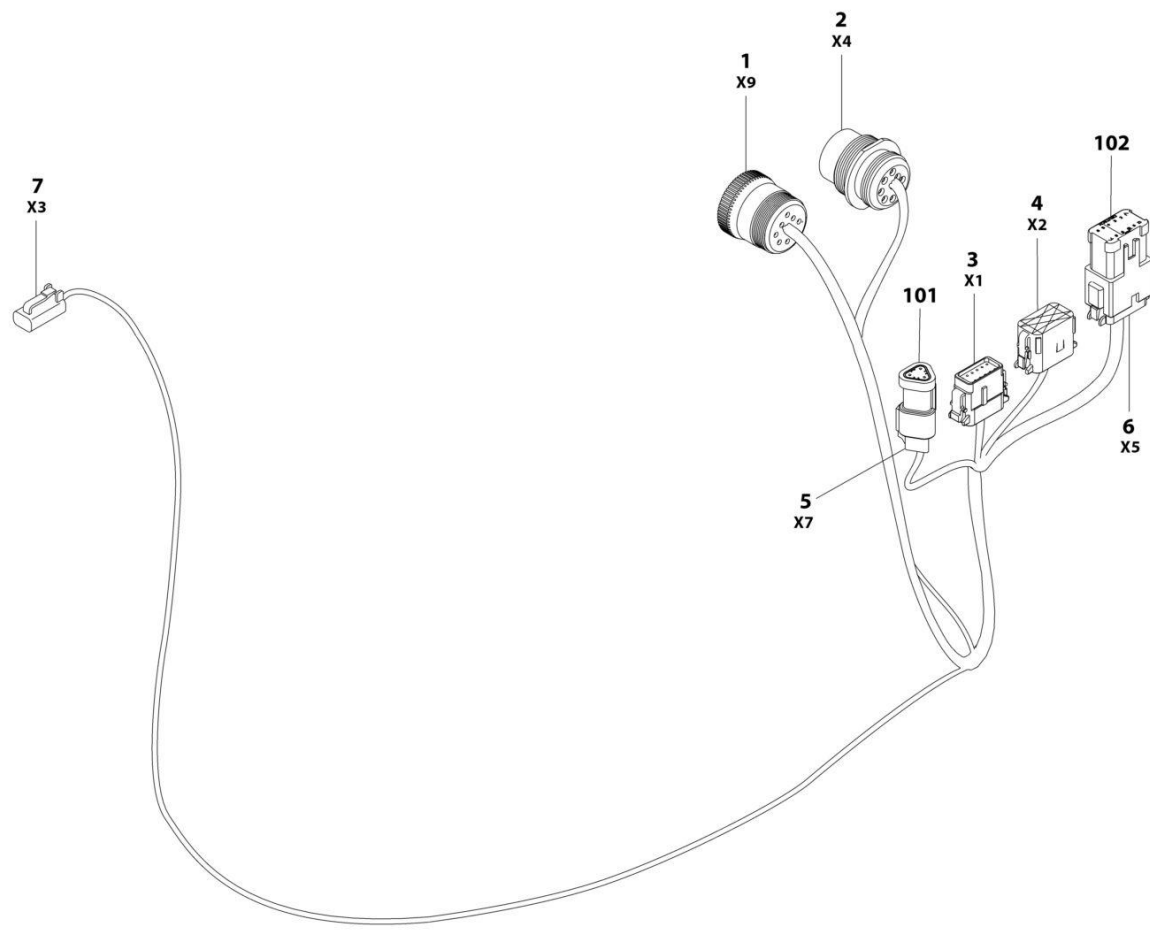

ART_1001142736


SECTION 8 - ELECTRICAL

FIGURE 8-52. STROBE LIGHT HARNESS (BLUE AND RED LIGHTS)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001142736	Ref	STROBE LIGHT HARNESS (BLUE AND RED LIGHTS)	F
1	1001112796	1	Connector - 9 Position	
1	4460465	6	Socket, Female	
1	4460466	3	Plug, Socket	
2	1001112612	1	Connector - 9 Position	
2	4460464	6	Pin, Male	
2	4460466	3	Plug, Socket	
3	1001116808	1	Connector - 12 Position	
3	4460928	3	Socket, Female	
3	4460518	9	Plug, Socket	
4	1001116774	1	Connector - 12 Position	
4	4460928	3	Socket, Female	
4	4460518	9	Plug, Socket	
5	4461095	1	Connector - 3 Position	
5	4460465	3	Socket, Female	
6	4460933	1	Connector - 12 Position	
6	4460465	12	Socket, Female	
7	4460891	1	Connector - 2 Position	
7	4460465	2	Socket, Female	
101	4461070	1	Connector - 3 Position	
102	1001119020	1	Connector, Female Bussbar - 12 Position	

SECTION 8 - ELECTRICAL

FIGURE 8-53. TRACTION HARNESS (PVC 2001)

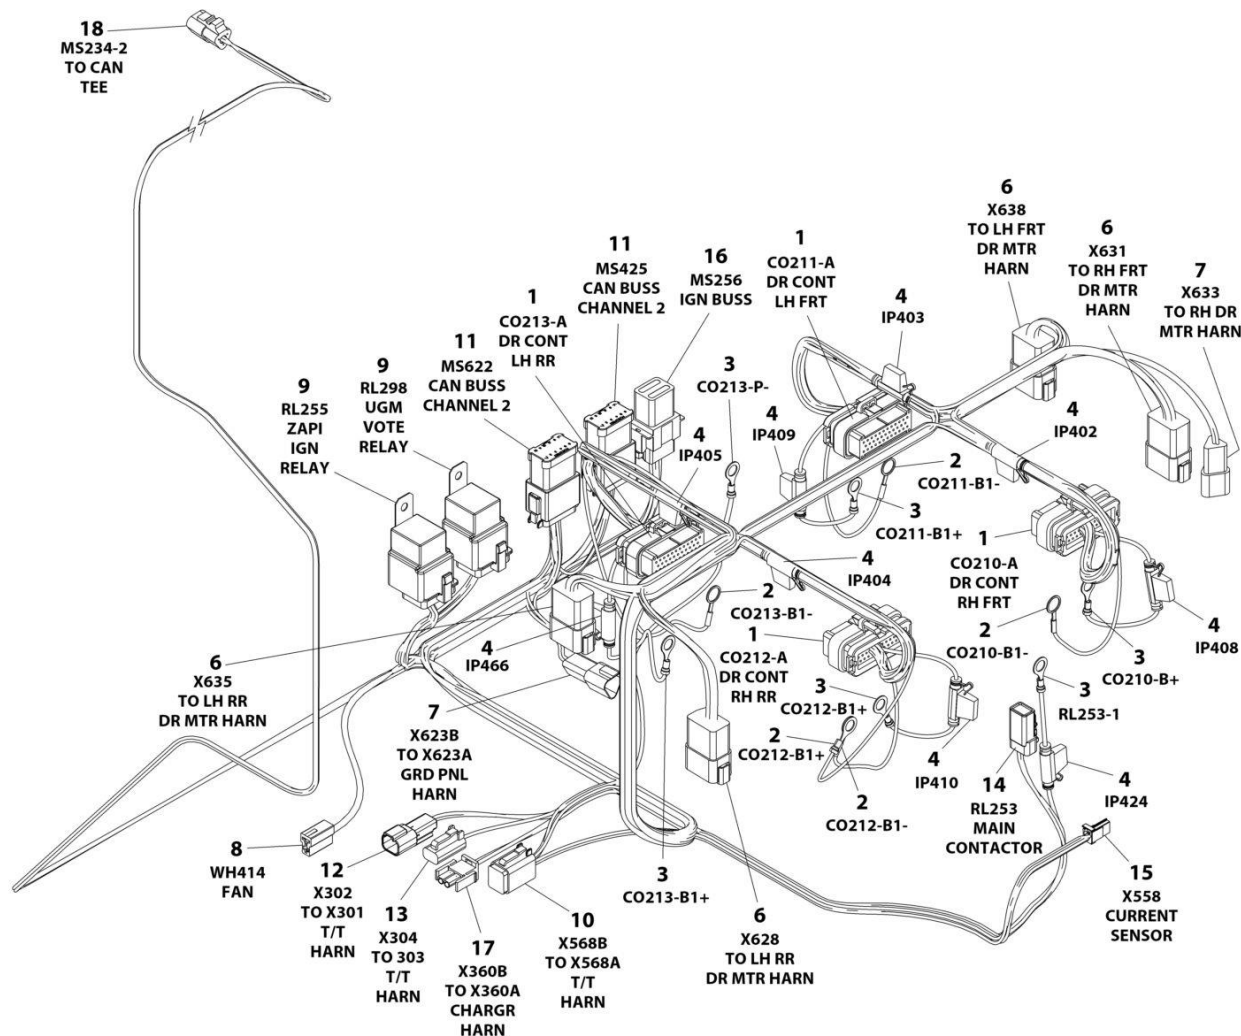

ART_1001161871


SECTION 8 - ELECTRICAL

FIGURE 8-53. TRACTION HARNESS (PVC 2001)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001161871	Ref	TRACTION HARNESS	J
1	4460873	4	Connector - 35 Position	
1	4460871	60	Socket, Female	
1	4460905	80	Plug, Terminal	
2	4460703	5	Terminal, Ring	
3	4460670	5	Terminal, Ring	
4	2400060	9	Fuseholder with Cover	
4	1001170760	9	Fuse 10Amp	
6	4460931	4	Receptacle, Female - 8 Position	
6	4460464	32	Pin, Male	
7	4460536	2	Receptacle, Female - 3 Position	
7	4460464	6	Pin, Male	
8	4460994	1	Receptacle, Female - 2 Position	
8	1001116723	2	Terminal	
9	1001171295	2	Relay	
9	4460374	2	Plug, Relay	
9	4460375	8	Terminal	
10	4460894	1	Plug, Male - 6 Position	
10	4460465	5	Socket, Female	
10	4460466	1	Plug, Terminal	
11	4460933	2	Plug, Male - 12 Position	
11	4460944	24	Socket, Female	
11	1001119020	2	Bussbar - 12 Position	
12	4460897	1	Receptacle, Female - 2 Position	
12	4460464	2	Pin, Male	
13	4460891	1	Plug, Male - 2 Position	
13	4460465	1	Socket, Female	
13	4460466	1	Plug, Terminal	
14	1001126245	1	Receptacle, Female - 2 Position	
14	1001126008	2	Terminal	
15	1001183402	1	Connector - 4 Position	
15	1001183405	4	Terminal	
16	4460851	1	Plug, Male - 12 Position	
16	4460465	6	Socket, Female	
16	4460942	1	Socket, Female	
16	4460466	1	Plug, Terminal	
16	4460852	1	Bussbar - 12 Position	
17	4460320	1	Plug, Male - 2 Position	
17	4460267	2	Terminal	
18	4460539	1	Plug, Male - 3 Position	
18	4460944	3	Socket, Female	

SECTION 8 - ELECTRICAL

FIGURE 8-54. TRACTION HARNESS (PVC 2007)

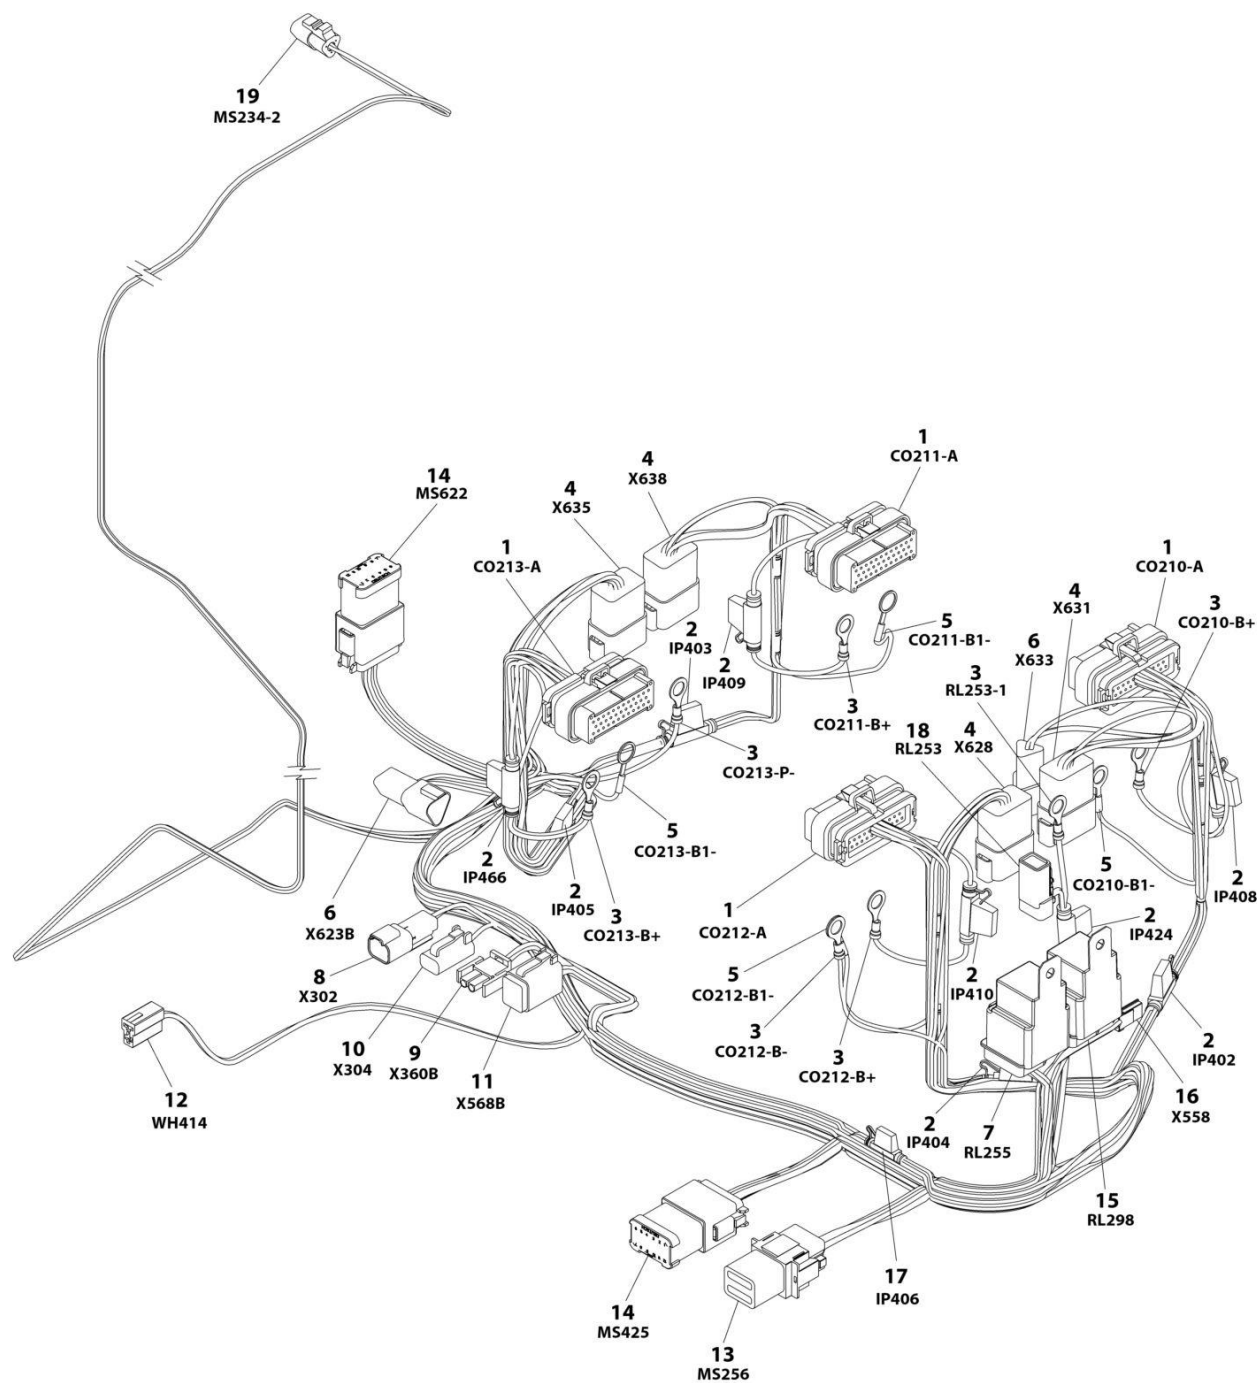

ART_1001161871_K

SECTION 8 - ELECTRICAL

FIGURE 8-54. TRACTION HARNESS (PVC 2007)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001161871	Ref	TRACTION HARNESS	K
1	4460873	4	Connector - 35 Position	
1	4460871	59	Socket, Female	
1	4460905	81	Plug, Terminal	
2	1001255901	9	Fuseholder with Cover	
2	1001170760	9	Fuse 10Amp	
3	4460670	7	Terminal, Ring	
4	4460931	4	Receptacle, Female - 8 Position	
4	4460464	32	Pin, Male	
5	4460703	4	Terminal, Ring	
6	4460536	2	Receptacle, Female - 3 Position	
6	4460464	6	Pin, Male	
7	1001117057	1	Connector, Relay	
7	1001116732	3	Terminal	
7	1001166733	1	Terminal	
7	1001171295	1	Relay	
8	4460897	1	Receptacle, Female - 2 Position	
8	4460464	2	Pin, Male	
9	4460320	1	Plug, Male - 2 Position	
9	4460267	2	Terminal	
10	4460891	1	Plug, Male - 2 Position	
10	4460465	1	Socket, Female	
10	4460466	1	Plug, Terminal	
11	4460894	1	Plug, Male - 6 Position	
11	4460465	5	Socket, Female	
11	4460466	1	Plug, Terminal	
12	4460994	1	Receptacle, Female - 2 Position	
12	1001116723	2	Terminal	
13	4460851	1	Plug, Male - 12 Position	
13	4460465	7	Socket, Female	
13	4460466	1	Plug, Terminal	
13	4460852	1	Bussbar - 12 Position	
14	4460933	1	Plug, Male - 12 Position	
14	4460944	12	Socket, Female	
14	1001119020	2	Bussbar - 12 Position	
15	1001117057	1	Connector, Relay	
15	1001116732	4	Terminal	
15	1001171295	1	Relay	
16	1001183402	1	Connector - 4 Position	
16	1001183405	4	Terminal	
17	1001255901	1	Fuseholder with Cover	
17	8229242	1	Fuse 5Amp	
18	1001126245	1	Receptacle, Female - 2 Position	
18	1001126008	2	Terminal	

328

H340AJ



SECTION 8 - ELECTRICAL

FIGURE 8-55. TURNTABLE HARNESS


ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001165923	Ref	TURNTABLE HARNESS	H
1	4460873	1	Connector - 35 Position (Black)	
1	4460871	24	Socket, Female	
1	4460905	11	Plug, Terminal	
2	4460878	1	Connector - 4 Position	
2	4460887	4	Terminal	
3	2400066	2	Fuseholder Less Fuse	
3	8229244	2	Fuse 15Amp	
4	4460874	1	Connector - 35 Position (Natural)	
4	4460871	20	Socket, Female	
4	4460905	15	Plug, Terminal	
5	4460761	1	Connector - 4 Position	
5	4460227	4	Pin, Male	
6	4460894	1	Connector - 6 Position	
6	4460465	4	Socket, Female	
6	4460466	2	Plug, Terminal	
6	4460892	1	Connector - 6 Position Bussbar	
6	1001121172	1	Mount, Terminal	
7	4460836	1	Connector - 12 Position	
7	4460465	5	Socket, Female	
7	4460466	7	Plug, Terminal	
7	4460837	1	Connector - 12 Position Bussbar	
7	1001121172	1	Mount, Terminal	
8	1001172064	1	Fuseholder Less Fuse	
8	1001172227	1	Fuse 40Amp ATO	
9	2400066	1	Fuseholder Less Fuse	
9	2400065	1	Fuse 30 Amp	
10	2400066	1	Fuseholder Less Fuse	
10	2400064	1	Fuse 5Amp	
11	3990010	2	Diode 6Amp	
12	4460312	1	Ring, Terminal	
12	1001176230	1	Boot, Battery	
13	4461018	1	Connector - 2 Position	
13	4460509	2	Socket, Female	
14	1001117025	3	Connector - 5 Position Relay	
14	1001116734	4	Terminal, Female	
14	1001116732	6	Terminal, Female	
14	1001116733	2	Terminal, Female	
15	4460930	1	Connector - 8 Position	
15	4460465	3	Socket, Female	
15	4460466	3	Plug, Terminal	
16	1001184846	2	Connector - 10 Position Bussbar	
16	4460509	15	Socket, Female	
16	4460466	5	Plug, Terminal	
17	4460312	1	Ring, Terminal	
17	1001176229	1	Boot, Battery	
18	1001103012	1	Connector - 4 Position	
18	1001107854	1	Socket, Female	
19	4460933	2	Connector - 12 Position	
19	4460465	14	Socket, Female	

SECTION 8 - ELECTRICAL

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
19	4460466	10	Plug, Terminal	
19	1001119020	2	Connector, Bussbar	
19	1001155967	2	Bracket, Mounting	
20	4460897	3	Connector - 2 Position	
20	4460464	6	Pin, Male	
21	4460899	3	Connector - 6 Position	
21	4460464	14	Pin, Male	
21	4460466	4	Plug, Terminal	
22	2400060	1	Fuseholder Less Fuse	
22	See Note	1	Fuse 10Amp (Note: Not Available - Purchase Locally)	
23	4460891	5	Connector - 2 Position	
23	4460465	10	Socket, Female	
24	4460884	2	Connector - 4 Position	
24	4460465	7	Socket, Female	
24	4460466	1	Plug, Terminal	
25	4461110	1	Connector - 16 Position	
25	4461112	9	Terminal, Female	
25	4461222	7	Plug, Terminal	
26	4461017	1	Connector - 2 Position	
26	4460508	2	Pin, Male	
27	4460142	3	Ring, Terminal	
28	1001151788	1	Connector - 4 Position	
28	1001151824	2	Terminal	
29	4460866	1	Connector - 19 Position	
29	4460943	3	Pin, Male	
29	4460508	4	Pin, Male	
29	4460464	4	Pin, Male	
29	4460466	8	Plug, Terminal	

SECTION 8 - ELECTRICAL

FIGURE 8-56. VALVE HARNESS

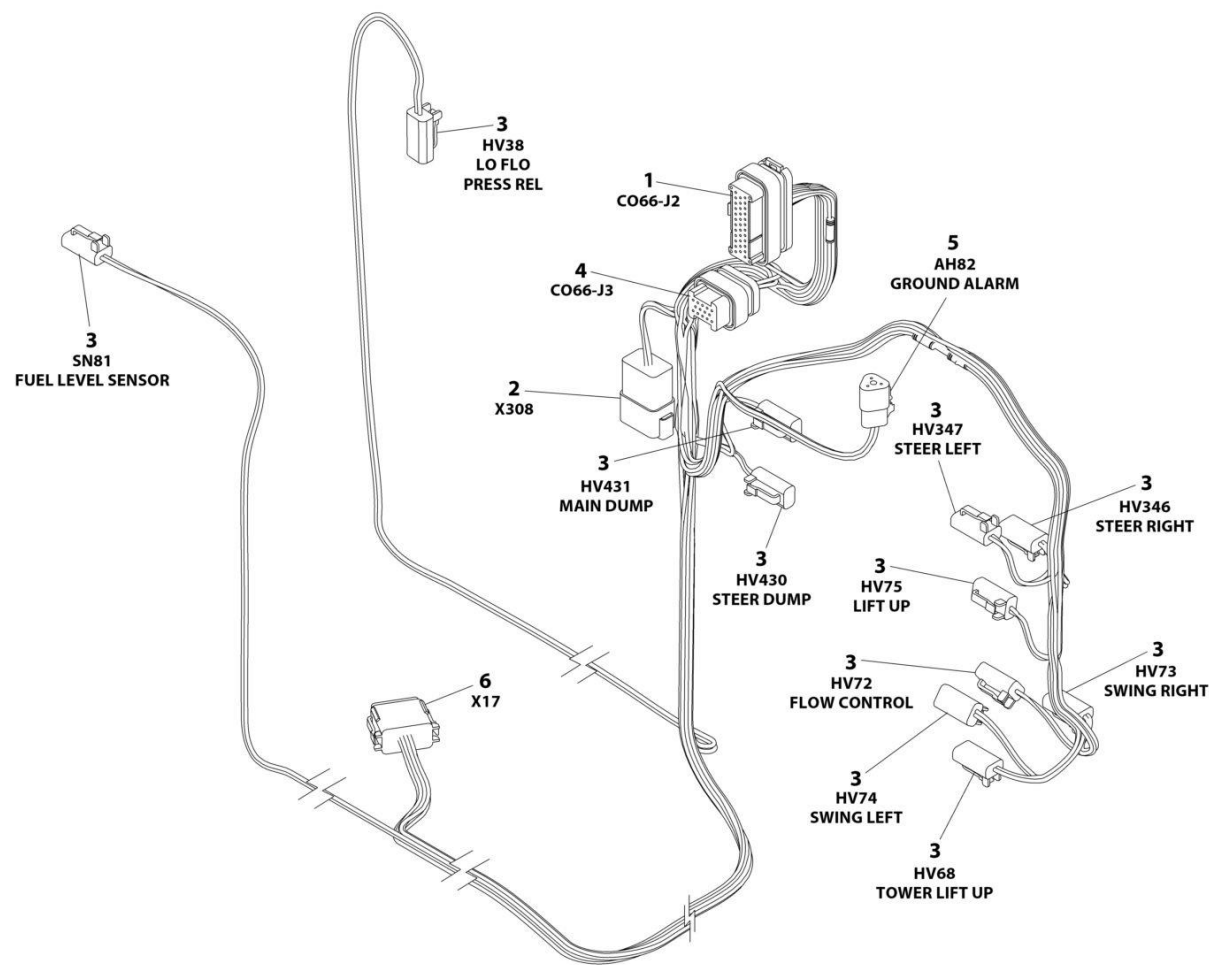

ART_1001245669

SECTION 8 - ELECTRICAL


FIGURE 8-56. VALVE HARNESS

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001245669	Ref	VALVE HARNESS	A
1	4460875	1	Connector - 35 Position	
1	4460871	27	Socket, Female	
1	4460905	8	Plug, Terminal	
2	4460931	1	Connector - 8 Position	
2	4460464	3	Pin, Male	
2	4460466	5	Plug, Terminal	
3	4460891	11	Connector - 2 Position	
3	4460465	22	Socket, Female	
4	4460872	1	Connector - 14 Position	
4	4460871	7	Socket, Female	
4	4460905	7	Plug, Terminal	
5	4460539	1	Connector - 3 Position	
5	4460465	3	Socket, Female	
6	4460933	1	Connector - 12 Position	
6	4460465	9	Socket, Female	
6	4460466	3	Plug, Terminal	

SECTION 9 - DECALS

SECTION 9 - DECALS

FIGURE 9-1. DECALS INSTALLATION – ANSI, ANSI EXPORT CSA AND CHINA SPECS (ENGLISH)

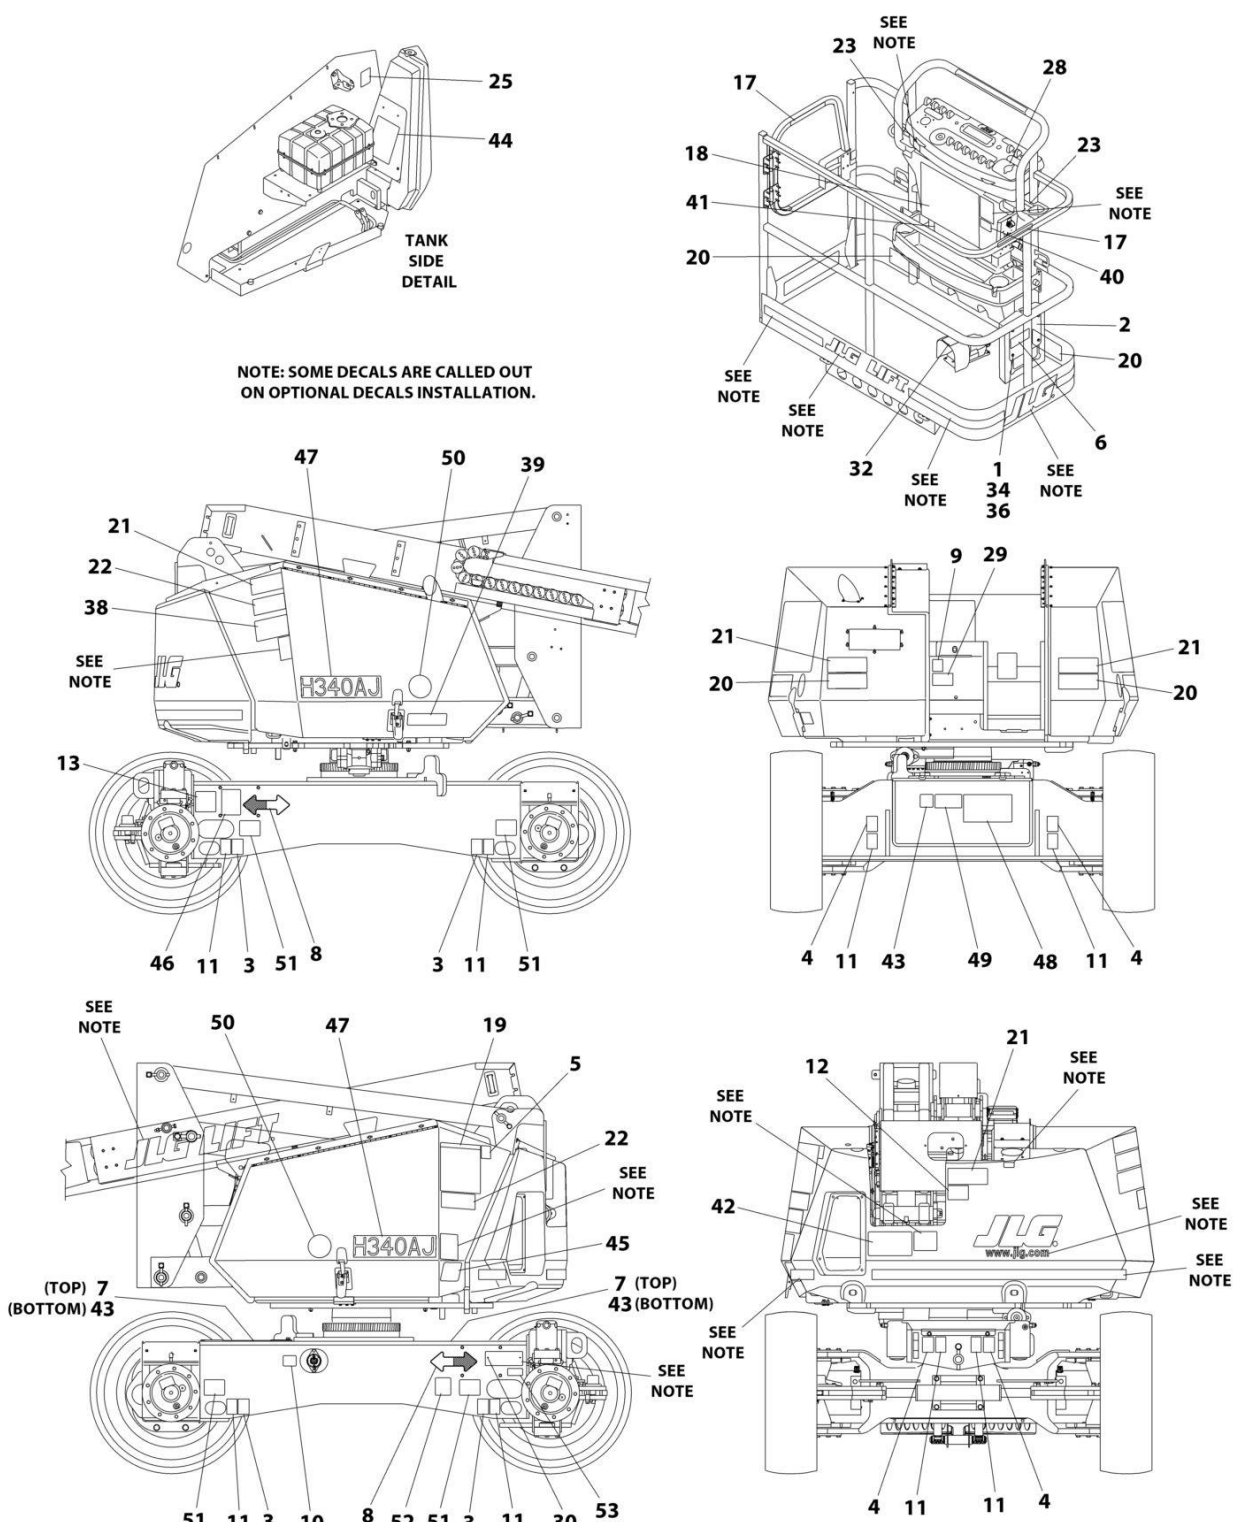

ART_1001247062


SECTION 9 - DECALS

FIGURE 9-1. DECALS INSTALLATION – ANSI, ANSI EXPORT CSA AND CHINA SPECS (ENGLISH)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001247062	Ref	DECALS INSTALLATION	C
1	0760610	4	Bolt M6 x 20	
2	0860520	1	Box, Manual Storage	
3	1701499	4	Decal - No Tie-Down/No Lift	
4	1701500	4	Decal - Lift	
5	1701504	1	Decal - Hydraulic Oil	
6	1701509	1	Decal - Manual	
7	1701529	2	Decal - Arrow	
8	1701642	2	Decal - Arrow	
9	1701644	1	Decal - Battery Charger	
10	1702155	1	Decal - Battery Disconnect	
11	1702300	8	Decal - Tie-Down	
12	1702391	1	Decal - Crushing	
13	See Note	1	Decal - Bar Code (Note: Not Available for Purchase)	
17	1702868	2	Decal - No Hands	
18	1703797	1	Decal - Danger/Warning	
19	1703798	1	Decal - Danger/Warning	
20	1703804	4	Decal - Warning Crushing	
21	1703805	4	Decal - Electrocution	
22	1703953	2	Decal - Warning Crushing	
23	1704277	2	Decal - Lanyard Attach	
25	1704412	1	Decal - Hydraulic Oil	
28	1705351	1	Decal - Drive/Steer Instructions	
29	1705929	1	Decal - Charger	
30	2080057	2	Fastener	
32	3252347	1	Nameplate - Footswitch	
34	3290605	4	Nut M6	
36	4811700	8	Washer M6	
38	1001119576	1	Decal - Lift Diagram	
39	1001119981	1	Decal - Manual Turntable Rotate	
40	1001120002	1	Decal - No Pipe Racks	
41	1001253920	1	Decal - Warning Single Cap	
42	1001253921	1	Decal - Warning Single Cap	
43	1001125483	3	Decal - Pressure Wash	
44	1001127549	1	Decal - Manual Descent	
45	1001127588	1	Decal - Manual Descent	
46	1001131269	1	Decal - Patent	
47	1001170058	2	Decal - H340AJ	
48	1001170061	1	Decal - Cable Routing	
49	1001170676	1	Decal - Tip Over	
50	1001174449	2	Decal - Hybrid	
51	1001182809	4	Decal - Tire Load	
52	1001223055	1	Decal - Yearly Inspection	
53	1001228370	1	Decal - ICES	

SECTION 9 - DECALS

FIGURE 9-2. DECALS INSTALLATION - AUSTRALIAN SPEC (ENGLISH)

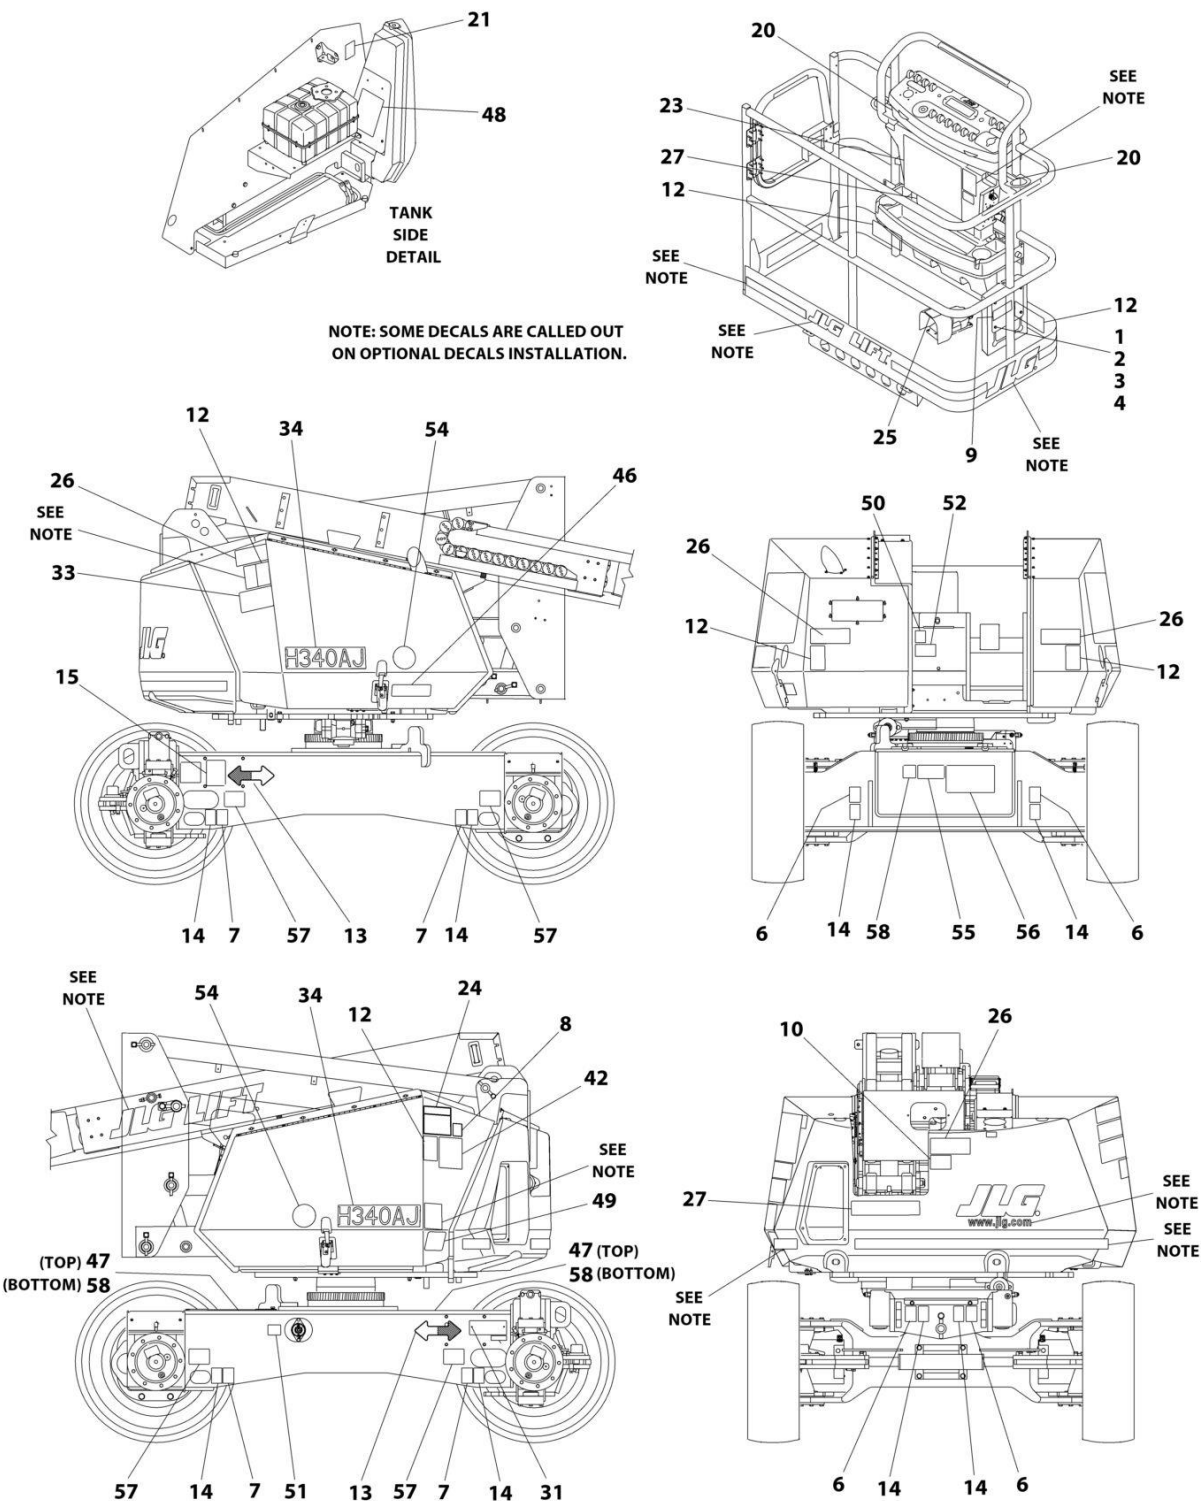

ART_1001169311


SECTION 9 - DECALS

FIGURE 9-2. DECALS INSTALLATION - AUSTRALIAN SPEC (ENGLISH)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001169311	Ref	DECALS INSTALLATION - AUSTRALIAN SPEC (ENGLISH)	G
1	0760610	4	Bolt M6 x 20	
2	4811700	8	Washer M6	
3	3290605	4	Nut M6	
4	0860520	1	Box, Manual Storage	
6	1701500	4	Decal - Lift	
7	1701499	4	Decal - No Tie-Down/No Lift	
8	1701504	1	Decal - Hydraulic Oil	
9	1701509	1	Decal - Manual	
10	1701517	1	Decal - Crushing	
12	1701518	6	Decal - Crushing	
13	1701642	2	Decal - Arrow	
14	1702300	8	Decal - Tie-Down	
15	See Note	1	Decal - Bar Code (Note: Not Available for Purchase)	
20	1704277	2	Decal - Lanyard Attach	
21	1704412	1	Decal - Hydraulic Oil	
23	1705921	1	Decal - Tipping/Electrocution	
24	1705822	1	Decal - Electrocution/Safety Manual	
25	1705828	1	Decal - Footswitch	
26	1705961	4	Decal - Electrocution	
27	1705978	2	Decal - Capacity 230KG	
31	2080057	2	Fastener	
33	1001119576	1	Decal - Lift Diagram	
34	1001170058	2	Decal - H340AJ	
42	1001112551	1	Decal - Emergency Controls	
46	1001119981	1	Decal - Manual Turntable Rotate	
47	1701529	2	Decal - Arrow	
48	1001127549	1	Decal - Manual Descent	
49	1001127588	1	Decal - Manual Descent	
50	1701644	1	Decal - Battery Charger	
51	1702155	1	Decal - Battery Disconnect	
52	1706077	1	Decal - Battery Charger	
54	1001174449	2	Decal - Hybrid	
55	1001170060	1	Decal - Tip Over	
56	1001170061	1	Decal - Cable Routing	
57	1001182809	4	Decal - Tire Load	
58	1001125483	3	Decal - Pressure Wash	

SECTION 9 - DECALS

FIGURE 9-3. DECALS INSTALLATION - BRAZIL SPEC (PORTUGUESE/SPANISH)

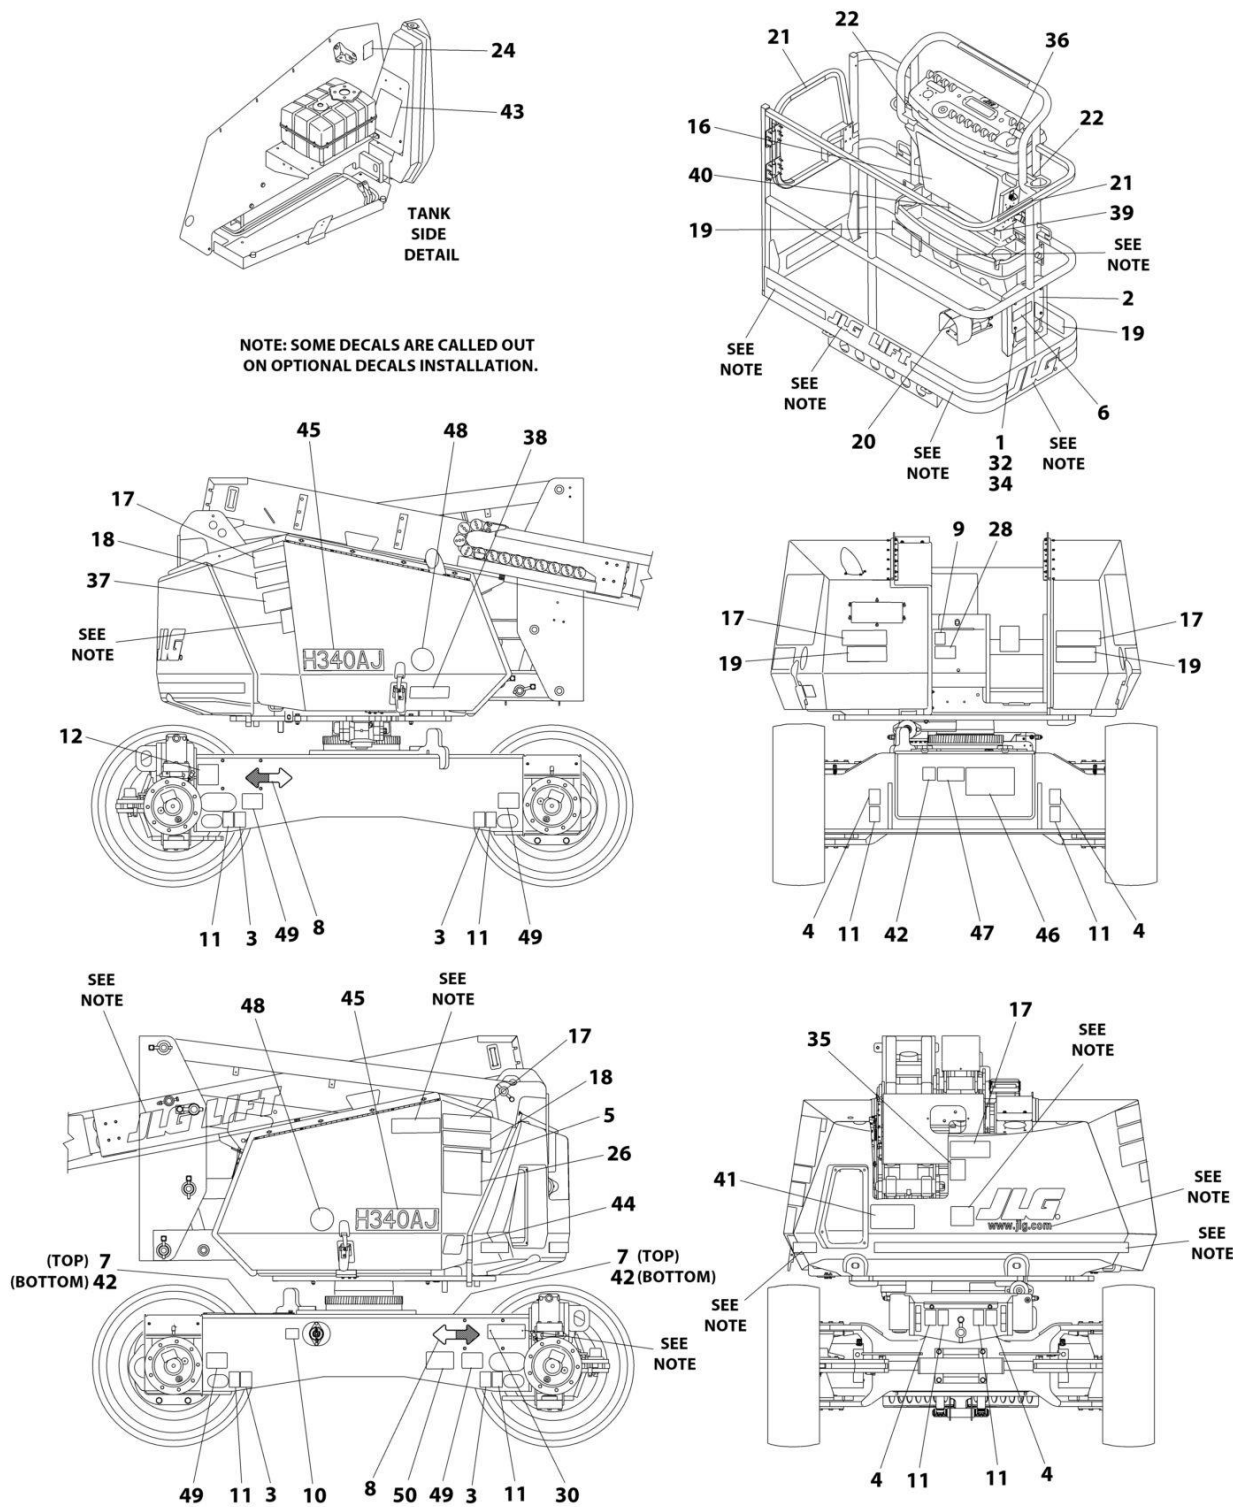

ART_1001247067


SECTION 9 - DECALS

FIGURE 9-3. DECALS INSTALLATION - BRAZIL SPEC (PORTUGUESE/SPANISH)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001247067	Ref	DECALS INSTALLATION	B
1	0760610	4	Bolt M6 x 20	
2	0860520	1	Box, Manual Storage	
3	1701499	4	Decal - No Tie-Down/No Lift	
4	1701500	4	Decal - Lift	
5	1701504	1	Decal - Hydraulic Oil	
6	1701509	1	Decal - Manual	
7	1701529	2	Decal - Arrow	
8	1701642	2	Decal - Arrow	
9	1701644	1	Decal - Battery Charger	
10	1702155	1	Decal - Battery Disconnect	
11	1702300	8	Decal - Tie-Down	
12	See Note	1	Decal - Bar Code (Note: Not Available for Purchase)	
16	1703928	1	Decal - Danger/Warning	
17	1703940	5	Decal - Electrocution	
18	1703946	2	Decal - Warning Crushing	
19	1703952	4	Decal - Warning Crushing	
20	1703985	1	Decal, Foot Switch	
21	1704002	2	Decal - No Hand	
22	1704277	2	Decal - Lanyard Attach	
24	1704412	1	Decal - Hydraulic Oil Chart	
26	1705349	1	Decal - Warning Inspection	
28	1706089	1	Decal - Battery Charging Instructions	
30	2080057	2	Fastener	
32	3290605	4	Nut M6	
34	4811700	8	Washer M6	
35	1001113170	1	Decal - Hand Crushing	
36	1001113680	1	Decal - Drive/Steer Instructions	
37	1001119576	1	Decal - Lift Diagram	
38	1001119981	1	Decal - Manual Turntable Rotate	
39	1001120282	1	Decal - No Pipe Racks	
40	1001253928	1	Decal - Warning Single Cap	
41	1001253929	1	Decal - Warning Single Cap	
42	1001125483	3	Decal - Pressure Wash	
43	1001127549	1	Decal - Manual Descent	
44	1001127588	1	Decal - Manual Descent	
45	1001170058	2	Decal - H340AJ	
46	1001170061	1	Decal - Cable Routing	
47	1001170670	1	Decal - Tip-over	
48	1001174449	2	Decal - Hybrid	
49	1001182809	4	Decal - Tire Load	
50	1001224052	1	Decal - Yearly Inspection	

SECTION 9 - DECALS

FIGURE 9-4. DECALS INSTALLATION - CE SPECS (ENGLISH)

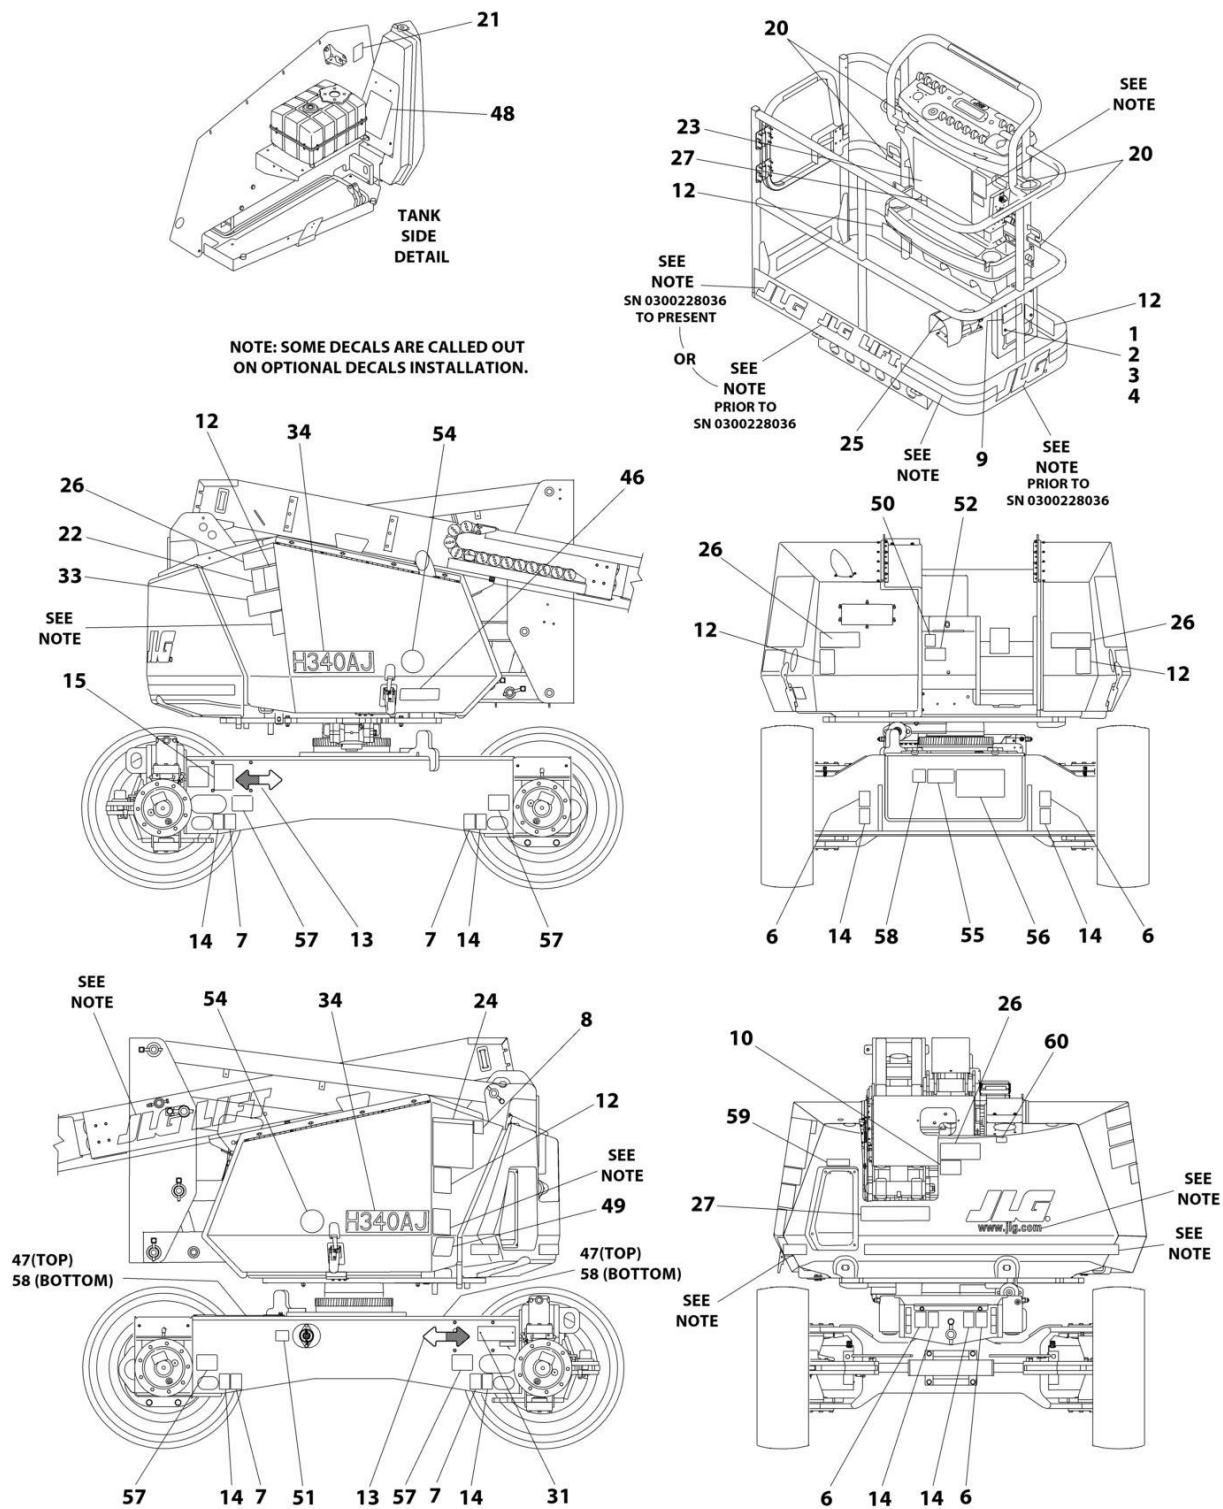

ART_1001169317


SECTION 9 - DECALS

FIGURE 9-4. DECALS INSTALLATION - CE SPECS (ENGLISH)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001169317	Ref	DECALS INSTALLATION - CE SPEC (ENGLISH)	H
1	0760610	4	Bolt M6 x 20	
2	4811700	8	Washer M6	
3	3290605	4	Nut M6	
4	0860520	1	Box, Manual Storage	
6	1701500	4	Decal - Lift	
7	1701499	4	Decal - No Tie-Down/No Lift	
8	1701504	1	Decal - Hydraulic Oil	
9	1701509	1	Decal - Manual	
10	1701517	1	Decal - Crushing	
12	1701518	6	Decal - Crushing	
13	1701642	2	Decal - Arrow	
14	1702300	8	Decal - Tie-Down	
15	See Note	1	Decal - Bar Code (Note: Not Available for Purchase)	
20	1704277	2	Decal - Lanyard Attach	
21	1704412	1	Decal - Hydraulic Oil	
22	1001170059	1	Decal - Sound Power	
23	1705921	1	Decal - Tipping/Electrocution	
24	1705822	1	Decal - Electrocution/Safety Manual	
25	1705828	1	Decal - Footswitch	
26	1705961	4	Decal - Electrocution	
27	1705978	2	Decal - Capacity 230KG	
31	2080057	2	Fastener	
33	1001119576	1	Decal - Lift Diagram	
34	1001170058	2	Decal - H340AJ	
46	1001119981	1	Decal - Manual Turntable Rotate	
47	1701529	2	Decal - Arrow	
48	1001127549	1	Decal - Manual Descent	
49	1001127588	1	Decal - Manual Descent	
50	1701644	1	Decal - Battery Charger	
51	1702155	1	Decal - Battery Disconnect	
52	1706077	1	Decal - Battery Charger	
54	1001174449	2	Decal - Hybrid	
55	1001170060	1	Decal - Tip Over	
56	1001170061	1	Decal - Cable Routing	
57	1001182809	4	Decal - Tire Load	
58	1001125483	3	Decal - Pressure Wash	
59	1001189882	1	Decal - MSSO	
60	1001139654	1	Decal - Ultra Low Sulphur Diesel Fuel	

SECTION 9 - DECALS

FIGURE 9-5. DECALS INSTALLATION - CSA SPEC (FRENCH/ENGLISH)

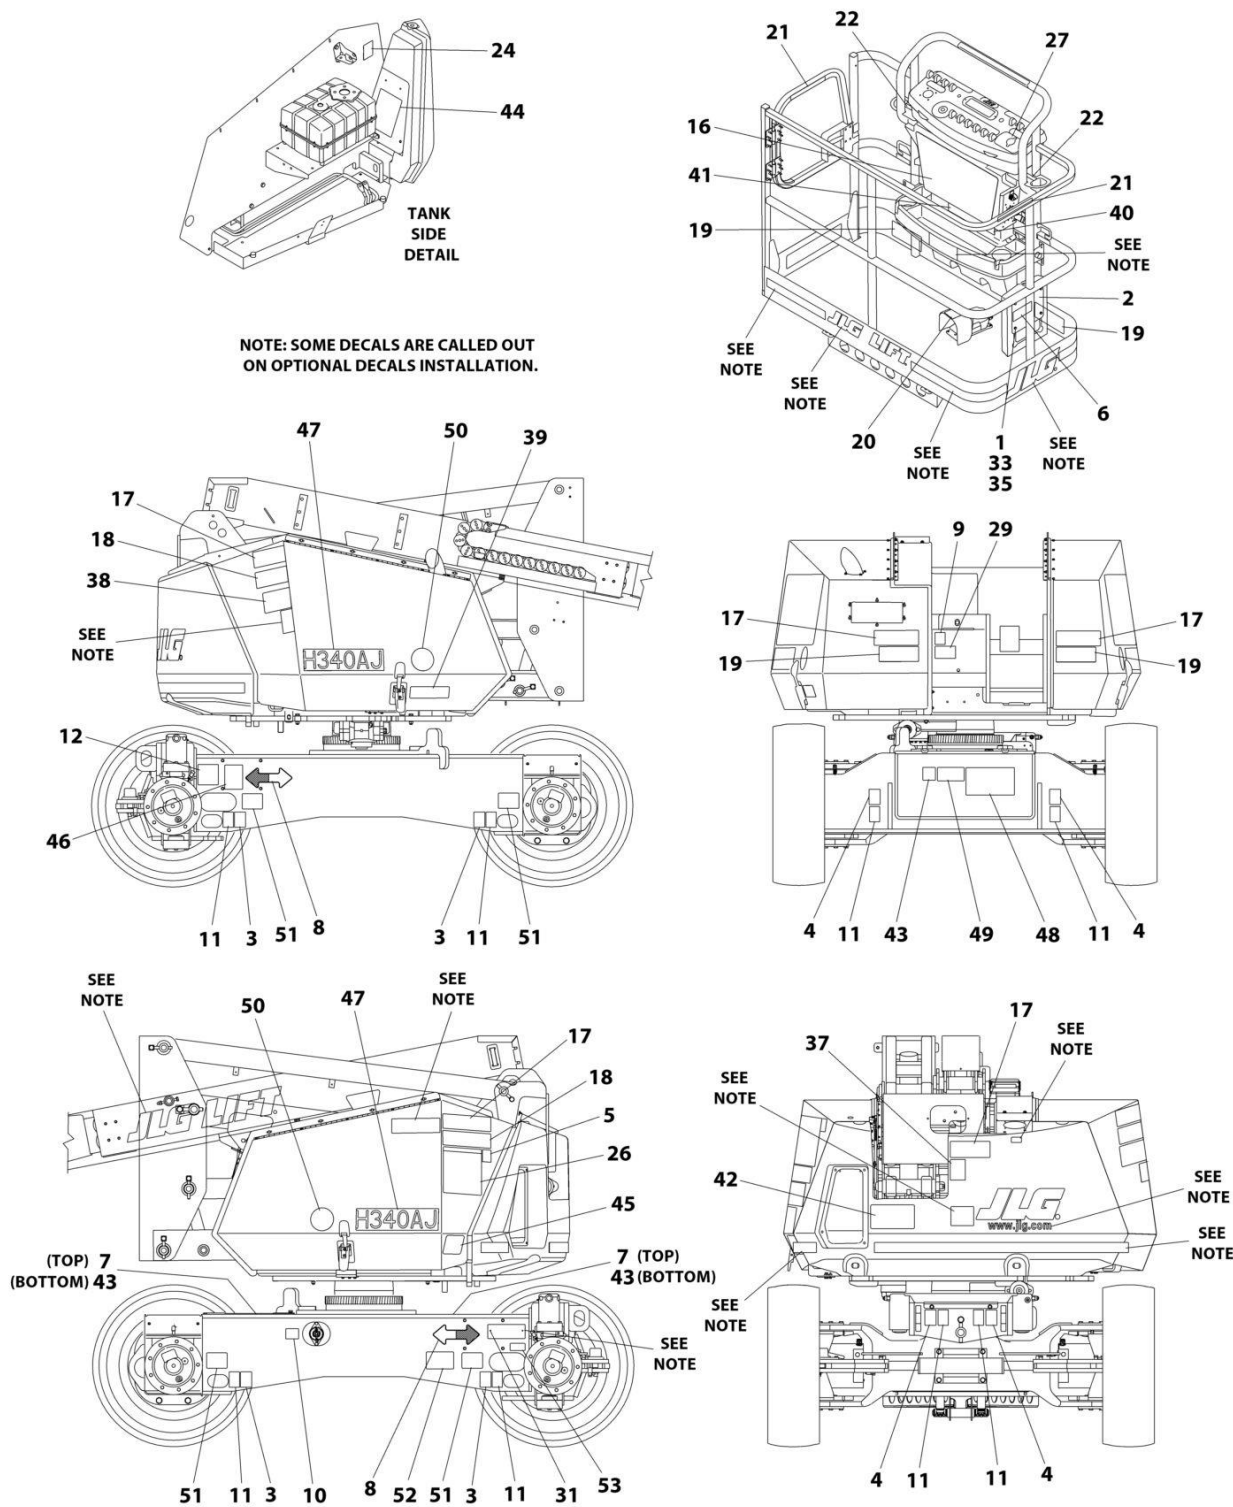

ART_1001247065


SECTION 9 - DECALS

FIGURE 9-5. DECALS INSTALLATION - CSA SPEC (FRENCH/ENGLISH)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001247065	Ref	DECALS INSTALLATION	B
1	0760610	4	Bolt M6 x 20	
2	0860520	1	Box, Manual Storage	
3	1701499	4	Decal - No Tie-Down/No Lift	
4	1701500	4	Decal - Lift	
5	1701504	1	Decal - Hydraulic Oil	
6	1701509	1	Decal - Manual	
7	1701529	2	Decal - Arrow	
8	1701642	2	Decal - Arrow	
9	1701644	1	Decal - Battery Charger	
10	1702155	1	Decal - Battery Disconnect	
11	1702300	8	Decal - Tie-Down	
12	See Note	1	Decal - Bar Code (Note: Not Available for Purchase)	
16	1703924	1	Decal - Danger/Warning	
17	1703936	5	Decal - Electrocution	
18	1703942	2	Decal - Warning Crushing	
19	1703948	4	Decal - Warning Crushing	
20	1703984	1	Decal - Foot Switch	
21	1704000	2	Decal - No Hand	
22	1704277	2	Decal - Lanyard Attach	
24	1704412	1	Decal - Hydraulic Oil Chart	
26	1705347	1	Decal - Warning Inspection	
27	1705429	1	Decal - Drive/Steer Instructions	
29	1706097	1	Decal - Battery Charging Instructions	
31	2080057	2	Fastener	
33	3290605	4	Nut M6	
35	4811700	8	Washer M6	
37	1001113169	1	Decal - Hand Crushing	
38	1001119576	1	Decal - Lift Diagram	
39	1001119981	1	Decal - Manual Turntable Rotate	
40	1001120004	1	Decal - No Pipe Racks	
41	1001253932	1	Decal - Warning Single Cap	
42	1001253923	1	Decal - Warning Single Cap	
43	1001125483	3	Decal - Pressure Wash	
44	1001127549	1	Decal - Manual Descent	
45	1001127588	1	Decal - Manual Descent	
46	1001131269	1	Decal - Patent Boom Lifts	
47	1001170058	2	Decal - H340AJ	
48	1001170061	1	Decal - Cable Routing	
49	1001170672	1	Decal - Tip-over	
50	1001174449	2	Decal - Hybrid	
51	1001182809	4	Decal - Tire Load	
52	1001223971	1	Decal - Yearly Inspection	
53	1001228370	1	Decal - ICES	

SECTION 9 - DECALS

FIGURE 9-6. DECALS INSTALLATION - CHINESE SPEC (CHINESE/ENGLISH)

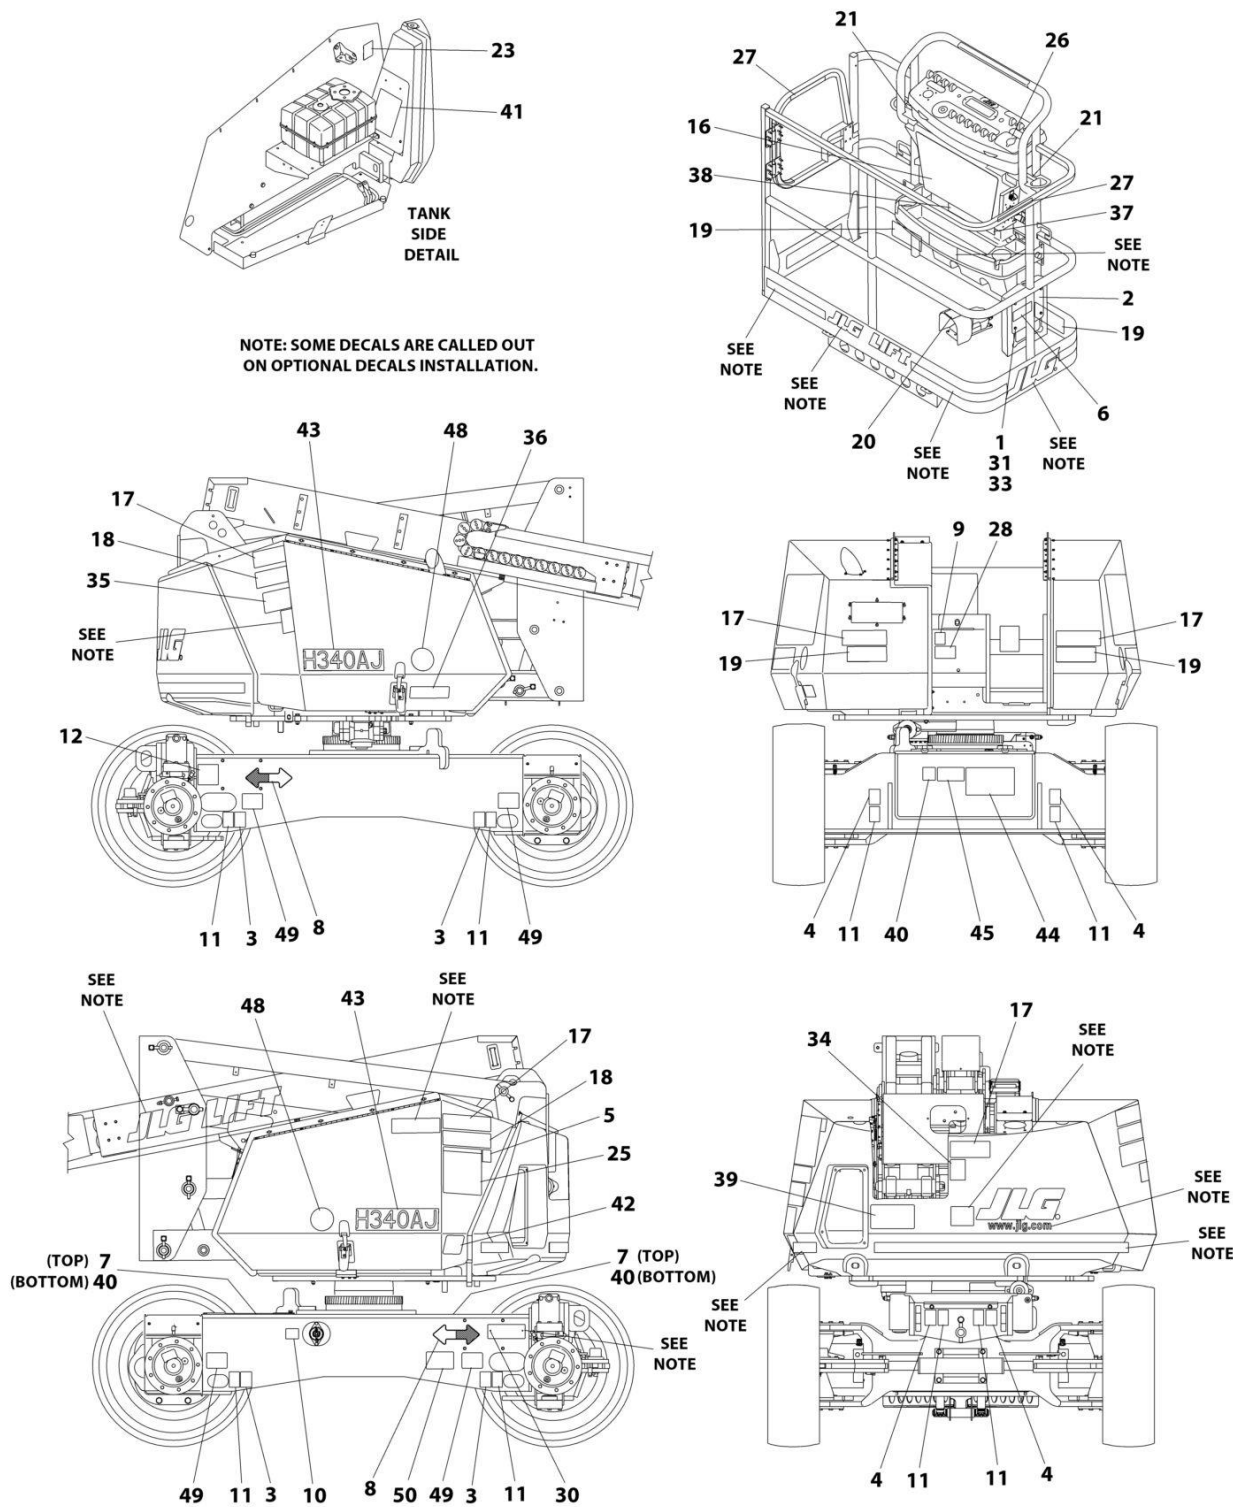

ART_1001247066


SECTION 9 - DECALS

FIGURE 9-6. DECALS INSTALLATION - CHINESE SPEC (CHINESE/ENGLISH)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001247066	Ref	DECALS INSTALLATION	C
1	0760610	4	Bolt M6 x 20	
2	0860520	1	Box, Manual Storage	
3	1701499	4	Decal - No Tie-Down/No Lift	
4	1701500	4	Decal - Lift	
5	1701504	1	Decal - Hydraulic Oil	
6	1701509	1	Decal - Manual	
7	1701529	2	Decal - Arrow	
8	1701642	2	Decal - Arrow	
9	1701644	1	Decal - Battery Charger	
10	1702155	1	Decal - Battery Disconnect	
11	1702300	8	Decal - Tie-Down	
12	See Note	1	Decal - Bar Code (Note: Not Available for Purchase)	
16	1703925	1	Decal - Danger/Warning	
17	1703937	5	Decal - Drive/Steer Instructions	
18	1703943	2	Decal - Warning Crushing	
19	1703949	4	Decal - Warning Crushing	
20	1703982	1	Decal - Foot Switch	
21	1704277	2	Decal - Lanyard Attach	
23	1704412	1	Decal - Hydraulic Oil Chart	
25	1705348	1	Decal - Electrocution	
26	1705430	1	Decal - Drive/Steer Instructions	
27	1705968	2	Decal - No Hand	
28	1706093	1	Decal - Battery Charging Instructions	
30	2080057	2	Fastener	
31	3290605	4	Nut M6	
33	4811700	8	Washer M6	
34	1001113168	1	Decal - Hand Crushing	
35	1001119576	1	Decal - Lift Diagram	
36	1001119981	1	Decal - Manual Turntable Rotate	
37	1001120281	1	Decal - No Pipe Racks	
38	1001253926	1	Decal - Warning Single Cap	
39	1001253927	1	Decal - Warning Single Cap	
40	1001125483	3	Decal - Pressure Wash	
41	1001127549	1	Decal - Manual Descent	
42	1001127588	1	Decal - Manual Descent	
43	1001170058	2	Decal - H340AJ	
44	1001170061	1	Decal - Cable Routing	
45	1001170671	1	Decal - Tip-over	
48	1001174449	2	Decal - Hybrid	
49	1001182809	4	Decal - Tire Load	
50	1001224050	1	Decal - Yearly Inspection	

SECTION 9 - DECALS

FIGURE 9-7. DECALS INSTALLATION - JAPANESE SPEC (JAPANESE/ENGLISH)

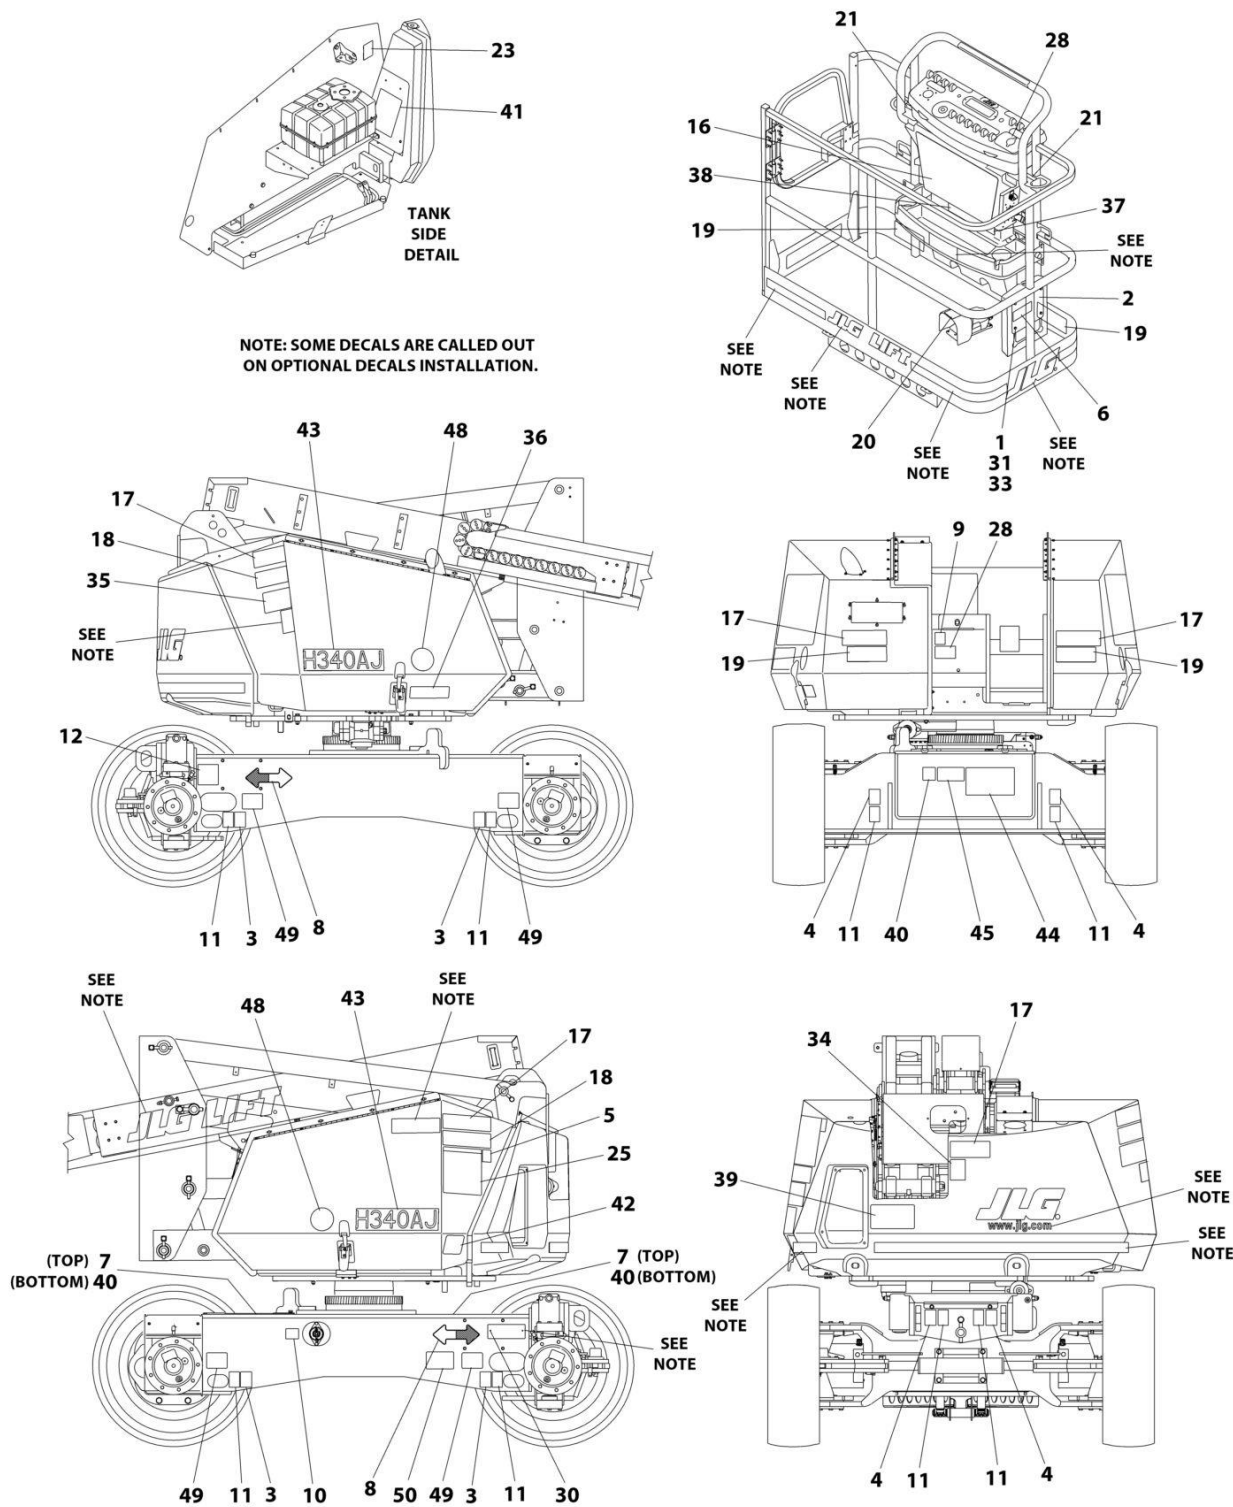

ART_1001247063


SECTION 9 - DECALS

FIGURE 9-7. DECALS INSTALLATION - JAPANESE SPEC (JAPANESE/ENGLISH)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001247063	Ref	DECALS INSTALLATION	C
1	0760610	4	Bolt M6 x 20	
2	0860520	1	Box, Manual Storage	
3	1701499	4	Decal - No Tie-Down/No Lift	
4	1701500	4	Decal - Lift	
5	1701504	1	Decal - Hydraulic Oil	
6	1701509	1	Decal - Manual	
7	1701529	2	Decal - Arrow	
8	1701642	2	Decal - Arrow	
9	1701644	1	Decal - Battery Charger	
10	1702155	1	Decal - Battery Disconnect	
11	1702300	8	Decal - Tie-Down	
12	See Note	1	Decal - Bar Code (Note: Not Available for Purchase)	
16	1703926	1	Decal - Danger/Warning	
17	1703938	5	Decal - Electrocution	
18	1703944	2	Decal - Warning Crushing	
19	1703950	4	Decal - Warning Crushing	
20	1703980	1	Decal - Foot Switch	
21	1704277	2	Decal - Lanyard Attach	
23	1704412	1	Decal - Hydraulic Oil Chart	
25	1705344	1	Decal - Warning Inspection	
26	1705426	1	Decal - Drive/Steer Instructions	
28	1706077	1	Decal - Battery Charging Instructions	
30	2080057	2	Fastener	
31	3290605	4	Nut M6	
33	4811700	8	Washer M6	
34	1001113166	1	Decal - Hand Crushing	
35	1001119576	1	Decal - Lift Diagram	
36	1001119981	1	Decal - Manual Turntable Rotate	
37	1001120279	1	Decal - No Pipe Racks	
38	1001253932	1	Decal - Warning Single Cap	
39	1001253933	1	Decal - Warning Single Cap	
40	1001125483	3	Decal - Pressure Wash	
41	1001127549	1	Decal - Manual Descent	
42	1001127588	1	Decal - Manual Descent	
43	1001170058	2	Decal - H340AJ	
44	1001170061	1	Decal - Cable Routing	
45	1001170674	1	Decal - Tip-over	
48	1001174449	2	Decal - Hybrid	
49	1001182809	4	Decal - Tire Load	
50	1001224053	1	Decal - Yearly Inspection	

350

H340AJ



ART 1001247064


SECTION 9 - DECALS

FIGURE 9-8. DECALS INSTALLATION - KOREAN SPEC (KOREAN/ENGLISH)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001247064	Ref	DECALS INSTALLATION	C
1	0760610	4	Bolt M6 x 20	
2	0860520	1	Box, Manual Storage	
3	1701499	4	Decal - No Tie-Down/No Lift	
4	1701500	4	Decal - Lift	
5	1701504	1	Decal - Hydraulic Oil	
6	1701509	1	Decal - Manual	
7	1701529	2	Decal - Arrow	
8	1701642	2	Decal - Arrow	
9	1701644	1	Decal - Battery Charger	
10	1702155	1	Decal - Battery Disconnect	
11	1702300	8	Decal - Tie-Down	
12	See Note	1	Decal - Bar Code (Note: Not Available for Purchase)	
16	1703927	1	Decal - Danger/Warning	
17	1703939	5	Decal - Electrocuting	
18	1703945	2	Decal - Warning Crushing	
19	1703951	4	Decal - Warning Crushing	
20	1703981	1	Decal - Foot Switch	
21	1704277	2	Decal - Lanyard Attach	
23	1704412	1	Decal - Hydraulic Oil Chart	
25	1705345	1	Decal - Warning Inspection	
26	1705427	1	Decal - Drive/Steer Instructions	
27	1705969	2	Decal - Caution No Hands	
30	2080057	2	Fastener	
31	3290605	4	Nut M6	
33	4811700	8	Washer M6	
34	1001113509	1	Decal - Hand Crushing	
35	1001119576	1	Decal - Lift Diagram	
36	1001119981	1	Decal - Manual Turntable Rotate	
37	1001120280	1	Decal - No Pipe Racks	
38	1001253924	1	Decal - Warning Single Cap	
39	1001253925	1	Decal - Warning Single Cap	
40	1001125483	3	Decal - Pressure Wash	
41	1001127549	1	Decal - Manual Descent	
42	1001127588	1	Decal - Manual Descent	
43	1001170058	2	Decal - H340AJ	
44	1001170061	1	Decal - Cable Routing	
45	1001170673	1	Decal - Tip-over	
46	1001171296	1	Decal - Charging/Fire	
48	1001174449	2	Decal - Hybrid	
49	1001182809	4	Decal - Tire Load	
50	1001224048	1	Decal - Yearly Inspection	

SECTION 9 - DECALS

FIGURE 9-9. DECALS INSTALLATION - LATIN AMERICA SPEC (SPANISH/ENGLISH)

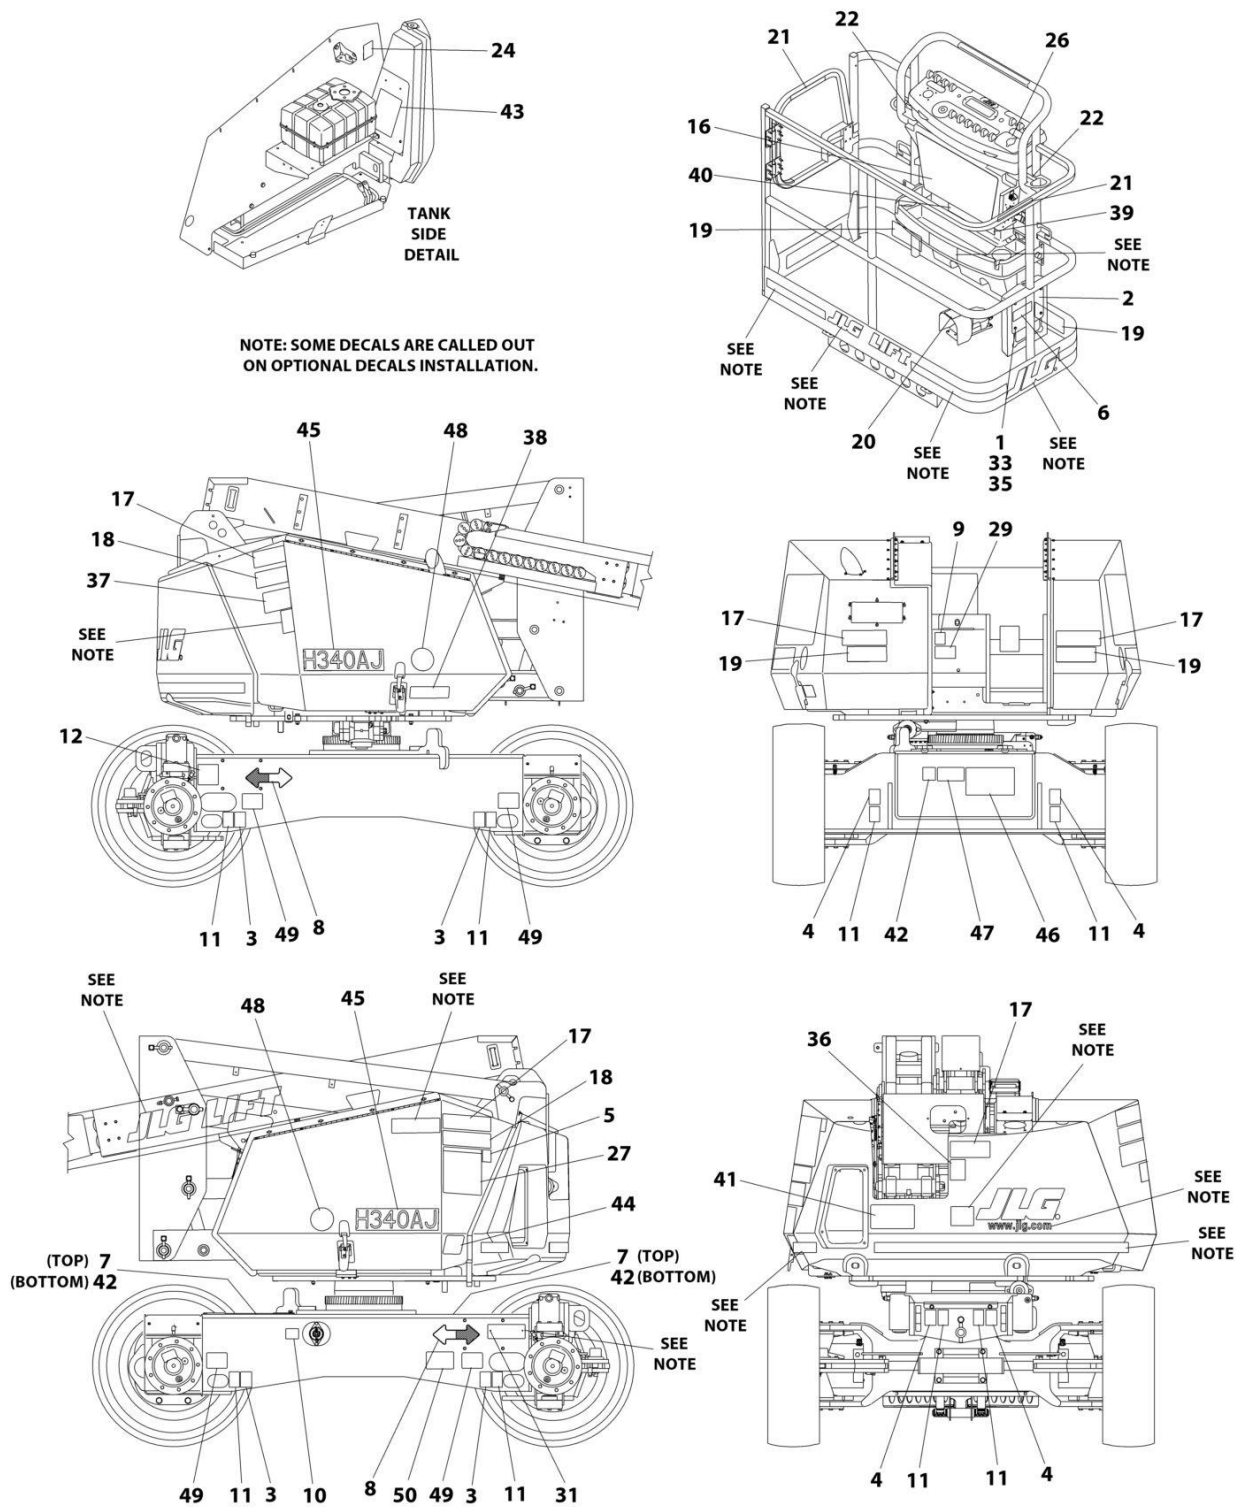

ART_1001247068


SECTION 9 - DECALS

FIGURE 9-9. DECALS INSTALLATION - LATIN AMERICA SPEC (SPANISH/ENGLISH)

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001247068	Ref	DECAL INSTALLATION	B
1	0760610	4	Bolt M6 x 20	
2	0860520	1	Box, Manual Storage	
3	1701499	4	Decal - No Tie-Down/No Lift	
4	1701500	4	Decal - Lift	
5	1701504	1	Decal - Hydraulic Oil	
6	1701509	1	Decal - Manual	
7	1701529	2	Decal - Arrow	
8	1701642	2	Decal - Arrow	
9	1701644	1	Decal - Battery Charger	
10	1702155	1	Decal - Battery Disconnect	
11	1702300	8	Decal - Tie-Down	
12	See Note	NSS	Decal - Bar Code (Note: Not Available for Purchase)	
16	1703923	1	Decal - Danger/Warning	
17	1703935	5	Decal - Electrocution	
18	1703941	2	Decal - Warning Crushing	
19	1703947	4	Decal - Warning Crushing	
20	1703983	1	Decal, Foot Switch	
21	1704001	2	Decal - No Hand	
22	1704277	2	Decal - Lanyard Attach	
24	1704412	1	Decal - Hydraulic Oil Chart	
26	1705910	1	Decal - Drive/Steer Instructions	
27	1705917	1	Decal - Warning Inspection	
29	1706085	1	Decal - Battery Charging Instructions	
31	2080057	2	Fastener	
33	3290605	4	Nut M6	
35	4811700	8	Washer M6	
36	1001113171	1	Decal - Hand Crushing	
37	1001119576	1	Decal - Lift Diagram	
38	1001119981	1	Decal - Manual Turntable Rotate	
39	1001120283	1	Decal - No Pipe Racks	
40	1001253930	1	Decal - Warning Single Cap	
41	1001253931	1	Decal - Warning Single Cap	
42	1001125483	3	Decal - Pressure Wash	
43	1001127549	1	Decal - Manual Descent	
44	1001127588	1	Decal - Manual Descent	
45	1001170058	2	Decal - H340AJ	
46	1001170061	1	Decal - Cable Routing	
47	1001170669	1	Decal - Tip-over	
48	1001174449	2	Decal - Hybrid	
49	1001182809	1	Decal - Tire Load	
50	1001224049	1	Decal - Yearly Inspection	

SECTION 9 - DECALS

FIGURE 9-10. OPTIONAL DECALS INSTALLATION

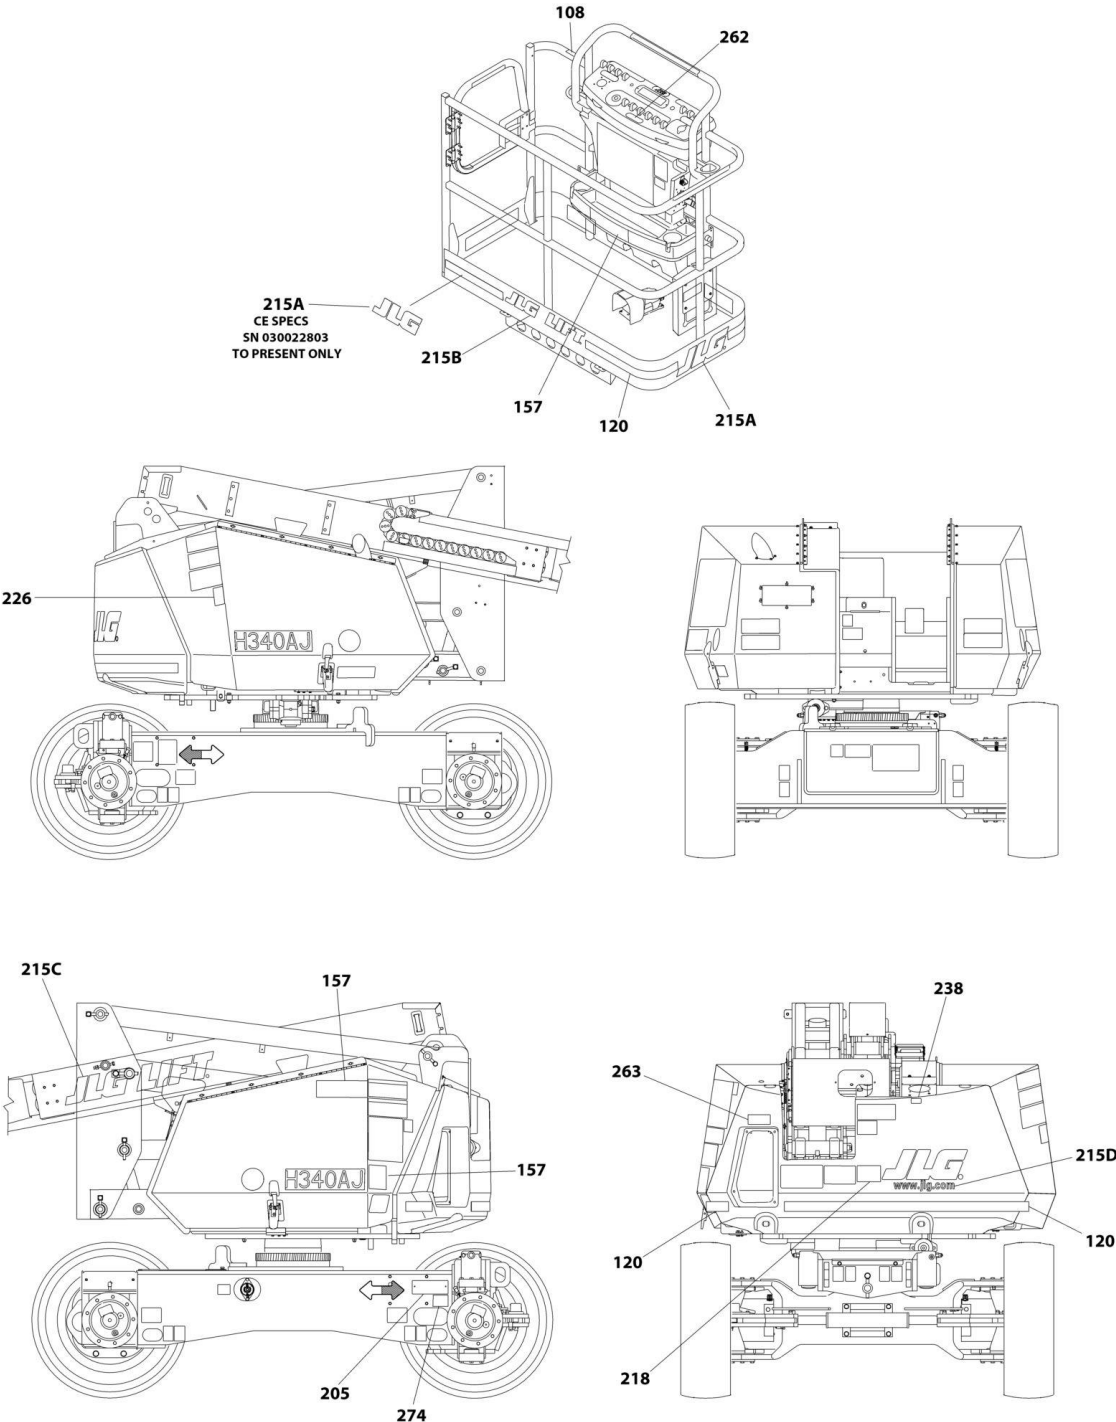

ART_DECAL_OPTIONS

FIGURE 9-10. OPTIONAL DECALS INSTALLATION

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
		Ref	OPTIONAL DECALS INSTALLATION	B
108	1001231801	1	Decal - Warning Proposition 65 (ANSI Specs)	
120	4420051	AR	Tape, Safety	
157	1704286	2	Decal - Generator Warning (ANSI, ANSI Export, CSA and China Specs)	
157	1001093687	2	Decal - Generator Warning (Australian & CE Specs)	
157	1704373	2	Decal - Generator Warning (Brazil Specs)	
157	1704368	2	Decal - Generator Warning (CSA Specs)	
157	1704372	2	Decal - Generator Warning (Chinese Specs)	
157	1704369	2	Decal - Generator Warning (Japanese Specs)	
157	1704370	2	Decal - Generator Warning (Korean Specs)	
157	1704371	2	Decal - Generator Warning (Latin America Specs)	
205	See Note	1	Nameplate - Manufacturers Serial Number (Note: Not Available for Purchase)	
215	1001110613	Ref	JLG Logo Installation	
215A	1702773	1	Decal - JLG	
215B	1702774	1	Decal - JLG Lift (3in)	
215C	1702860	1	Decal - JLG Lift (5in)	
215D	1704885	1	Decal - Website	
218	3251813	1	Decal - USA (ANSI, ANSI Export & CSA Specs)	
226	1704972	1	Decal - Warning Explosion/Fire (ANSI & CSA Specs)	
226	1706098	1	Decal - Warning Explosion/Fire (Australian & CE Specs)	
226	1706059	1	Decal - Warning Explosion/Fire (Brazil Specs)	
226	1706064	1	Decal - Warning Explosion/Fire (CSA Specs)	
226	1706060	1	Decal - Warning Explosion/Fire (Chinese Specs)	
226	1706062	1	Decal - Warning Explosion/Fire (Japanese Specs)	
226	1706061	1	Decal - Warning Explosion/Fire (Korean Specs)	
226	1706063	1	Decal - Warning Explosion/Fire (Latin America Specs)	
238	1001108923	1	Decal - Low Sulfur Fuel Spec (ANSI & CSA Specs Only)	
238	1001139654	1	Decal - Ultra Low Sulphur Diesel Fuel (CE & Japanese Specs Only)	
262	1001141300	1	Decal - SkyGuard Override	
263	1001189882	1	Decal - MSSO	
274	1001214029	Ref	EAC Decal Installation (Russia/CIS Specs)	
274	1001173703	1	Decal - EAC	

SECTION 10 - RECOMMENDED SERVICE PARTS STOCK

SECTION 10 - RECOMMENDED SERVICE PARTS STOCK

SECTION 10 - RECOMMENDED SERVICE PARTS STOCK

FIGURE 10-1. RECOMMENDED SERVICE PARTS STOCK

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
		Ref	Note: The following list will service one machine (built to current production per date on the front cover) with emergency repair parts which can be installed in the field. Parts from the list should be replaced when inventory is depleted to keep service parts stock supplied. For further information, contact your JLG dealer or the JLG Industries Parts Department.	
		Ref	STANDARD PARTS	
	70050516	1	Coil	
	70002963	1	Coil	
	1001170365	2	Fuse 400Amp	
	1001170484	2	Fuse 125Amp	
	1001170367	1	Contactor	
	70002971	1	Coil	
	70002386	1	Coil	
	70003788	1	Coil	
	1001178594	1	Filler/Air Breather Filter	
	1001178595	4	Element, Filter	
	4360328	1	Switch, Toggle	
	4360475	1	Switch, Emergency Stop	
	4360469	1	Switch, Key	
	2860030	1	Key, Replacement	
	1001219601	1	Sensor	
	1001159665	1	Relay, Contactor	
	1001190545	4	Strainer, Fuel	
	7015004	12	Element, Air Filter	
	7017980	12	Filter, Oil	
	7017992	12	Filter, Inline	
	4360407	1	Switch, Potentiometer	
	1001161710	1	Switch, Toggle	
	1001155045	1	Switch, Toggle	
	1001159256	1	Switch, Toggle	
	1001212415	1	Controller Assembly (Drive and Steer)	
	1001129555	1	Controller Assembly (Lift and Swing)	
	4360387	1	Switch, Toggle	
	1001170762	2	Fuse 30Amp	
	1001186489	2	Fuse 2Amp	
	1001170760	2	Fuse 10Amp	
	1001186431	1	Relay	
	1001171295	1	Relay	
	8229244	2	Fuse 15Amp	
	1001172227	2	Fuse 40Amp	
	2400065	2	Fuse 30Amp	
	2400064	2	Fuse 5Amp	
	8229242	2	Fuse 5Amp	
	3990010	2	Diode 6Amp	
		Ref	VARIABLE PARTS	
	1001170140	1	Module, Drive	
	1001119176	1	Switch, Limit	
	1001183213	1	Module, UGM	

SECTION 10 - RECOMMENDED SERVICE PARTS STOCK

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001142683	1	Module, Beacon Light (With SkyGuard)	
	1001155934	1	Module, Engine Controller	
	1001159754	1	Module, Diode	
	2940074	1	Latch (Machines with Gate)	
	1001169594	1	Module, Platform	
	1001137673	1	Switch, SkyGuard	
	4360548	1	Switch, Limit	

SECTION 11 - SPECIAL OPTIONS

SECTION 11 - SPECIAL OPTIONS

FIGURE 11-1. SPECIAL OPTIONS

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
		Ref	Note: This list is to accommodate machines ordered with special equipment. Options may not be applicable to all models. For more specific parts information contact JLG Parts Department.	
		Ref	MISCELLANEOUS SPECIAL OPTIONS	
	1001119028	Ref	Airline Installation (Machines without Arctic Package)	
	1001119378	Ref	Airline Installation (Machines with Arctic Package)	
	1001119803	Ref	Bellows Installation (Boom & Chassis)	
	1001119962	Ref	Boom Wipers Installation	
	1001172045	Ref	Cable Carrier Tray Installation	
		Ref	ClearSky Telematics (Factory Installed)	
	1001227454	Ref	ClearSky (Telematics) Installation (Factory Installed) - Canbus Connection (All Specs Except China Specs)	
	1001228956	Ref	ClearSky (Telematics) Installation (Factory Installed) - Canbus Connection (ANSI Export and CE Specs) ClearSky (Telematics) Installation (Factory Installed) - Canbus Connection (Australian Specs)	
	1001246486	Ref	ClearSky (Telematics) Installation (Factory Installed) - Canbus Connection (Australian Specs)	
	1001246487	Ref	ClearSky (Telematics) Installation (Factory Installed) - Canbus Connection (China Specs)	
	1001229107	Ref	3 Wire Connection (ANSI and CSA Specs)	
	1001233237	Ref	3 Wire Connection (ANSI Export and CE Specs)	
	1001169720	Ref	Cold Weather Package	
	1001169732	Ref	Cribbing Switch Installation (ANSI Specs)	
	1001119459	Ref	Decals - ClearSky (All Specs Except Japanese Specs)	
	1001148902	Ref	Electrical Connector Kit - Amp/Tyco Electrical Connectors	
	1001148903	Ref	Electrical Connector Kit - Deutsch DT Electrical Connectors	
	1001148904	Ref	Electrical Connector Kit - Deutsch HD Electrical Connectors	
	1001148905	Ref	Electrical Connector Kit - Packard Electrical Connectors	
	1001148906	Ref	Electrical Connector Kit - Various Electrical Connectors	
	1001117294	Ref	Footswitch Shield Installation	
	1001209659	Ref	Fuel Cap Cover (Lockable) (Black)	
	1001209658	Ref	Fuel Cap Cover (Lockable) (Green)	
	1001120103	Ref	Ground Control Cover Installation	
	1001173326	Ref	Hot Weather Package	
	1001173140	Ref	Inverter Installation - 110V-50Hz (ANSI Export Spec)	
	1001169725	Ref	Inverter Installation - 120V-50/60Hz (ANSI, ANSI Export, CSA, Japanese and China Spec)	
	1001173139	Ref	Inverter Installation - 230V-50Hz (CE Spec)	
	1001169724	Ref	Inverter Installation - 240V-50Hz (ANSI Export, CSA and China Spec)	
	1001169723	Ref	Lights Installation - Chassis Worklights	
	1001170104	Ref	Lights Installation - Headlights and Taillights	
	1001120466	Ref	Lights Installation - Platform Worklights	
	1001183407	Ref	Low Temperature Cutout Installation (Russian Specs)	
	1001195304	Ref	Platform Console Cover Installation	
	1580013	Ref	Platform Corner Storage Tray	
	1001140318	Ref	Platform Mesh to Midrail Installation - 30in x 48in Platforms	
	1001140315	Ref	Platform Mesh to Midrail Installation - 30in x 60in Platforms	
	0273147	Ref	Platform Mesh to Toprail Installation - 30in x 48in Platforms	
	0273146	Ref	Platform Mesh to Toprail Installation - 30in x 60in Platforms	

SECTION 11 - SPECIAL OPTIONS

ITEM	PART NUMBER	QTY	DESCRIPTION	REV
	1001103558	Ref	Platform Rail Extension Installation (30in x 60in Platforms)	
	1001209059	Ref	Platform Work Surface	
	1001169726	Ref	Security Lock (Programmable) Installation	
		Ref	SkyGuard Component Options:	
	1001203510	Ref	SkyGuard Complete Add-on Kit (Without Strobe Light)	
	1001207138	Ref	SkyGuard Complete Add-on Kit (Blue Strobe Light)	
	1001210035	Ref	SkyGuard Complete Add-on Kit (Red Strobe Light)	
	1001149565	Ref	SkyGuard Platform Sensor Kit	
	1001137440	1	SkyGuard Sensor Harness	
	1001186431	2	Relay	
	1001207140	Ref	SkyGuard Strobe Light Kit (Blue)	
	1001210034	Ref	SkyGuard Strobe Light Kit (Red)	
	2901443	Ref	Tools - Analyzer Kit	
	1001137005	Ref	Tools - Cable Kit, Software	
	7002821	Ref	Tools - Crimper, Wire	
	4460510	Ref	Tools - Pin Extractor - 12-14 Gauge (For Removal of Pin/Sockets from Deutsch Connectors)	
	4460467	Ref	Tools - Pin Extractor - 16-18 Gauge (For Removal of Pin/Sockets from Deutsch Connectors)	
	7002823	Ref	Tools - Pin Extractor - Universal (For Electrical Connectors with Pins and Sockets)	
	7002822	Ref	Tools - Screwdriver, Potentiometer	
	7016654	Ref	Tools - Screwdriver, Magnetic	
	7004275	Ref	Tools - Seal Tool 1in (For Cylinders)	
	7004276	Ref	Tools - Seal Tool 1-1/2in (For Cylinders)	
	7002828	Ref	Tools - Stripper, Wire	

PART NUMBER INDEX

SECTION 11 - SPECIAL OPTIONS

0060044.....127, 131	0700818.....127, 129	0770815.....99	1001113680.....341
0100009.....161	0700820.....245, 249	0771618.....21	1001113961.....277
0100011.....13, 15, 17, 21, 37, 39, 43, 53, 57, 61, 73, 83, 86, 96, 99, 102, 117, 119, 121, 123, 125, 135, 137, 139, 151, 153, 155, 175, 179, 245, 249, 261	0700829.....245, 249	0860038.....219, 223	1001114761.....43
0100019.....21, 47, 99	0701012.....13	0860520.....337, 339, 341, 343, 345, 347, 349, 351, 353	1001115649.....121
0100020.....97, 173	0701015.....102	0861731.....305, 307, 309	1001115650.....121
0100035.....161, 165	0701016.....102	0861781.....297, 299	1001115657.....121
0100048.....73, 161	0701018.....53, 127, 129	0861880.....257	1001115661.....121
0100051.....35	0701019.....86	0940048.....121	1001115663.....121
0100081.....89, 91, 245, 249	0701020.....127, 129	0961845.....151, 153, 155	1001115669.....121
0100083.....97	0701022.....53	0961947.....131, 133	1001115672.....117, 119, 121
0140011.....161	0701027.....121	0961948.....121, 123, 125, 195, 197	1001115766.....117
0140043.....73	0701217.....13	0961950.....15	1001115773.....31
0273146.....362	0711227.....123, 125	0961951.....127, 129, 191, 193, 199	1001115784.....245
0273147.....362	0711426.....47	0962140.....13	1001115788.....227
0274661.....181	0711432.....47	0962224.....121	1001115870.....121
0275216.....221, 297	0721004.....53	0962257.....131, 133	1001116228.....139, 141
0275217.....225, 299	0760306.....96	0962259.....121	1001116361.....15, 189
0275218.....227, 301	0760410.....77, 96	0962292.....127, 129	1001116378.....189
0275219.....229, 303	0760505.....73, 96	0962449.....255	1001116433.....245, 249
0275452.....231, 305	0760508.....86, 89, 91, 102	1001091102.....77, 97	1001116487.....43, 45
0275453.....233, 307	0760512.....37	1001093687.....355	1001116546.....121
0275454.....235, 309	0760605.....21, 246, 250	1001094670.....127, 129	1001116547.....121
0340045.....102	0760606.....135	1001097051.....315, 317	1001116548.....121
0400209.....35	0760607.....21, 39, 261	1001097150.....257	1001116549.....121
0480100.....181	0760608.....67, 69, 73, 86, 89, 91, 99, 102, 245, 249, 261	1001097244.....159	1001116550.....127, 129
0630518.....65, 165	0760610.....21, 67, 69, 83, 86, 91, 96, 102, 135, 217, 221, 225, 227, 229, 231, 233, 235, 337, 339, 341, 343, 345, 347, 349, 351, 353	1001098122.....173, 287	1001116720.....273, 291
0630568.....162	0760612.....73, 86, 96, 102	1001098828.....135	1001116723.....275, 325, 327
0641404.....161, 179	0760613.....102	1001100341.....297	1001116732.....273, 327, 329
0641405.....179	0760614.....96, 159	1001100342.....299	1001116733.....273, 329
0641406.....102, 157	0760621.....73, 245, 249	1001100345.....305	1001116734.....273, 329
0641410.....102	0760807.....102	1001100346.....309	1001116774.....323
0641414.....175	0760808.....21, 35, 37, 39, 53, 86, 99, 261, 271	1001100347.....307	1001116788.....13, 201
0641418.....151, 155	0760810.....13, 73	1001102771.....35	1001116808.....323
0641420.....153	0760812.....35, 43, 53, 67, 69, 86, 99, 123, 125	1001103012.....329	1001116810.....259
0641506.....86	0760814.....96, 99	1001103257.....67	1001116811.....71
0641508.....102	0760816.....73	1001103258.....69	1001116812.....275, 277
0641514.....181	0760818.....13	1001103558.....363	1001116835.....139
0641605.....97	0761007.....137	1001104519.....293	1001116876.....123, 125
0641606.....37	0761009.....86	1001106736.....73	1001116877.....123, 125
0641608.....37	0761010.....13, 35, 121	1001106757.....245, 249	1001117025.....329
0641610.....99, 102	0761011.....86, 117, 119	1001107152.....245, 249	1001117057.....327
0641808.....102	0761012.....35, 53, 96, 117, 119, 245, 249	1001107781.....47, 49	1001117078.....277
0641822.....99	0761014.....73, 86, 96, 102, 117, 119, 135	1001107854.....329	1001117129.....31, 33
0641824.....102	0761015.....99, 117, 119, 121, 159	1001108290.....123, 125	1001117131.....31
0681608.....99, 135	0761016.....96	1001108923.....355	1001117132.....31
0681620.....183, 185	0761018.....13	1001109503.....58, 63	1001117172.....173
0682424.....183, 185	0761020.....35	1001109528.....117, 119	1001117174.....161, 173
0700408.....221, 225, 227, 229, 231, 233, 235	0761210.....86, 121	1001110434.....161	1001117281.....89, 91
0700608.....86	0761212.....117, 119, 121	1001110544.....97	1001117282.....86
0700610.....35, 159	0761214.....121	1001110613.....355	1001117294.....362
0700614.....97	0761215.....117, 119, 135	1001110873.....219	1001117365.....189
0700615.....79, 81	0761614.....15	1001112551.....339	1001117366.....189
0700617.....161	0761615.....121	1001112607.....117, 119	1001117372.....189
0700618.....221, 225, 227, 229, 231, 233, 235	0762016.....96	1001112612.....277, 323	1001117640.....117, 119, 195
0700628.....43		1001112796.....323	1001117884.....117, 127
0700808.....87		1001113047.....39	1001117885.....117, 119, 125
0700812.....53		1001113166.....349	1001117897.....53
0700815.....17		1001113168.....347	1001118262.....53
		1001113169.....345	1001118274.....123, 125, 139, 245, 249
		1001113170.....341	1001118280.....102
		1001113171.....353	
		1001113509.....351	

SECTION 11 - SPECIAL OPTIONS

1001118282.....273	1001119525.....210	1001123018.....103	1001149160.....13, 21
1001118287.....123, 125	1001119527.....53, 57, 61, 73, 137	1001125033.....273	1001149565.....363
1001118288.....123, 125	1001119572.....210	1001125235.....117, 119	1001151393.....58, 63
1001118292.....245, 249, 255	1001119576.....337, 339, 341, 343, 345, 347, 349, 351, 353	1001125291.....73	1001151788.....330
1001118361.....86, 89	1001119577.....210	1001125483.....337, 339, 341, 343, 345, 347, 349, 351, 353	1001151824.....330
1001118384.....311	1001119593.....210	1001126008.....275, 325, 327	1001152155.....211
1001118388.....291, 311	1001119594.....210	1001126009.....311	1001153015.....47, 51
1001118394.....127, 129	1001119595.....210	1001126245.....325, 327	1001153364.....47
1001118482.....127, 129	1001119596.....210	1001127549.....337, 339, 341, 343, 345, 347, 349, 351, 353	1001153612.....263, 265, 267, 269
1001118509.....53	1001119597.....210	1001127588.....337, 339, 341, 343, 345, 347, 349, 351, 353	1001155044.....161
1001118510.....53	1001119598.....210	1001127705.....210	1001155045.....161, 358
1001118511.....15	1001119600.....210	1001128781.....53	1001155743.....21
1001118518.....15	1001119602.....210	1001128782.....53	1001155934.....96, 359
1001118519.....15	1001119603.....210	1001128798.....53	1001155967.....13, 330
1001118592.....245, 249	1001119604.....210	1001129407.....73	1001156603.....103
1001118593.....245, 249	1001119605.....210	1001129555.....358	1001156604.....103
1001118595.....139	1001119619.....313	1001130220.....21, 35, 86	1001157406.....99, 109
1001118641.....27	1001119620.....315, 317, 319, 321	1001130588.....217	1001157903.....99
1001118642.....33	1001119803.....362	1001131269.....337, 345	1001158075.....103
1001118644.....29	1001119869.....219	1001132049.....74	1001158076.....103
1001118649.....27	1001119870.....215	1001132050.....74	1001158314.....103
1001118650.....33	1001119871.....223	1001135350.....275	1001159256.....161, 358
1001118651.....33	1001119872.....231	1001136244.....139, 143	1001159664.....103
1001118654.....29	1001119873.....233	1001137005.....363	1001159665.....96, 358
1001118657.....273	1001119874.....235	1001137440.....363	1001159754.....97, 359
1001118658.....273	1001119875.....221	1001137451.....86, 91	1001160531.....51
1001118660.....33	1001119876.....225	1001137673.....175, 359	1001161110.....13
1001118665.....121	1001119877.....229	1001138494.....151, 153	1001161113.....13
1001118666.....121	1001119937.....249	1001138514.....151, 153	1001161114.....13
1001118744.....273	1001119953.....249, 281	1001139654.....343, 355	1001161115.....13
1001118745.....273	1001119954.....249, 285	1001140315.....362	1001161117.....13
1001118746.....103	1001119955.....239, 249	1001140318.....362	1001161537.....86
1001118961.....47	1001119956.....243, 249	1001140429.....151, 153, 155	1001161710.....161, 358
1001119018.....245, 279	1001119962.....362	1001140524.....246, 250, 253	1001161871.....261, 325, 327
1001119019.....245, 283	1001119981.....337, 339, 341, 343, 345, 347, 349, 351, 353	1001141300.....355	1001161872.....39
1001119020.....288, 323, 325, 327, 330	1001120002.....337	1001141581.....21	1001161873.....39
1001119028.....362	1001120004.....345	1001141710.....73	1001161874.....39
1001119077.....91	1001120087.....96, 103	1001141967.....301, 303	1001161876.....39
1001119080.....86	1001120090.....96, 103	1001141968.....301	1001161878.....39
1001119083.....86	1001120103.....362	1001141969.....303	1001161891.....261
1001119085.....86	1001120204.....237, 239	1001141970.....303	1001161924.....261
1001119086.....91	1001120205.....241, 243	1001141971.....301	1001161935.....35
1001119087.....91	1001120279.....349	1001142683.....79, 81, 359	1001161936.....35
1001119088.....91	1001120280.....351	1001142736.....79, 81, 323	1001161937.....35
1001119089.....89	1001120281.....347	1001144433.....175	1001161938.....37
1001119090.....89	1001120282.....341	1001144629.....147, 149	1001161943.....261
1001119091.....89	1001120283.....353	1001146824.....86	1001161944.....261
1001119092.....86	1001120328.....175, 179	1001147365.....103	1001161947.....35
1001119103.....86	1001120466.....362	1001147440.....91	1001161948.....261
1001119139.....241, 245	1001120749.....91	1001147441.....86, 91	1001161949.....261
1001119140.....237, 245	1001120974.....125, 203	1001147642.....103	1001162045.....35
1001119170.....73	1001120976.....117, 119, 199	1001147643.....103	1001162046.....35
1001119176.....73, 358	1001121172.....273, 329	1001148902.....362	1001162047.....35
1001119194.....245	1001121221.....210	1001148903.....362	1001162048.....35
1001119195.....249	1001121672.....29	1001148904.....362	1001162049.....35
1001119197.....245, 249	1001121678.....27	1001148905.....362	1001162050.....35
1001119228.....246, 250	1001121966.....210	1001148906.....362	1001162117.....53
1001119369.....129, 133	1001122527.....121, 197	1001148975.....103	1001162614.....43
1001119370.....119, 129	1001123004.....127, 129, 193		1001162748.....53
1001119371.....119			1001162823.....99
1001119378.....362			1001163363.....103
1001119455.....210			1001164412.....271
1001119459.....362			1001164418.....271
1001119504.....137			1001164494.....271
1001119513.....137			1001164495.....271

SECTION 11 - SPECIAL OPTIONS

1001164654.....	271	1001169723.....	362	1001177378.....	271, 275	1001197707.....	67, 69, 71
1001164885.....	13	1001169724.....	362	1001177433.....	271, 273	1001197941.....	73, 271
1001165144.....	17, 19	1001169725.....	362	1001178594.....	53, 358	1001197942.....	73, 261
1001165751.....	99, 111	1001169726.....	363	1001178595.....	53, 358	1001197943.....	73
1001165851.....	58, 63	1001169732.....	362	1001178731.....	53	1001197944.....	271
1001165923.....	73, 329	1001170058.....	337, 339, 341, 343, 345, 347, 349, 351, 353	1001178795.....	211	1001199306.....	193, 203
1001166433.....	86	1001170059.....	343	1001179948.....	21	1001199413.....	123
1001166538.....	161, 167	1001170060.....	339, 343	1001180464.....	73	1001199460.....	193
1001166539.....	161, 169	1001170061.....	337, 339, 341, 343, 345, 347, 349, 351, 353	1001181045.....	257	1001199461.....	123, 203
1001166733.....	327	1001170102.....	35	1001182806.....	83	1001200491.....	135
1001166848.....	210	1001170104.....	362	1001182809.....	337, 339, 341, 343, 345, 347, 349, 351, 353	1001200910.....	79
1001167206.....	210	1001170140.....	21, 358	1001183213.....	73, 358	1001201939.....	73
1001167207.....	210	1001170365.....	35, 358	1001183402.....	325, 327	1001202223.....	103
1001167208.....	210	1001170367.....	37, 358	1001183405.....	325, 327	1001203510.....	363
1001167210.....	210	1001170483.....	35	1001183406.....	43	1001203719.....	73
1001167238.....	17, 43, 139	1001170484.....	37, 358	1001183407.....	362	1001204948.....	86
1001167516.....	99, 105	1001170571.....	103	1001183548.....	37	1001205158.....	53
1001167538.....	35, 259	1001170669.....	353	1001183675.....	211	1001205844.....	53
1001168018.....	99, 103	1001170670.....	341	1001184022.....	35	1001207004.....	81
1001168098.....	96, 271	1001170671.....	347	1001184133.....	35, 37	1001207138.....	363
1001168210.....	191	1001170672.....	345	1001184135.....	37	1001207140.....	363
1001168222.....	103	1001170673.....	351	1001184137.....	37	1001207227.....	79, 81
1001168224.....	103	1001170674.....	349	1001184793.....	261	1001207961.....	87
1001168225.....	103	1001170676.....	337	1001184846.....	329	1001208285.....	13
1001168226.....	103	1001170760.....	275, 325, 327, 358	1001185281.....	162	1001209059.....	363
1001168227.....	103	1001170762.....	259, 358	1001186231.....	275	1001209658.....	362
1001168228.....	103	1001170763.....	259, 287	1001186375.....	151	1001209659.....	362
1001168229.....	103	1001170861.....	37	1001186377.....	153	1001209664.....	175
1001168230.....	103	1001170981.....	103	1001186386.....	149	1001210034.....	363
1001168232.....	99	1001171295.....	325, 327, 358	1001186387.....	147	1001210035.....	363
1001168233.....	99	1001171296.....	351	1001186431.....	175, 358, 363	1001210829.....	43
1001168234.....	86	1001171301.....	261	1001186432.....	291, 293, 311	1001210981.....	15
1001168236.....	96	1001171777.....	35	1001186489.....	259, 358	1001211947.....	261, 265
1001168237.....	96	1001171823.....	113	1001186517.....	175	1001212041.....	83
1001168238.....	103	1001171914.....	113	1001186845.....	67, 69	1001212415.....	358
1001168239.....	97	1001172045.....	362	1001187235.....	103	1001213447.....	287
1001168240.....	96	1001172064.....	329	1001187674.....	177	1001213882.....	162
1001168241.....	97	1001172074.....	273	1001187681.....	313	1001214029.....	355
1001168242.....	96	1001172227.....	329, 358	1001188622.....	135	1001215228.....	162
1001168244.....	97	1001172394.....	73	1001188644.....	135	1001216630.....	135
1001168400.....	21	1001172395.....	73	1001188866.....	13	1001217227.....	135
1001168662.....	73	1001172396.....	73	10011889105.....	97	1001217228.....	135
1001168663.....	73	1001172541.....	73	1001189108.....	97	1001217242.....	135
1001168669.....	13	1001172556.....	210	1001189611.....	211	1001217243.....	135
1001168702.....	210	1001172557.....	210	1001189794.....	99	1001217244.....	135
1001169015.....	13	1001172558.....	210	1001189795.....	99	1001217253.....	135
1001169027.....	15	1001172560.....	162	1001189868.....	99	1001217254.....	135
1001169028.....	13	1001172773.....	77	1001189882.....	343, 355	1001217267.....	135
1001169030.....	13	1001173139.....	362	1001190529.....	261, 263	1001219601.....	73, 358
1001169092.....	162	1001173140.....	362	1001190530.....	261, 267	1001220644.....	275
1001169129.....	13	1001173326.....	362	1001190531.....	261, 269	1001221400.....	58
1001169195.....	53	1001173703.....	355	1001190545.....	97, 358	1001221401.....	63
1001169196.....	53	1001174019.....	67	1001190609.....	96	1001223055.....	337
1001169213.....	15	1001174020.....	69	1001190663.....	83	1001223971.....	345
1001169292.....	21, 261	1001174449.....	337, 339, 341, 343, 345, 347, 349, 351, 353	1001190985.....	135	1001224048.....	351
1001169311.....	339	1001176229.....	329	1001193018.....	221, 225, 227, 229, 231, 233, 235	1001224049.....	353
1001169317.....	343	1001176230.....	329	1001193549.....	261	1001224050.....	347
1001169415.....	86	1001176304.....	99	1001193550.....	261	1001224052.....	341
1001169417.....	86	1001176469.....	63	1001195304.....	362	1001224053.....	349
1001169418.....	86			1001197294.....	21	1001224891.....	137
1001169419.....	86			1001197509.....	211	1001225131.....	35
1001169420.....	67, 69			1001197652.....	271	1001225557.....	261
1001169422.....	162, 295					1001225558.....	261
1001169594.....	162, 359					1001225580.....	175, 291, 293
1001169683.....	21, 23					1001225990.....	117, 119, 191
1001169719.....	113						
1001169720.....	362						

SECTION 11 - SPECIAL OPTIONS

1001226400.....279, 281, 283, 285	1001247060.....159, 161	1580013.....362	1703950.....349
1001226872.....155	1001247061.....73	1670899.....245, 249	1703951.....351
1001227454.....362	1001247062.....337	1671092.....246, 250	1703952.....341
1001227633.....177	1001247063.....349	1671093.....246, 250	1703953.....337
1001227634.....177	1001247064.....351	1701499337, 339, 341, 343, 345, 347, 349, 351, 353	1703980.....349
1001227985.....177	1001247065.....345	1701500337, 339, 341, 343, 345, 347, 349, 351, 353	1703981.....351
1001227987.....177	1001247066.....347	1701504337, 339, 341, 343, 345, 347, 349, 351, 353	1703982.....347
1001227996.....315, 317, 319, 321	1001247067.....341	1701509337, 339, 341, 343, 345, 347, 349, 351, 353	1703983.....353
1001228215.....155	1001247068.....353	1701517339, 343	1703984.....345
1001228224.....177	1001247069.....57	1701518339, 343	1703985.....341
1001228225.....177	1001247070.....57, 58	1701529337, 339, 341, 343, 345, 347, 349, 351, 353	1704000.....345
1001228370.....337, 345	1001247071.....61	1701642337, 339, 341, 343, 345, 347, 349, 351, 353	1704001.....353
1001228627.....135	1001247072.....61, 63	1701644337, 339, 341, 343, 345, 347, 349, 351, 353	1704002.....341
1001228956.....362	1001247468.....135	1702155337, 339, 341, 343, 345, 347, 349, 351, 353	1704260.....161
1001229107.....362	1001247540.....162	1702565161	1704277....337, 339, 341, 343, 345, 347, 349, 351, 353
1001229341.....177	1001248140.....183, 185	1702566161	1704286.....355
1001231153.....121	1001248141.....183, 185	1702567161	1704368.....355
1001231801.....355	1001252629.....183, 185	1702773355	1704369.....355
1001231886.....83	1001252947.....181	1702774355	1704370.....355
1001232164.....177	1001253375.....293	1702860355	1704371.....355
1001232165.....177	1001253920.....337	1702868337	1704372.....355
1001232642.....179	1001253921.....337	1703797337	1704412....337, 339, 341, 343, 345, 347, 349, 351, 353
1001232650.....179	1001253923.....345	1703798337	1704885.....355
1001232667.....179	1001253924.....351	1703804337	1704972.....355
1001233237.....362	1001253925.....351	1703805337	1705325.....221
1001235011.....179	1001253926.....347	1703923353	1705344.....349
1001235013.....179	1001253927.....347	1703924345	1705345.....351
1001236552.....179	1001253928.....341	1703925347	1705347.....345
1001236891.....183, 185	1001253929.....341	1703926349	1705348.....347
1001236895.....183, 185	1001253930.....353	1703927351	1705349.....341
1001237667.....277, 287	1001253931.....353	1703928341	1705351.....337
1001237668.....277, 287	1001253932.....345, 349	1703935353	1705426.....349
1001237862.....315, 319	1001253933.....349	1703936345	1705427.....351
1001237863.....177, 315, 317	1001255901.....327	1703937347	1705429.....345
1001237864.....177, 319, 321	1001257271.....183, 185	1703938349	1705430.....347
1001237865.....177, 313	1001257274.....183, 185	1703939351	1705822.....339, 343
1001238238.....103, 105	1001257275.....185	1703940341	1705828.....339, 343
1001238239.....99, 102	1001257690.....255	1703941353	1705910.....353
1001238241.....96, 99	1001258005.....185	1703942345	1705917.....353
1001238263.....183, 185	1001258495.....317, 321	1703943347	1705921.....339, 343
1001238319.....177	1001261335.....183	1703944349	1705929.....337
1001238418.....179, 311	1001261338.....183	1703945351	1705961.....339, 343
1001238472.....179	1001266066.....74	1703946341	1705968.....347
1001238477.....179	1060379.....181	1703947353	1705969.....351
1001238495.....175	1060908.....257	1703948345	1705978.....339, 343
1001238559.....179	1060918.....173	1703949347	1706059.....355
1001238732.....65, 165	10837580.....45, 203	1703950349	1706060.....355
1001238824.....179	1320022.....96, 102	1703951.....351	1706061.....355
1001241965.....179	1320041.....21, 249	1703952.....341	1706062.....355
1001242519.....21, 25	1320043....217, 221, 225, 227, 229, 231, 233, 235, 245	1703953.....337	1706063.....355
1001242849.....79	1320130.....97, 245, 249	1703954.....341	1706064.....355
1001242850.....81	1320136.....99, 135	1703955.....347	1706077....339, 343, 349
1001245161.....165	1320159.....17	1703956.....349	1706085.....353
1001245163.....65	1320222.....102	1703957.....351	1706089.....341
1001245178.....65, 165	1320224.....102	1703958.....341	1706093.....347
1001245207.....165	1320265.....96	1703959.....341	1706097.....345
1001245209.....65	1320274.....99	1703960.....341	1706098.....355
1001245668.....162, 287	1321293.....67, 69, 73	1703961.....341	2080040.86, 91, 147, 149
1001245669.....74, 333	1321682.....102	1703962.....341	2080050.....86
1001246486.....362	1321716.....73, 96	1703963.....341	2080057....337, 339, 341, 343, 345, 347, 349, 351, 353
1001246487.....362	1340069.....102	1703964.....341	
1001246670.....74, 277	1380136.....43	1703965.....341	
1001247059.....159	1380138.....39	1703966.....341	
	1580011.....102	1703967.....341	
	1580012.....157	1703968.....341	

SECTION 11 - SPECIAL OPTIONS

2180348.....96	3271801.....99, 102	3520198.....147, 149, 151, 153, 155	4460224.....161
2180666.....96	3272001.....183, 185	3572551.....127, 129	4460225.....287
2220124.....47	3290301.....97	3740086.....311	4460226.....161, 167, 170, 173
2220371.....210	3290401.....35, 37	3760115.....123, 125	4460227.....287, 329
2220408.....211	3290405.....73, 77, 97, 159, 221, 225, 227, 229, 231, 233, 235, 245, 249	3760308.....39	4460233.....223
2220415.....210	3290505.....37, 39, 86, 89, 91	3790012.....161	4460234.....73, 161
2220451.....210	3290601.....21, 43, 83	3820019.....39	4460259.....273, 277, 287, 295
2220466.....210	3290605.....67, 69, 73, 86, 89, 91, 96, 102, 135, 159, 217, 221, 225, 227, 229, 231, 233, 235, 245, 249, 337, 339, 341, 343, 345, 347, 349, 351, 353	3820020.....43, 147, 149	4460260.....273, 277, 287, 295
2220472.....210		3820032.....53	4460265.....167, 170
2220473.....210		3841143.....117, 119, 121, 135	4460267.....275, 287, 325, 327
2220498.....210		3841203.....117, 119, 121	4460268.....259
2220501.....210		3841258.....15, 121	4460312.....329
2220577.....210		3841520.....13	4460313.....277
2220582.....210		3900085.....79, 81	4460315.....219, 223
2220606.....211		3900174.....39	4460320.....275, 325, 327
2220635.....210		3900349.....161	4460346.....219
2220819.....210		3910804.....58, 63	4460374.....325
2220828.....210		3931408.....175	4460375.....325
2220881.....189		3931832.....47	4460418.....277, 287
2220883.....189, 191		3960422.....219, 223	4460419.....277, 287
2220885.....189		3960447.....39	4460424.....259
2220887.....210		3990010.....329, 358	4460428.....161
2220914.....211		4010618.....151, 153	4460434.....287
2220940.....210		4031505.....177	4460464.....13, 35, 73, 173, 255, 259, 277, 283, 285, 287, 291, 293, 295, 311, 323, 325, 327, 330, 333
2220947.....210		4031507.....21, 23	4460465.....74, 77, 83, 253, 255, 259, 263, 265, 267, 269, 273, 275, 277, 279, 281, 283, 285, 287, 291, 293, 295, 323, 325, 327, 329, 330, 333
2221042.....211		4031510.....97, 245, 249	4460466.....74, 161, 177, 253, 255, 259, 273, 277, 279, 281, 283, 285, 287, 291, 293, 295, 311, 313, 323, 325, 327, 329, 330, 333
2221086.....210		4031512.....73, 245, 249	4460467.....363
2400044.....35, 37		4031516.....179	4460470.....161
2400060.....259, 273, 275, 325, 330		4031714.....97	4460471.....161
2400064.....329, 358		4032009.....21	4460473.....246, 250, 279, 281, 283, 285
2400065.....329, 358		4060092.....223	4460488.....79, 81, 161
2400066.....273, 329		4060804.....135	4460496.....73, 277
2540045.....96		4060805.....135	4460497.....73, 277
2560122.....43		4060808.....245, 249	4460508.....177, 283, 285, 287, 295, 330
2560136.....161		4070897.....123, 125	4460509.....259, 273, 279, 281, 283, 285, 329
2600281.....147, 149		4070898.....123, 125	4460510.....363
2720058.....96, 102		4100066.....210	4460516.....23
2720271.....96, 102		4191707.....21	4460518.....323
2820031.....246, 250		4240018.....13, 73, 97, 210, 245, 249, 261	4460536.....13, 287, 325, 327
2820118.....279, 281, 283, 285		4240032.....73, 79, 81, 161	4460539.....267, 277, 287, 325, 333
2820247.....315, 317, 319, 321		4240033.....175, 177, 179, 271	4460611.....102
2860030.....58, 63, 358		4240084.....21	4460662.....231, 235
2900770.....131, 191, 193, 203		4240156.....245, 249	4460670.....275, 325, 327
2901443.....363		4360328.....58, 63, 358	
2902549.....217, 221, 225, 227, 229, 231, 233, 235, 257		4360387.....63, 161, 358	
2915230.....71		4360407.....161, 358	
2920028.....161		4360469.....58, 63, 358	
2920161.....77		4360475.....58, 63, 161, 358	
2940074.....147, 149, 359		4360476.....58, 63, 161	
2940095.....39		4360548.....245, 249, 255, 359	
2940109.....89, 91		4420051.....355	
3020029.....15		4420062.....181	
3020037.....53		4460016.....287	
3020039.....21		4460019.....259, 273	
3160252.....53, 55		4460042.....277	
3251243.....215, 219		4460071.....173, 219, 223	
3251813.....355		4460115.....277	
3252347.....337		4460121.....217	
3252507.....217, 223, 225, 227, 229, 231, 233, 235		4460125.....223	
3271605.....183, 185		4460142.....273, 330	
		4460183.....287	
		4460205.....219	

SECTION 11 - SPECIAL OPTIONS

4460702.... 263, 265, 267, 269	4461070..... 323	4811902 ..21, 43, 99, 123, 125, 127, 129	70002646.....51
4460703..... 325, 327	4461076.....23	481200035, 39, 86, 96, 99, 102, 117, 119, 121, 135, 137, 245, 249	70002647.....51
4460708..... 161, 287	4461077....263, 265, 267, 269, 311, 313	4812002 53, 139, 159	70002648.....51
4460761..... 287, 329	4461095..... 323	4812100 13, 135	70002649.....51
4460836..... 273, 329	4461109..... 273	481230086	70002650.....51
4460837..... 273, 329	4461110..... 330	4812500 96, 99	70002651.....51
4460851..... 325, 327	4461111..... 273	4831900 35, 37, 261, 271	70002652.....51
4460852..... 325, 327	4461112..... 330	4845582181	70002656.....51
4460865.... 245, 249, 279, 281, 283, 285	4461117..... 275	4872000271	70002657.....51
4460866.... 245, 249, 287, 330	4461196..... 297	489150053	70002658.....51
4460868.....277	4461198..... 297	4891600135	70002659.....51
4460871..... 83, 275, 277, 287, 325, 327, 329, 333	4461199..... 299	4891800 99, 102	70002661.....51
4460872.....333	4461201..... 299	4923463239, 243	70002663.....51
4460873.... 275, 287, 325, 327, 329	4461205....301, 303, 305, 307	4923505237, 241	70002664.....51
4460874..... 287, 329	4461222..... 273, 330	5221000137	70002665.....51
4460875..... 287, 333	4461244..... 305	524060086	70002666.....51
4460876.....277	4461245..... 307	524100015	70002667.....51
4460877.....277	4461246..... 309	5241200123, 125, 135	70002668.....51
4460878..... 329	4461249..... 309	524140047	70002669.....51
4460879.....287	4461290....23, 263, 265, 267, 269, 275	524160021	70002670.....51
4460884.... 277, 291, 293, 330	4520605.....31	5250808139	70002671.....51
4460887..... 287, 329	4640113.....31, 33	5250810 17, 43, 139, 210	70002842..... 189
446089177, 83, 253, 255, 259, 275, 277, 323, 325, 327, 330, 333	4640858..... 189	5250812139	70002901.....96
4460892.....329	4641129.....19	5251008135	70002902..... 173
4460894..... 74, 253, 255, 277, 287, 325, 327, 329	4711400....102, 151, 153, 155, 175, 179	5251010117, 119, 123, 125	70002903..... 173
4460897..... 35, 275, 277, 325, 327, 330	4711500..... 102	525101215, 123, 125	70002904..... 173
4460899.... 291, 293, 295, 311, 313, 330	471160097, 99, 162, 183, 185	5251016135	70002905..... 173
4460905.... 275, 277, 287, 325, 327, 329, 333	4712000..... 183, 185	5260800245, 249	70002954..... 143
4460910.....319, 321	4740086.....13	527160939	70002963.....19, 143, 358
4460911.....313	4740158.....15	527172321	70002964.....45
4460928.... 263, 265, 267, 269, 323	4740171.....47	5281920245, 249	70002965.....45
4460929.... 263, 265, 267, 269	4740362..... 102, 159	70000088.....49	70002966.....45
4460930..... 71, 263, 265, 267, 269, 329	4740397..... 161	70000089.....49	70002967.....45
4460931.... 259, 325, 327, 333	4740505.....13	70000341.....131	70002968.....45
4460933.... 161, 287, 323, 325, 327, 329, 333	4751000.....79, 81	70000681.....51	70002969.....45
4460941.....313	4751400....102, 157, 161	70001697.....133	70002970.....45
4460942..... 177, 325	4751500..... 181	70002311.....49	70002971.....45, 358
446094379, 81, 277, 287, 313, 330	4751600....99, 102	70002312.....49	70002972.....45
4460944.... 267, 275, 277, 287, 325, 327	4761400..... 157	70002313.....49	70002973.....45
4460956.....257	4761600.....37	70002315.....105	70002974.....45
4460957.....257	4792000..... 271	70002318.....105	70002976.....45
4460968.... 221, 225, 227, 229, 233, 255	4811400....21, 35, 37, 73, 97, 159, 221, 225, 227, 229, 231, 233, 235, 245, 249	70002334 ..193, 195, 197	70002977.....45
4460970.....255, 287	4811600....37, 86, 89, 91, 99, 102	70002335 ..191, 193, 195, 197, 199, 203	70003060..... 105
4460994.... 275, 325, 327	4811702....73, 86, 97, 99, 102, 135, 159, 246, 250	70002337197, 201	70003061..... 105
4461012..... 159	4811700....21, 35, 39, 43, 67, 69, 73, 79, 81, 83, 86, 89, 91, 96, 102, 151, 153, 217, 221, 225, 227, 229, 231, 233, 235, 245, 249, 261, 337, 339, 341, 343, 345, 347, 349, 351, 353	70002344195	70003063..... 106
4461017.....330	4811900....13, 17, 21, 35, 43, 53, 67, 69, 86, 96, 99, 102, 245, 249	70002352199, 203	70003064..... 106
4461018.....273, 329		70002354199	70003071..... 197
		70002364203	70003072..... 197
		70002366 ..191, 199, 203	70003073..... 197
		70002372193	70003074..... 197
		70002373193	70003075..... 197
		70002375193	70003076....193, 195, 197
		70002380201	70003077..... 197, 201
		70002386 43, 45, 141, 193, 195, 197, 358	70003078..... 197, 201
		70002389203	70003079..... 197, 201
		70002410197	70003080..... 197, 201
		70002412195	70003081....191, 197, 199
		70002413191	70003082..... 195, 197
		7000264351	70003083..... 195, 197
		7000264451	70003084..... 199
		7000264551	70003085..... 191, 199
			70003086..... 199
			70003088..... 199
			70003089....191, 199, 203
			70003090....191, 199, 203
			70003091....191, 199, 203
			70003092....191, 199, 203

SECTION 11 - SPECIAL OPTIONS

70003093.....	191, 193, 199	70004739.....	167	70004819.....	23	70005029.....	25
70003094.....	191, 193, 199	70004740.....	167	70004820.....	23	70005031.....	25
70003095.....	201	70004741.....	167	70004821.....	23	70005032.....	25
70003096.....	201	70004742.....	167	70004822.....	23	70005035.....	25
70003097.....	201	70004743.....	167	70004827.....	23	70005037.....	25
70003098.....	201	70004744.....	167	70004828.....	105	70005038.....	25
70003099.....	201	70004745.....	167	70004829.....	105, 106	70005040.....	25
70003100.....	201	70004746.....	167	70004830.....	105	70005041.....	25
70003101.....	201	70004747.....	167	70004832.....	105	70005042.....	25
70003102.....	201	70004748.....	167	70004833.....	105	70005043.....	25
70003103.....	195	70004749.....	167	70004834.....	105	70005044.....	25
70003104.....	195	70004750.....	167	70004836.....	105	70005045.....	25
70003105.....	195	70004751.....	167	70004837.....	105	70005047.....	25
70003106.....	195	70004752.....	169	70004838.....	105	70005062.....	25
70003108.....	195	70004753.....	169	70004839.....	105	70005063.....	25
70003109.....	195	70004754.....	169	70004840.....	105	70005228.....	105
70003110.....	195	70004755.....	169	70004841.....	105	70005293.....	96
70003111.....	195	70004756.....	169	70004843.....	105	70005294.....	96
70003112.....	195	70004757.....	169	70004844.....	105	70005295.....	96
70003113.....	195	70004758.....	169	70004846.....	105	70005296.....	96
70003114.....	203	70004759.....	169	70004847.....	105	70005297.....	96
70003115.....	203	70004760.....	169	70004848.....	105	70005560.....	25
70003116.....	203	70004761.....	169	70004849.....	105	70005695.....	191
70003117.....	203	70004762.....	169	70004851.....	106	70005722.....	43
70003118.....	193, 203	70004763.....	169	70004852.....	106	70005818.....	53
70003119.....	203	70004764.....	169	70004853.....	106	70005973.....	191
70003120.....	203	70004765.....	169	70004854.....	106	70005974.....	191
70003121.....	203	70004766.....	169	70004855.....	105	70006007.....	106
70003122.....	193	70004767.....	169	70004856.....	106	70006008.....	106
70003123.....	193	70004768.....	169	70004857.....	106	70006269.....	137
70003124.....	193	70004769.....	169	70004858.....	106	70006280.....	137
70003125.....	193	70004770.....	169	70004859.....	106	70006353.....	191
70003126.....	193	70004771.....	169	70004860.....	106	70007208.....	25
70003127.....	193	70004772.....	169	70004861.....	106	70007209.....	25
70003128.....	193	70004773.....	169	70004912.....	106	70007210.....	25
70003129.....	193	70004774.....	170	70004913.....	106	70007211.....	25
70003130.....	193	70004775.....	170	70004984.....	111	70007212.....	25
70003131.....	191	70004787.....	19	70004985.....	111	70007213.....	25
70003132.....	191	70004788.....	19	70004986.....	111	70007214.....	25
70003133.....	191	70004789.....	19	70004987.....	111	70007215.....	25
70003134.....	191	70004790.....	109	70004988.....	111	70007216.....	25
70003138.....	51	70004791.....	109	70004989.....	111	70007217.....	25
70003139.....	51	70004792.....	109	70004990.....	111	70007218.....	25
70003141.....	51	70004793.....	109	70004991.....	111	70007219.....	25
70003142.....	51	70004796.....	103	70004992.....	111	70007220.....	25
70003453.....	193	70004797.....	23	70004993.....	111	70007221.....	25
70003757.....	45	70004798.....	23	70004994.....	111	70022565.....	195
70003784.....	161	70004799.....	23	70004995.....	111	70023370..	193, 195, 197, 203
70003788.....	45, 358	70004800.....	23	70004996.....	111	70023371.....	199
70004069.....	96	70004801.....	23	70004997.....	111	7002821.....	363
70004070.....	96	70004802.....	23	70004998.....	111	7002822.....	363
70004294.....	105	70004803.....	23	70004999.....	111	7002823.....	363
70004295.....	105	70004804.....	23	70005000.....	111	7002828.....	363
70004296.....	105	70004805.....	23	70005001.....	111	7004035.....	49
70004297.....	105	70004806.....	23	70005002.....	111	7004043.....	49
70004305.....	106	70004807.....	23	70005003.....	111	7004044.....	49
70004306.....	106	70004808.....	23	70005004.....	111	7004275.....	363
70004311.....	105	70004809.....	23	70005005.....	111	7004276.....	363
70004322.....	133	70004810.....	23	70005006.....	111	70050516.....	19, 358
70004323.....	131, 133	70004811.....	23	70005007.....	111	7010543.....	45, 141, 203
70004398.....	105	70004812.....	23	70005019.....	25	7011323.....	131
70004524.....	105	70004813.....	23	70005020.....	25	7012540.....	19
70004537.....	105	70004814.....	23	70005022.....	25	7012545.....	55
70004538.....	105	70004815.....	23	70005024.....	25	7012548.....	55
70004539.....	105	70004816.....	23	70005025.....	25	7012549.....	55
70004540.....	105	70004817.....	23	70005027.....	25	7012907.....	19
70004738.....	167	70004818.....	23	70005028.....	25		

SECTION 11 - SPECIAL OPTIONS

7012941.....	141	7017463.....	19	7021653.....	19, 45	7027359.....	51
7012953.....	141	7017467.....	43	7023107.....	105	7027900.....	131, 133
7012955.....	141, 143	701749643, 45, 193, 195,		7023114.....	106	7027901.....	131, 133
7012967.....	43, 141, 143,	197		7023124.....	106	7028909.....	79, 81
	193, 195, 197	7017498.....	143	7023154.....	105	80233041.....	210
7012998.....	19, 45, 143	7017901.....	106	7023167.....	105	80325.....	86
7015004.....	102, 358	7017914.....	105	7023168.....	105	8220007.....	273
7015005.....	103	7017934.....	105	7023170.....	106	8220045.....	275
7016319.....	77	7017980.....	105, 358	7023200.....	55	8229242.....	327, 358
7016372.....	77	7017982.....	105	7023272.....	55	8229244.....	329, 358
7016654.....	363	7017983.....	105	7023970.....	141	8229245.....	273
7017120.....	131	7017984.....	105	7024379.....	49	8229246.....	273
7017121.....	131	7017988.....	105	7024380.....	49	8229247.....	273
7017122.....	131, 133	7017992.....	105, 358	7024381.....	49	8305919.....	161
7017123.....	131, 133	7017995.....	105	7024389.....	49	8310612.....	35, 37
7017126.....	131, 133	7020175.....	58, 63, 161	7024390.....	49	8310668.....	137
7017127.....	131	7020176.....	58, 63, 161	7024453.....	49	8310686.....	210
7017172.....	131, 133	7020291.....	55	7024884.....	193, 195, 197	8405102.....	102
7017192.....	131, 133	7020292.....	55	7026041.....	51	8406201.....	97
7017196.....	131, 133	7020293.....	55	7026048.....	51	85031405.....	271
7017402.....	141, 143	7020294.....	55	7026049.....	51	85941016.....	99
7017406.....	45	7020295.....	55	7026052.....	51	88521214.....	183, 185
7017408.....	19	7020296.....	55	7027350.....	51	91043147.....	97
7017427.....	143	7020297.....	55	7027351.....	51		
7017452.....	141, 143	7020298.....	55	7027352.....	51		
7017455.....	19	7020299.....	55	7027353.....	51		



An Oshkosh Corporation Company

Corporate Office
JLG Industries, Inc.
1 JLG Drive
McConnellsburg, PA 17233-9533 USA
☎ (717) 485-5161 (Corporate)
☎ (877) 554-5438 (Customer Support)
📠 (717) 485-6417

Visit our website for JLG Worldwide Locations.
www.jlg.com